



R-40 Residential Zone


The intent of the R-40 zone is to provide designated areas of the County for moderate density residential uses. The predominant use is residential in a duplex or detached house. A limited number of other building types may be allowed under the optional method of development.

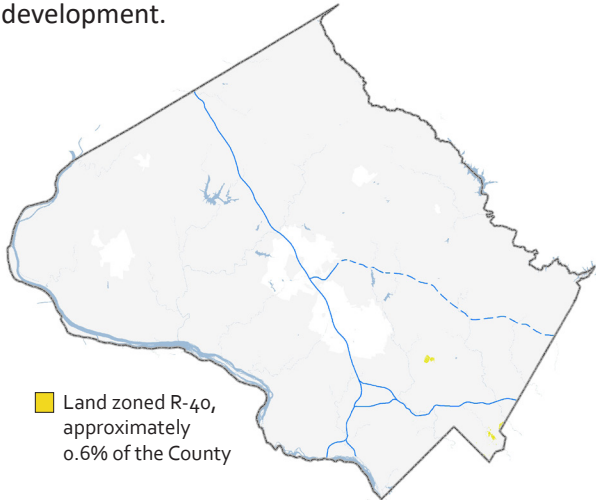

Existing detached house development in the R-40 zone

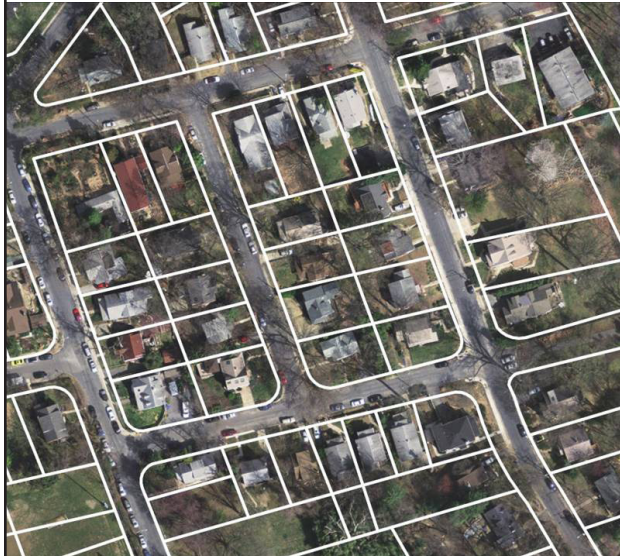


Illustrative Depiction of Standards for Detached House* Building Type

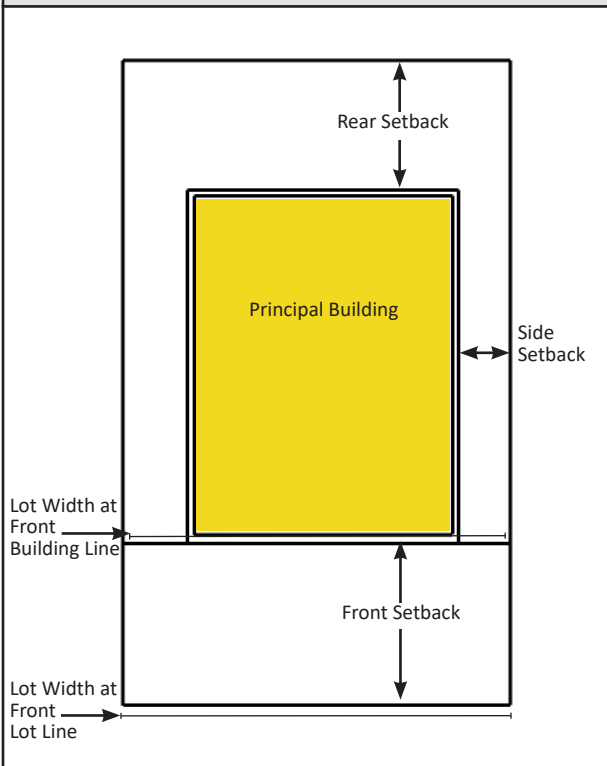

Side Section of Structure (Principal Building)

Height is measured from the average grade to the mean height level between eaves and ridge of a gable, hip, mansard, or gambrel roof or to the highest point of roof surface of a flat roof.

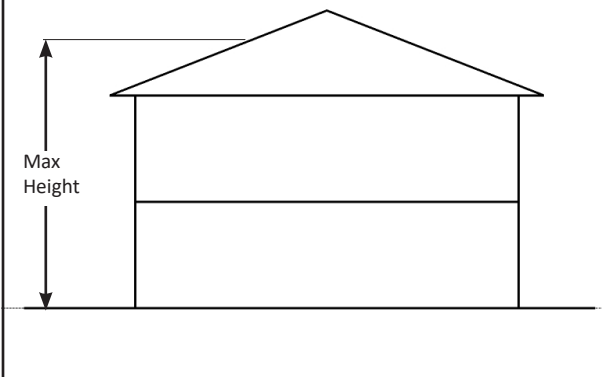


Standard Method of Development for Detached House* Building Type


A. Lot	R-40
Lot Area (min)	6,000 sf
Lot Width (min)	
At front building line	60'
At front lot line	25'
Density (max)	
Density (units/acre)	7.26 u/a
B. Placement	
Principal Building (min)	
Front setback	25'^^
Side street setback, abutting lot fronts on the side street and is in a Residential Detached zone	25'^^
Side street setback, abutting lot does not front on the side street or is not in a Residential Detached zone	15'
Side setback	8'
Sum of side setbacks	18'
Rear setback	20'
Coverage (max)	
All roofed buildings and structures (including accessory structures)	35%^^
C. Height	
Principal Building (max)	
Measured to highest point of a flat roof	35'***
Measured to mean height between eaves and ridge of a gable, hip, mansard, or gambrel roof	30'***
^ Subject to Established Building Line	
^^ Residential Infill Compatibility standards apply	
*** 40' if approved by Planning Board through site plan	
Accessory Structures	
For development standards regarding accessory structures, see Accessory Structures Fact Sheet (R-40) on the last page. For all development standards for any building type or accessory structure, see Section 4.4.10 of the zoning ordinance.	

R-40 Residential Zone


The intent of the R-40 zone is to provide designated areas of the County for moderate density residential uses. The predominant use is residential in a duplex or detached house. A limited number of other building types may be allowed under the optional method of development.

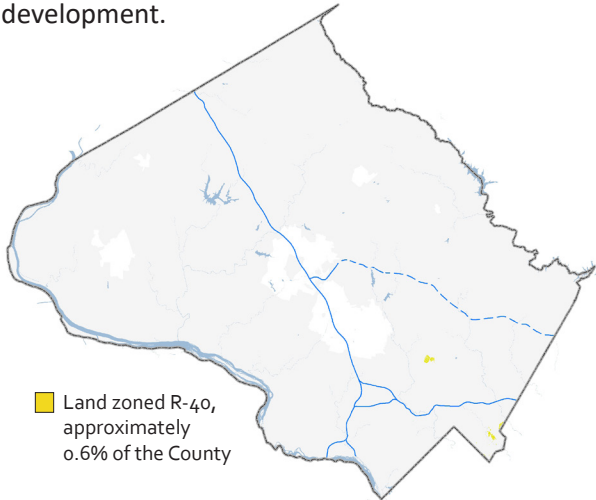

Existing duplex development in the R-40 zone

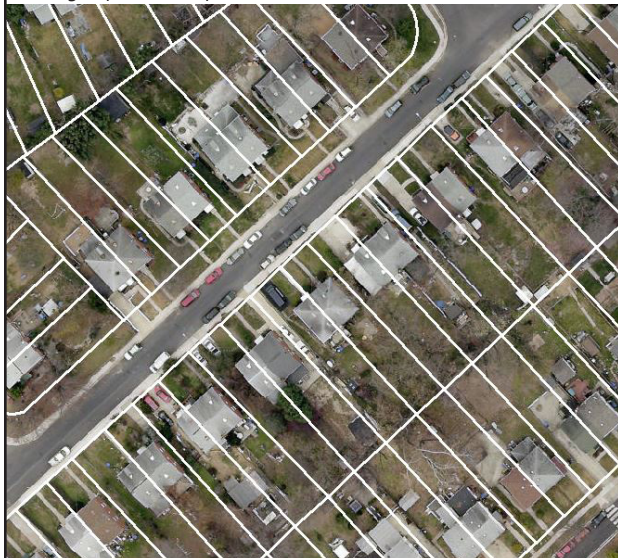


Illustrative Depiction of Standards for Duplex House Building Type

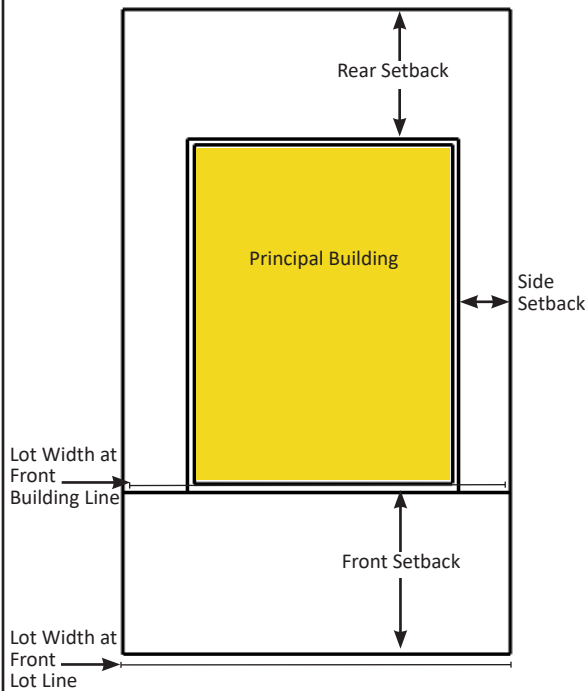

Side Section of Structure (Principal Building)

Height is measured from the average grade to the mean height level between eaves and ridge of a gable, hip, mansard, or gambrel roof or to the highest point of roof surface of a flat roof.

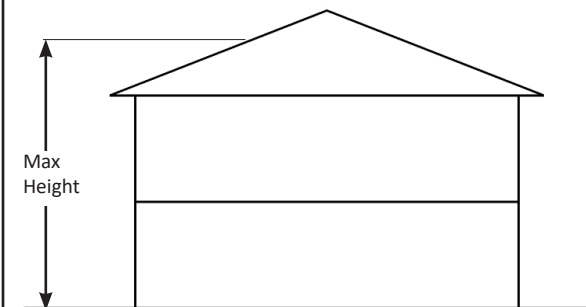

Standard Method of Development for Duplex (side-by-side) House Building Type

A. Lot	R-40
Site Area (min)	8,000 sf
Lot Area (min)	4,000 sf
Lot Width (min)	
At front building line	40'
At front lot line	10'
Density (max)	
Density (units/acre)	10.89 u/a
B. Placement	
Principal Building (min)	
Front setback	25'^^
Side street setback, abutting lot fronts on the side street and is in a Residential Detached zone	25'^^
Side street setback, abutting lot does not front on the side street or is not in a Residential Detached zone	15'
Side setback	10'
Sum of side setbacks	n/a
Rear setback	20'
Coverage (max)	
All roofed buildings and structures (including accessory structures)	40%*
C. Height	
Principal Building (max)	
Measured to highest point of a flat roof	35'***
Measured to mean height between eaves and ridge of a gable, hip, mansard, or gambrel roof	35'***
^ Subject to Established Building Line	
* Residential Infill Compatibility standards apply	
** 40' if approved by Planning Board through site plan	
Accessory Structures	
For development standards regarding accessory structures, see Accessory Structures Fact Sheet (R-40) on the next page. For all development standards for any building type or accessory structure, see Section 4.4.10 of the zoning ordinance.	

Accessory Structures: R-40

An accessory structure is a structure, including a building, that is subordinate to and located on the same lot as a principal building, the use of which is incidental to the use of the principal building or to the use of the land. In the Residential Detached zones, the maximum footprint of an accessory building on a lot where the main building is a detached house is 50% of the footprint of the main building or 600 square feet, whichever is greater. Buildings for an agricultural use are exempt from this size restriction.



Standard Method of Development for All Building Types

A. Placement	R-40
Detached Accessory Structure (min)	
Front setback	60 [^]
Side street setback, abutting lot fronts on the side street and is in a Residential Detached zone	25'
Side street setback, abutting lot does not front on the side street or is not in a Residential Detached zone	15'
Side setback	5'
Rear setback, on a corner lot where abutting lot fronts on the side street and is in a Residential Detached zone	10'
Rear setback, if not otherwise addressed	5'
B. Height	
Detached Accessory Structure (max)	
Overall building height	20'

[^] In addition to the front setback minimum, any accessory structure must be located behind the rear building line of the principal building.

Other Dimensional Standards

For an overview of development standards regarding principal buildings, including density, lot size and coverage, see the R-40 Zoning fact sheets on the previous pages. For all development standards for any building type or accessory structure, see Section 4.4.10 of the zoning ordinance.