



## HISTORIC PRESERVATION COMMISSION

**Marc Elrich**  
*County Executive*

**Karen Burditt**  
*Chair*

Date: June 2, 2025

### **MEMORANDUM**

TO: Rabbiah Sabbakhan  
Department of Permitting Services

FROM: Devon Murtha  
Historic Preservation Section  
Maryland-National Capital Park & Planning Commission Historic

SUBJECT: Area Work Permit #1119906 –Solar Panel Installation

---

The Montgomery County Historic Preservation Commission (HPC) has reviewed the attached application for a Historic Area Work Permit (HAWP). This application was **Approved** by HPC staff.

The HPC staff has reviewed and stamped the attached submission materials.

THE BUILDING PERMIT FOR THIS PROJECT SHALL BE ISSUED CONDITIONAL UPON ADHERENCE TO THE ABOVE APPROVED HAWP CONDITIONS AND MAY REQUIRE APPROVAL BY DPS OR ANOTHER LOCAL OFFICE BEFORE WORK CAN BEGIN.

Applicant: Todd Dorrien (Victory Housing); Mark Ballentine (agent).  
Address: 7051 Carroll Avenue, Takoma Park, MD 20912

This HAWP approval is subject to the general condition that the applicant will obtain all other applicable Montgomery County or local government agency permits. After the issuance of these permits, the applicant must contact this Historic Preservation Office if any changes to the approved plan are made. Once work is complete, the applicant will contact Devon Murtha at 301-495-1328 or [devon.murtha@montgomeryplanning.org](mailto:devon.murtha@montgomeryplanning.org) to schedule a follow-up site visit.





## HISTORIC PRESERVATION COMMISSION

HAWP #: \_\_\_\_\_ at: \_\_\_\_\_

submitted on: \_\_\_\_\_

has been reviewed and determined that the proposal fits into the following category/categories:

Repair or replacement of a masonry foundation with new masonry materials that closely match the original in appearance;

Installation of vents or venting pipes in locations not visible from the public right-of-way;

New gutters and downspouts;

Removal of vinyl, aluminum, asbestos, or other artificial siding when the original siding is to be repaired and/or replaced in kind;

Removal of accessory buildings that are not original to the site or non-historic construction;

Repair or replacement of missing or deteriorated architectural details such as trim or other millwork, stairs or stoops, porch decking or ceilings, columns, railings, balusters, brackets shutters, etc., with new materials that match the old in design, texture, visual characteristics, and, where possible materials, so long as the applicant is able to provide one extant example, photographic evidence, or physical evidence that serves as the basis for the work proposed;

Construction of wooden decks that are at the rear of a structure and are not visible from a public right-of-way;

Roof replacement with -compatible roofing materials, or with architectural shingles replacing 3-Tab asphalt shingles;

Installation of storm windows or doors that are compatible with the historic resource or district;

Repair, replacement or installation of foundation-level doors, windows, window wells, and areaways, or foundation vents, venting pipes, or exterior grills that do not alter the character-defining features and/or the historic character of the resource;

Construction of fences that are compatible with the historic site or district in material, height, location, and design;

Fence is lower than 48" in front of rear wall plane;

Construction of walkways, parking pads, patios, driveways, or other paved areas that are not visible from a public right-of-way and measure no more than 150 square feet in size;

Replacement of existing walkways, parking pads, patios, driveways, or other paved areas with materials that are compatible with the visual character of the historic site and district and that are no greater than the dimensions of the existing hardscape;

Construction of small accessory buildings no larger than 250 square feet in size that are not visible from the public right-of-way;

Installations of skylights on the rear of a structure that will not be visible from the public right-of-way, and would not remove or alter character-defining roof materials;

Installation of solar panels and arrays in locations that are not readily visible from the public right-of-way or that are designed so as to have a minimal impact on the historic resource or the historic district (e.g., systems that are ground-mounted in areas other than the front or side yard of a corner lot, located on accessory or outbuildings, on non-historic additions, or on rear facing roof planes);

Installation of car charging stations in any location on a property or in the right-of-way;

Installation of satellite dishes;

Removal of trees greater than 6" in diameter (d.b.h.) that are dead, dying, or present an immediate hazard.

Removal of trees greater than 6" in diameter (d.b.h.) in the rear of the property that will not impact the overall tree canopy of the surrounding district or historic site;

Replacement tree required as a condition; and,

Other minor alterations that may be required by the Department of Permitting Services post-Commission approval that would have no material effect on the historic character of the property.

Staff finds the proposal complies with Chapter 24A, the Secretary of the Interior's Standards for Rehabilitation, and any additional requisite guidance. Under the authority of COMCOR No. 24A.04.01, this HAWP is approved by \_\_\_\_\_ on \_\_\_\_\_. The approval memo and stamped drawings follow.



FOR STAFF ONLY: **HAWP**  
HAWP# \_\_\_\_\_ #1119906  
DATE ASSIGNED \_\_\_\_\_

# APPLICATION FOR HISTORIC AREA WORK PERMIT

HISTORIC PRESERVATION COMMISSION  
301.563.3400

**APPLICANT:** Approval for 7051 Carroll Avenue, not 7501 Carroll Avenue

Name: \_\_\_\_\_ E-mail: \_\_\_\_\_

Address: \_\_\_\_\_ City: \_\_\_\_\_ Zip: \_\_\_\_\_

Daytime Phone: \_\_\_\_\_ Tax Account No.: \_\_\_\_\_

**AGENT/CONTACT (if applicable):**

Name: \_\_\_\_\_ E-mail: \_\_\_\_\_

Address: \_\_\_\_\_ City: \_\_\_\_\_ Zip: \_\_\_\_\_

Daytime Phone: \_\_\_\_\_ Contractor Registration No.: \_\_\_\_\_

**LOCATION OF BUILDING/PREMISE:** MIHP # of Historic Property \_\_\_\_\_

Is the Property Located within an Historic District? ☐ Yes/District Name \_\_\_\_\_

☐ No/Individual Site Name \_\_\_\_\_

Is there an Historic Preservation/Land Trust/Environmental Easement on the Property? If YES, include a map of the easement, and documentation from the Easement Holder supporting this application.

Are other Planning and/or Hearing Examiner Approvals /Reviews Required as part of this Application? (Conditional Use, Variance, Record Plat, etc.?) If YES, include information on these reviews as supplemental information.

Building Number: \_\_\_\_\_ Street: \_\_\_\_\_

Town/City: \_\_\_\_\_ Nearest Cross Street: \_\_\_\_\_

Lot: \_\_\_\_\_ Block: \_\_\_\_\_ Subdivision: \_\_\_\_\_ Parcel: \_\_\_\_\_

**TYPE OF WORK PROPOSED: See the checklist on Page 4 to verify that all required documents for proposed work are submitted with this application. Income tax returns must be accepted for review. Check all that apply:**

- |   |  |                          |
|---|--|--------------------------|
| <input type="checkbox"/> New Construction   | <input type="checkbox"/> Deck/Porch          | <input type="checkbox"/> |
| <input type="checkbox"/> Addition           | <input type="checkbox"/> Fence               | <input type="checkbox"/> |
| <input type="checkbox"/> Demolition         | <input type="checkbox"/> Hardscape/Landscape | <input type="checkbox"/> |
| <input type="checkbox"/> Grading/Excavation | <input type="checkbox"/> Roof                | <input type="checkbox"/> |

I hereby certify that I have the authority to make the foregoing application and that the construction will comply with plans reviewed and approved by all necessary agencies and hereby acknowledge and accept this to be a condition for the issuance of this permit.

Signature of owner or authorized agent



**REVIEWED**

By Devon.Murtha at 12:52 pm, Jun 02, 2025

**HAWP APPLICATION: MAILING ADDRESSES FOR NOTIFYING**  
[Owner, Owner's Agent, Adjacent and Confronting Property Owners]

**Owner's mailing address**

**Owner's Agent's mailing address**

**Adjacent and confronting Property Owners mailing addresses**



**Description of Property:** Please describe the building and surrounding environment. Include information on significant structures, landscape features, or other significant features of the property:

**Description of Work Proposed:** Please give an overview of the work to be undertaken:



**REVIEWED**

*By Devon.Murtha at 12:49 pm, Jun 02, 2025*

Work Item 1: \_\_\_\_\_

Description of Current Condition:

Proposed Work:

Work Item 2: \_\_\_\_\_

Description of Current Condition:

Proposed Work:

Work Item 3: \_\_\_\_\_

Description of Current Condition:

Proposed Work:

APPROVED

Montgomery County

Historic Preservation Commission

Karen Bunkle

APPROVED

Montgomery County

Historic Preservation Commission

Karen Bunkle

APPROVED

Montgomery County

Historic Preservation Commission

Karen Bunkle

APPROVED

Montgomery County

Historic Preservation Commission

Karen Bunkle

**REVIEWED**  
By Devon.Murtha at 12:49 pm, Jun 02, 2025

**REVIEWED**  
By Devon.Murtha at 12:49 pm, Jun 02, 2025

# HISTORIC AREA WORK PERMIT CHECKLIST OF APPLICATION REQUIREMENTS

	Required Attachments						
Proposed Work	I. Written Description	2. Site Plan	3. Plans/Elevations	4. Material Specifications	5. Photographs	6. Tree Survey	7. Property Owner Addresses
New Construction	*	*	*	*	*	*	*
Additions/Alterations	*	*	*	*	*	*	*
Demolition	*	*	*		*		*
Deck/Porch	*	*	*	*	*	*	*
Fence/Wall	*	*	*	*	*	*	*
Driveway/Parking Area	*	*		*	*	*	*
Grading/Excavation/Landscaping	*	*		*	*	*	*
Tree Removal	*	*		*	*	*	*
Siding/ Roof Changes	*	*	*	*	*		*
Window/Door Changes	*	*	*	*	*		*
Masonry Repair/Repoint	*	*	*	*	*		*
Signs	*	*	*	*	*		*



**REVIEWED**  
By Devon.Murtha at 12:49 pm, Jun 02, 2025



GENERAL NOTES	
2.1.1	<u>SITE NOTES:</u>
2.1.2	A LADDER WILL BE IN PLACE FOR INSPECTION IN COMPLIANCE WITH OSHA REGULATIONS.
2.1.3	THE PV MODULES ARE CONSIDERED NON-COMBUSTIBLE AND THIS SYSTEM IS A UTILITY INTERACTIVE SYSTEM WITH STORAGE BATTERIES.
2.1.4	THE SOLAR PV INSTALLATION WILL NOT OBSTRUCT ANY PLUMBING, MECHANICAL, OR BUILDING ROOF VENTS.
2.1.5	PROPER ACCESS AND WORKING CLEARANCE AROUND EXISTING AND PROPOSED ELECTRICAL EQUIPMENT WILL BE PROVIDED AS PER SECTION NEC 110.26.
2.1.6	ROOF COVERINGS SHALL BE DESIGNED, INSTALLED, AND MAINTAINED IN ACCORDANCE WITH THIS CODE AND THE APPROVED MANUFACTURER'S INSTRUCTIONS SUCH THAT THE ROOF COVERING SERVES TO PROTECT THE BUILDING OR STRUCTURE.
2.2.1	<u>EQUIPMENT LOCATIONS</u>
2.2.2	ALL EQUIPMENT SHALL MEET MINIMUM SETBACKS AS REQUIRED BY NEC 110.26.
2.2.3	WIRING SYSTEMS INSTALLED IN DIRECT SUNLIGHT MUST BE RATED FOR EXPECTED OPERATING TEMPERATURE AS SPECIFIED BY NEC 690.31 (A)(1) AND NEC TABLE 310.15 (B)(2)(A).
2.2.4	JUNCTION AND PULL BOXES PERMITTED INSTALLED UNDER PV MODULES ACCORDING TO NEC 690.34.
2.2.5	ADDITIONAL AC DISCONNECT(S) SHALL BE PROVIDED WHERE THE INVERTER IS NOT WITHIN SIGHT OF THE AC SERVING DISCONNECT.
2.2.6	ALL EQUIPMENT SHALL BE INSTALLED ACCESSIBLE TO QUALIFIED PERSONNEL ACCORDING TO NEC APPLICABLE CODES.
2.2.7	ALL COMPONENTS ARE LISTED FOR THEIR PURPOSE AND RATED FOR OUTDOOR USAGE WHEN APPROPRIATE.
2.3.1	<u>STRUCTURAL NOTES:</u>
2.3.2	RACKING SYSTEM & PV ARRAY WILL BE INSTALLED ACCORDING TO CODE-COMPLIANT INSTALLATION MANUAL. TOP CLAMPS REQUIRE A DESIGNATED SPACE BETWEEN MODULES, AND RAILS MUST ALSO EXTEND A MINIMUM DISTANCE BEYOND EITHER EDGE OF THE ARRAY/SUBARRAY, ACCORDING TO RAIL MANUFACTURER'S INSTRUCTIONS.
2.3.3	JUNCTION BOX WILL BE INSTALLED PER MANUFACTURERS' SPECIFICATIONS. IF ROOF-PENETRATING TYPE, IT SHALL BE FLASHED & SEALED PER LOCAL REQUIREMENTS.
2.3.4	ROOFTOP PENETRATIONS FOR PV RACEWAY WILL BE COMPLETED AND SEALED W/ APPROVED CHEMICAL SEALANT PER CODE BY A LICENSED CONTRACTOR.
2.3.5	ALL PV RELATED ROOF ATTACHMENTS TO BE SPACED NO GREATER THAN THE SPAN DISTANCE SPECIFIED BY THE RACKING MANUFACTURER.
2.3.6	WHEN POSSIBLE, ALL PV RELATED RACKING ATTACHMENTS WILL BE STAGGERED AMONGST THE ROOF FRAMING MEMBERS.
2.4.1	<u>GROUNDING NOTES:</u>
2.4.2	GROUNDING SYSTEM COMPONENTS SHALL BE LISTED FOR THEIR PURPOSE, AND GROUNDING DEVICES EXPOSED TO THE ELEMENTS SHALL BE RATED FOR SUCH USE.
2.4.3	PV SYSTEMS REQUIRE AN EQUIPMENT GROUNDING CONDUCTOR. ALL METAL ELECTRICAL EQUIPMENT AND STRUCTURAL COMPONENTS BONDED TO GROUND, IN ACCORDANCE WITH 250.134 OR 250.136(A). ONLY THE DC CONDUCTORS ARE UNGROUNDED.
2.4.4	PV EQUIPMENT SHALL BE GROUNDED ACCORDING TO NEC 690.43 AND MINIMUM NEC TABLE 250.122.
2.4.5	METAL PARTS OF MODULE FRAMES, MODULE RACKING, AND ENCLOSURE CONSIDERED GROUNDED IN ACCORD WITH 250.134 AND 250.136(A).
2.4.6	EACH MODULE WILL BE GROUNDED USING WEBB GROUNDING CLIPS AS SHOWN IN MANUFACTURER DOCUMENTATION AND APPROVED BY THE AHJ. IF WEBBS ARE NOT USED, MODULE GROUNDING LUGS MUST BE INSTALLED AT THE SPECIFIED GROUNDING LUG HOLES PER THE MANUFACTURERS' INSTALLATION REQUIREMENTS.
2.4.7	THE GROUNDING CONNECTION TO A MODULE SHALL BE ARRANGED SUCH THAT THE REMOVAL OF A MODULE DOES NOT INTERRUPT A GROUNDING CONDUCTOR TO ANOTHER MODULE.
2.4.8	GROUNDING AND BONDING CONDUCTORS, IF INSULATED, SHALL BE COLORED GREEN OR MARKED GREEN IF #4 AWG OR LARGER [NEC 250.119]
2.4.9	THE GROUNDING ELECTRODE SYSTEM COMPLIES WITH NEC 690.47 AND NEC 250.50 THROUGH 250.106. IF EXISTING SYSTEM IS INACCESSIBLE, OR INADEQUATE, A GROUNDING ELECTRODE SYSTEM PROVIDED ACCORDING TO NEC 250, NEC 690.47 AND AHJ.
2.4.10	DC PV ARRAYS SHALL BE PROVIDED WITH DC GROUND-FAULT PROTECTION MEETING THE REQUIREMENTS OF 690.41(B)(1) AND (2) TO REDUCE FIRE HAZARDS
2.5.1	<u>INTERCONNECTION NOTES:</u>
2.5.2	LOAD-SIDE INTERCONNECTION SHALL BE IN ACCORDANCE WITH [NEC 705.12(B)]
2.5.3	THE SUM OF 125 PERCENT OF THE POWER SOURCE(S) OUTPUT CIRCUIT CURRENT AND THE RATING OF THE OVERCURRENT DEVICE PROTECTING THE BUSBAR SHALL NOT EXCEED 120 PERCENT OF THE AMPACITY OF THE BUSBAR, PV DEDICATED BACKFEED BREAKERS MUST BE LOCATED OPPOSITE END OF THE BUS FROM THE UTILITY SOURCE OCPD [NEC 705.12(B)(2)(3)].
2.5.4	AT MULTIPLE ELECTRIC POWER SOURCES OUTPUT COMBINER PANEL, TOTAL RATING OF ALL OVERCURRENT DEVICES SHALL NOT EXCEED AMPACITY OF BUSBAR. HOWEVER, THE COMBINED OVERCURRENT DEVICE MAY BE EXCLUDED ACCORDING TO NEC 705.12 (B)(2)(3)(C).
2.5.5	FEEDER TAP INTERCONNECTION (LOAD SIDE) ACCORDING TO NEC 705.12 (B)(2)(1)
2.5.6	SUPPLY SIDE TAP INTERCONNECTION ACCORDING TO NEC 705.12 (A) WITH SERVICE ENTRANCE CONDUCTORS IN ACCORDANCE WITH NEC 230.42
2.5.7	BACKFEEDING BREAKER FOR ELECTRIC POWER SOURCES OUTPUT IS EXEMPT FROM ADDITIONAL FASTENING [NEC 705.12 (B)(5)].
2.6.1	<u>DISCONNECTION AND OVER-CURRENT PROTECTION NOTES:</u>
2.6.2	DISCONNECTING SWITCHES SHALL BE WIRED SUCH THAT WHEN THE SWITCH IS OPENED THE CONDUCTORS REMAINING ENERGIZED ARE CONNECTED TO THE TERMINALS MARKED "LINE SIDE" (TYPICALLY THE UPPER TERMINALS).
2.6.3	DISCONNECTS TO BE ACCESSIBLE TO QUALIFIED UTILITY PERSONNEL, BE LOCKABLE, AND BE A VISIBLE-BREAK SWITCH.
2.6.4	BOTH POSITIVE AND NEGATIVE PV CONDUCTORS ARE UNGROUNDED. THEREFORE BOTH MUST OPEN WHERE A DISCONNECT IS REQUIRED, ACCORDING TO NEC 690.13.
2.6.5	ISOLATING DEVICES OR EQUIPMENT DISCONNECTING MEANS SHALL BE INSTALLED IN CIRCUITS CONNECTED TO EQUIPMENT AT A LOCATION WITHIN THE EQUIPMENT, OR WITHIN SIGHT AND WITHIN 10 FT. OF THE EQUIPMENT. AN EQUIPMENT DISCONNECTING MEANS SHALL BE PERMITTED TO BE REMOTE FROM THE EQUIPMENT WHERE THE EQUIPMENT DISCONNECTING MEANS CAN BE REMOTELY OPERATED FROM WITHIN 10 FT. OF THE EQUIPMENT, ACCORDING TO NEC 690.15 (A).
2.6.6	PV SYSTEM CIRCUITS INSTALLED ON OR IN BUILDINGS SHALL INCLUDE A RAPID SHUTDOWN FUNCTION TO REDUCE SHOCK HAZARD FOR EMERGENCY RESPONDERS IN ACCORDANCE WITH 690.12(A) THROUGH (D)
2.6.7	ALL OCPD RATINGS AND TYPES SPECIFIED ACCORDING TO NEC 690.8, 690.9, AND 240.
2.6.8	BOTH POSITIVE AND NEGATIVE PV CONDUCTORS ARE UNGROUNDED, THEREFORE BOTH REQUIRE OVER-CURRENT PROTECTION, ACCORDING TO NEC 240.21. (SEE EXCEPTION IN NEC 690.9)
2.6.9	IF REQUIRED BY AHJ, SYSTEM WILL INCLUDE ARC-FAULT CIRCUIT PROTECTION ACCORDING TO NEC 690.11 AND UL1699B.
2.7.1	<u>WIRING &amp; CONDUIT NOTES:</u>
2.7.2	ALL CONDUIT AND WIRE WILL BE LISTED AND APPROVED FOR THEIR PURPOSE. CONDUIT AND WIRE SPECIFICATIONS ARE BASED ON MINIMUM CODE REQUIREMENTS AND ARE NOT MEANT TO LIMIT UP-SIZING.
2.7.3	ALL CONDUCTORS SIZED ACCORDING TO NEC 690.8, NEC 690.7.
2.7.4	EXPOSED PV SOURCE CIRCUITS AND OUTPUT CIRCUITS SHALL USE WIRE LISTED AND IDENTIFIED AS PHOTOVOLTAIC (PV) WIRE [690.31 (C)]. PV MODULES WIRE LEADS SHALL BE LISTED FOR USE ON PV ARRAYS, ACCORDING TO NEC 690.31 (A).
2.7.5	PV WIRE BLACK WIRE MAY BE FIELD-MARKED WHITE [NEC 200.6 (A)(6)].
2.7.6	MODULE WIRING SHALL BE LOCATED AND SECURED UNDER THE ARRAY.
2.7.7	ACCORDING TO NEC 200.7, UNGROUNDED SYSTEMS DC CONDUCTORS COLORED OR MARKED AS FOLLOWS:
2.7.8	DC POSITIVE- RED, OR OTHER COLOR EXCLUDING WHITE, GRAY AND GREEN
	DC NEGATIVE- BLACK, OR OTHER COLOR EXCLUDING WHITE, GRAY AND GREEN
	AC CONDUCTORS COLORED OR MARKED AS FOLLOWS:
	PHASE A OR L1- BLACK
	PHASE B OR L2- RED, OR OTHER CONVENTION IF THREE PHASE
	PHASE C OR L3- BLUE, YELLOW, ORANGE*, OR OTHER CONVENTION
	NEUTRAL- WHITE OR GRAY
	IN 4-WIRE DELTA CONNECTED SYSTEMS THE PHASE WITH HIGHER VOLTAGE TO BE MARKED ORANGE [NEC 110.15].

**SYMBOL LEGEND**

E	MAIN ENTRANCE DOOR	CBR	COMBINER BOX	(E)	UTILITY METER	FENCE	
MEP	MAIN ELECTRICAL PANEL	TW	TAP BOX	V	PV REVENUE METER	PROPERTY LINE	
JB	JUNCTION BOX	SUB	SUB (AC) PANEL	U	UTILITY POLE	SETBACK	
S	AC DISCONNECT	MM	METERMAN	A	MODULE STRINGING	ROOF RAFTERS	
INV	DC/AC INVERTER	NSD	RAPID SHUTDOWN	B	MODULE STRINGING	MODULE STRINGING	
DCSW	DC DISCONNECT	CCB	(DC) COMBINER BOX	C	MODULE STRINGING	EQUIPMENT GROUND	
PBL	AC PANELBOARD			D	MODULE STRINGING	CONDUIT	
						FIRE CLEARANCE	

**DETAIL INDICATOR**

**ELEVATION INDICATOR**

DISCLAIMER: PLEASE NOTE THAT THE ABBREVIATIONS, ANNOTATIONS, AND SYMBOLS LISTED ARE INTENDED TO ILLUSTRATE THOSE THAT ARE COMMONLY USED. NOT ALL ARE NECESSARILY UTILIZED WITHIN THIS SET OF DRAWINGS.

IN 4-WIRE DELTA CONNECTED SYSTEMS THE PHASE WITH HIGHER VOLTAGE TO BE MARKED ORANGE [NEC 110.15].

An aerial photograph of a large, multi-story building with a flat roof. The roof is covered with various pieces of equipment, including HVAC units, pipes, and structural elements. The building is surrounded by green trees and a paved area. The image is oriented horizontally on the page.


NOT TO SCALE




NOT TO SCALE

By Devon.Murtha at 12:49 pm, Jun 02, 2025







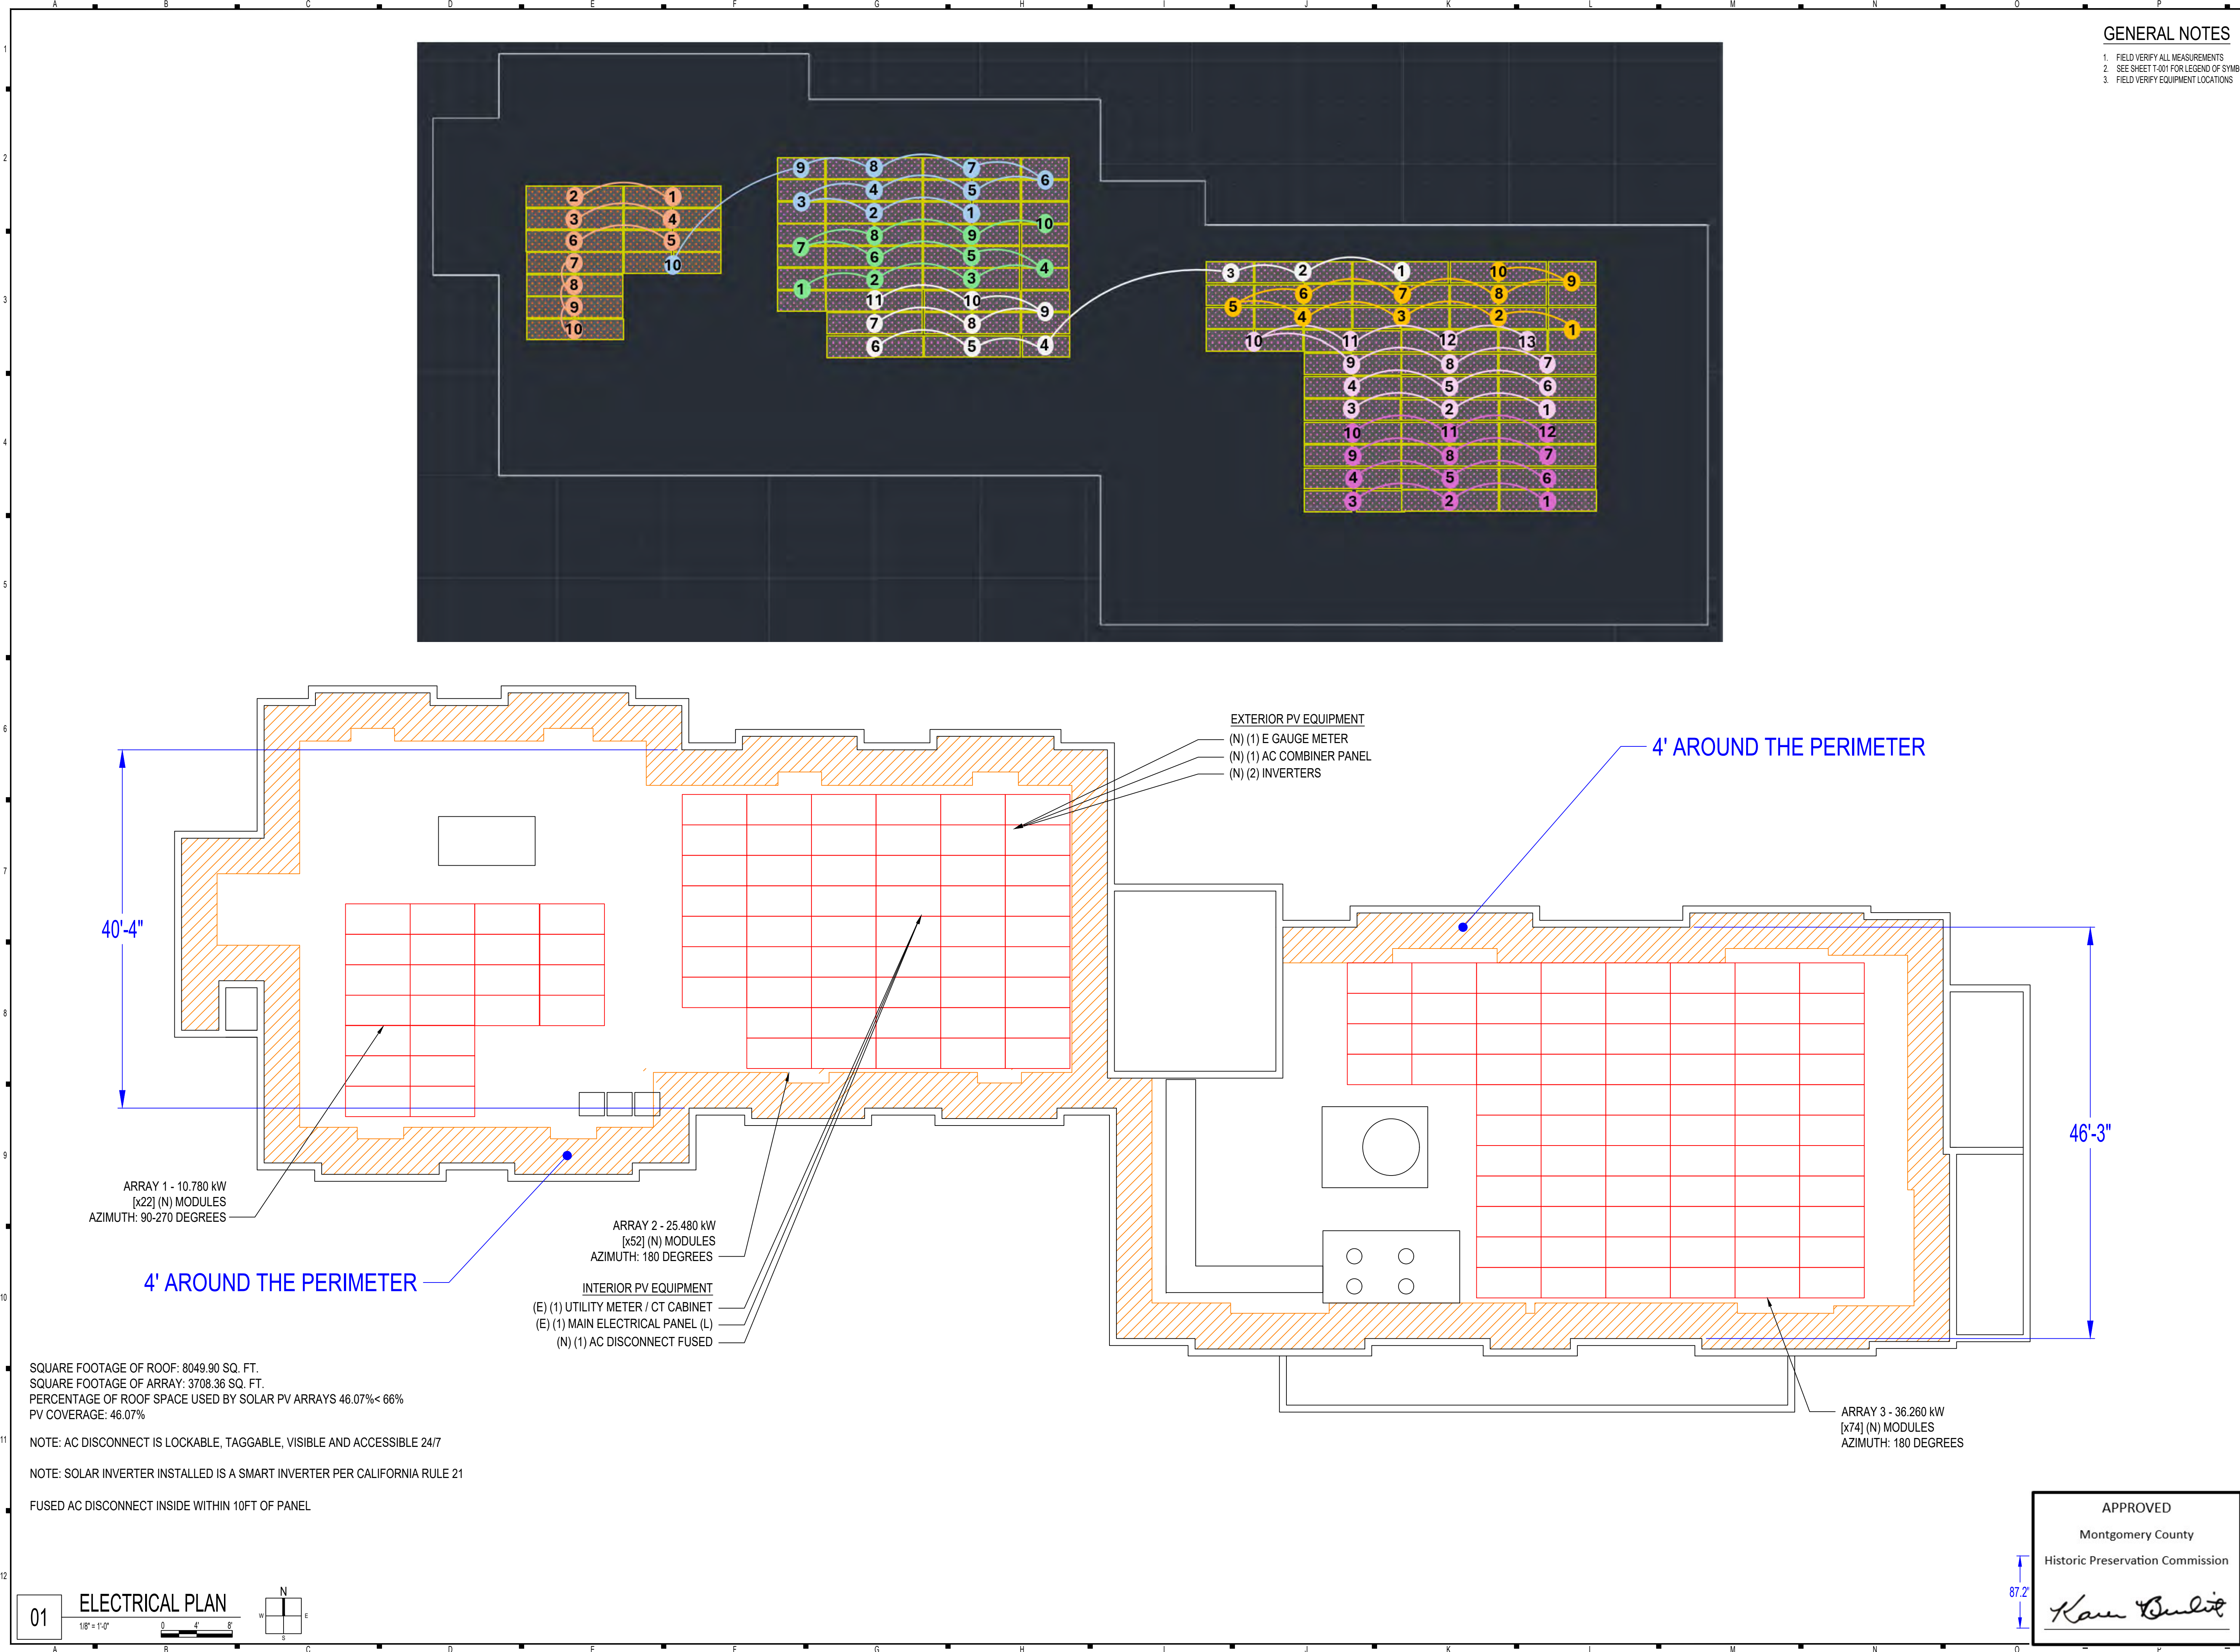

**UNIVERSAL RENEWABLES**  
ELEVATING SOLAR

**CONTRACTOR**

UNIVERSAL RENEWABLES

ADDRESS: 3516 MASSACHUSETTS AVE NW WASHINGTON, DC 20007

PHONE: 202.956.8565

LIC. NO.: 41051900079

**REVISION / RELEASE**

NO.	DESCRIPTION	DATE

**PROJECT**

NEW PV SYSTEM: 72.520 kWp

**VICTORY TOWER**

7051 CARROLL AVENUE, TAKOMA PARK, MD 20912

APN: 01072074

**ENGINEER OF RECORD**

Digitally signed by Methode Maniraguha  
Date: 2024.12.10 01:31:41 +05'30'

**Professional Certification:** I hereby certify that these documents were prepared or approved by me, and that I am a duly licensed professional engineer under the laws of the State of Maryland:  
License No. 52692  
Expiration Date: 05/24/2026

PAPER SIZE: 36" x 24" (ARCH D)

SHEET TITLE: ELECTRICAL PLAN

DATE: 11.07.2024  
DESIGN BY: V.G.  
CHECKED BY: M.M.  
SHEET NUMBER:

**APPROVED**

Montgomery County  
Historic Preservation Commission

*Kare Buelit*

**87.2'**

**01**

**ELECTRICAL PLAN**

1/8" = 1'-0"

N



W

E

S

**REVIEWED** A-102  
By Devon.Murtha at 12:49 pm, Jun 02, 2025



MECHANICAL SPECIFICATIONS																		
Format	87.2x26 x 41.1mm x 1.38mm (including frame)																	
Weight	64.57kg (291.1lb)																	
Front Cover	0.52mm (0.021mm) thermal stress-dressed glass with anti-reflection technology																	
Back Cover	0.52mm (0.021mm) anti-tempered glass																	
Frame	Anodized Aluminum																	
Cell	6 x 1.56 monocrystalline G1 AUNTLAR solar half cells																	
Junction Box	200W 3.0A/5V x 1.26 x 7.6mm x 0.5mm (0.7")																	
Dimensions	330.3mm x 250.4mm x 15.8mm (PT) with topological texture																	
Cable	4mm <sup>2</sup> (AWG14) insulated (UL1741) PV cables (10m)																	
Connector	SMA4 Pin, MC4, Snap-Off MC4-Evo2, Tinning G1 Cables (UL448, IP68)																	
																		
ELECTRICAL CHARACTERISTICS																		
POWER CLASS	475		490		485		490		485									
MINIMUM PERFORMANCE AT STANDARD TEST CONDITIONS (STC) (STC=1000W/m <sup>2</sup> , POWER IRRADIANCE=1000W/m <sup>2</sup> , T <sub>AMBIENT</sub> =25°C)																		
Power at MPPT	P <sub>max</sub> (W)	475	505.62	480	528.0	485	530.3	490	526.63	510.17								
Short Circuit Current	I <sub>sc</sub> (A)	11.98	12.22	11.12	12.17	11.16	12.21	11.10	12.26	11.26								
Open Circuit Voltage	V <sub>oc</sub> (V)	62.18	63.84	53.59	58.98	53.63	58.92	53.86	58.94	54.06								
Current at MPPT	I <sub>mp</sub> (A)	6.08	6.16	5.68	6.03	6.18	6.03	6.14	6.07	6.14								
Voltage at MPPT	V <sub>mp</sub> (V)	45.03	45.20	45.25	46.32	46.32	46.63	46.33	46.52	46.52								
Efficiency of Panel	η (%)	22.9	22.9	22.9	22.9	22.9	22.9	22.9	22.9	22.9								
Efficiency of PV array	η (%)	70% ± 0.5% Efficiency gain per year based on radiation up to STC (1000W/m <sup>2</sup> )	According to IEC 61215-2															
*Maximum temperature rise at 1000W/m <sup>2</sup> STC (1000W/m <sup>2</sup> ) is 31.25°C at STC (1000W/m <sup>2</sup> ) per IEC 61215-2 (31.25°C) at 1000W/m <sup>2</sup> STC (1000W/m <sup>2</sup> )																		
*Maximum temperature rise at 1000W/m <sup>2</sup> STC (1000W/m <sup>2</sup> ) is 31.25°C at 1000W/m <sup>2</sup> STC (1000W/m <sup>2</sup> ) per IEC 61215-2 (31.25°C) at 1000W/m <sup>2</sup> STC (1000W/m <sup>2</sup> )																		
Power at MPPT	P <sub>max</sub> (W)	3676	3681.4	3661.3	3661.9	3661.9	3661.9	3661.9	3661.9	3661.9								
Short Circuit Current	I <sub>sc</sub> (A)	8.92	8.96	8.96	8.99	8.99	8.99	8.99	8.99	8.99								
Open Circuit Voltage	V <sub>oc</sub> (V)	60.27	60.41	60.41	60.47	60.47	60.47	60.47	60.47	60.47								
Current at MPPT	I <sub>mp</sub> (A)	8.90	8.94	8.94	8.97	8.97	8.97	8.97	8.97	8.97								
Voltage at MPPT	V <sub>mp</sub> (V)	43.06	43.26	43.26	43.63	43.63	43.62	43.62	43.62	43.62								
*QWELL M602, spectrum AM1.5																		
QUALITY FACTOR PERFORMANCE																		
																		
At least 87% of nominal power during 10 years, Temperature rise, 0.6°C/degree per year, At least 86.8% of nominal power at 50°C, At least 86.8% of nominal power at 50°C, At least 86.8% of nominal power at 50°C, At																		

Three Phase Inverter with Synergy Technology					
For the 208V Grid for North America					
SE43.2KUS / SE50KUS					
Applicable to inverter with Part Numbers	SE43.2KUS	SE50K-US210000	SE50KUS		
<b>OUTPUT</b>					
Rated AC Active Output Power	41000		50000		W
Maximum AC Apparent Output Power	44000		55000		VA
AC Output Line Connection	3Ø + PE, 4Ø + PE				
Supports AGS	WYE, 120V, 144V, 170V, 208V, 240V, 277V, 480V, IT				
AC Output Voltage Minimum Nominal Maximum <sup>(1)</sup> (V, Hz)	50/50-51.5				
AC Output Voltage Minimum Nominal Maximum <sup>(2)</sup> (V, Hz)	100/100-102				
AC Frequency Min-Max (Hz)	50/5 - 60/5 - 60/5				
Maximum Continuous Output Current per Phase (A)	150		158.5		A
IGBT Protection	Yes				
Utility Monitoring, Islanding Protection, Configurable Power Factor, Country Configurable Thresholds	Yes				
Total Harmonic Distortion	± 3 %				
Power Factor Range	0.9/0.93 to 1				
<b>INPUT</b>					
Maximum DC Power (Module SCL) Inverter / String/Line	64800 / 24000		78000 / 27000		W
Transformer Isolation	Yes				
Maximum input Voltage (DC or 3Ø AC)	1500V				
Operating Voltage Range	570V - 1000V				
Maximum Input Current	3 x 40		3 x 48.5		A
Reverse Voltage Protection	Yes				
Ground Fault Isolation Detection	80VDC sensitivity per String/Unit <sup>(3)</sup>				
CEI Weighted Efficiency	97				
High-Power Power Consumption	± 12				
<b>ADDITIONAL FEATURES</b>					
Supports Communication Interfaces <sup>(4)</sup>	2 x RS485, Ethernet, Modbus, IEC 61850, Cellular (optional)				
Smart Energy Management	Export to Battery				
Energy Consumption	With the Synergy module applications using built-in 40V Fuses point for local connection				
AC Fault Protection	Built-in 40V Configuration (According to IEC 61850)				
Photovoltaic Rapid Shutdown System	NEC 2014, 2017 and 2020 (built-in)				
PE Breaker	Negative/Positive				
IP65 Surge Protection (ports 1-2)	Type 1, 6kV non-isolated, integrated				
AC DC Surge Protection	Type 1, 6kV non-isolated, integrated				
DC Fuses (Single-Port)	25A, Integrated				
<b>DC SAFETY SWITCH</b>					
DC Switch	Built-in				
<b>STANDARD COMPLIANCE</b>					
Safety	UL 1973B, CSA 22.2, IEC 62109-1, Canadian IEC 62109-1 (11), M-07				
Grid Connection Standards	IEEE 1547, 2012 and 2013, IEC 61730-1				
Protection	IEC part 7154 class A				
IT for the required safety class and Grid Code (if support)	IT for the required safety class and Grid Code (if support)				
IT for the required safety class and Grid Code (if support)	IT for the required safety class and Grid Code (if support)				
IT for the required safety class and Grid Code (if support)	IT for the required safety class and Grid Code (if support)				
IT for the required safety class and Grid Code (if support)	IT for the required safety class and Grid Code (if support)				
IT for the required safety class and Grid Code (if support)	IT for the required safety class and Grid Code (if support)				
IT for the required safety class and Grid Code (if support)	IT for the required safety class and Grid Code (if support)				
IT for the required safety class and Grid Code (if support)	IT for the required safety class and Grid Code (if support)				
IT for the required safety class and Grid Code (if support)	IT for the required safety class and Grid Code (if support)				
IT for the required safety class and Grid Code (if support)	IT for the required safety class and Grid Code (if support)				
IT for the required safety class and Grid Code (if support)	IT for the required safety class and Grid Code (if support)				
IT for the required safety class and Grid Code (if support)	IT for the required safety class and Grid Code (if support)				
IT for the required safety class and Grid Code (if support)	IT for the required safety class and Grid Code (if support)				

<div> <div> <div>Three Phase Inverter for the 120/208V Grid<sup>(1)</sup></div> <div>For North America</div> <div>SE17.3KUS</div> </div> </div>			
MODEL NUMBER	SE17.3KUS	UNITS	
APPLICABLE TO INVERTERS WITH PART NUMBER			
OUTPUT			
Batted AC Power Output	17300	W	
Maximum apparent AC output power	17300	VA	
AC Output Line Connections	2W + 1E, 4W + 1E		
AC Output Voltage Minimum Nominal Maximum <sup>(3), (4)</sup>	105 120 132 V		
AC Output Voltage Maximum Nominal Maximum <sup>(3), (4)</sup>	183 208 229	Vac	
AC Frequency Min Max Mode <sup>(5)</sup>	50.0 60 60.5 Hz		
Continuous Output Current (per Phase)	48.25	Aac	
EDH Threshold	1	A	
Utility Monitoring, Islanding Protection, Country Configurable Set	Yes		
IP20	+	%	
Power Factor Range	+/- 0.85 to 1		
INPUT			
Maximum DC Power (Module 3K3)	30275	W	
Transformer less, Ungrounded	600		
Maximum Input Voltage DC+ to DC-	925	Vdc	
Operating Voltage Range	730 800	Vdc	
Maximum Input Current	48.25	Aac	
Maximum Input Short Circuit Current	195	Aac	
Reverse Polarity Protection	Yes		
Ground Fault Isolation Detection	16KHz Sensitivity <sup>(6)</sup>		
CEC Weighted Efficiency	97.5	%	
Night Time Power Consumption	< 4	W	
ADDITIONAL FEATURES			
Maximum Communication Interfaces	2 x RS485, Ethernet, Cellular (optional)		
Inverter Commissioning	With the SetApp mobile application to built in Wi-Fi access point for local connection		
Rapid Shutdown	NEC2014, NEC2017 and NEC2020 compliant/certified		
ES&F Surge Protection Plug-In	Supplied with the inverter. Built in		
AC DC Surge Protection	Type II, field replaceable, built in		
DC Fuses (Single Fuse)	25A, built in		
Smart Energy Management	Export Limitation		
DC SAFETY SWITCH			
DC Disconnect	Integrated		
STANDARD COMPLIANCE			
Safety	UL1741 UL1741 SA UL1698, CSA C22.2 Canadian AFCI according to T11, M 07		
UL Connection Standards	IEEE1547, Rule 21, Rule 14 (H)		
Enclosures	FCC part15 class A		
INSTALLATION SPECIFICATIONS			
AC output conduit size / JMWG range	N° 1" / 6 - 10 AWG		
DC input conduit size / AWG range	N° 1" / 6 - 10 AWG		
Number of KC inputs per phase	78.2 / 25.5		
Connections with Safety Switch (if W + E)	31.8 x 12.5 x 11.8 / 808 x 317 x 300	in / mm	
Mounting with Safety Switch	Fans (user replaceable)		
Cladding	NEMA 3R		
Noise	< 65 dBA		
Operating Temperature Range	-40 to +140 °F or to +60°		
Protection Rating	IP65		
Breaker protection	Breaker protected		

(1) For 77500000 inverter only to <https://www.silvercorp.com/Default.aspx?nav=three-phase-inverter-77-480v-output-dedicated-pk>  
(2) For the optional output voltage regulator see <https://www.silvercorp.com/Default.aspx?nav=three-phase-inverter-77-480v-output-dedicated-pk>  
(3) For the power factor information refer to <https://www.silvercorp.com/Default.aspx?nav=three-phase-inverter-77-480v-output-dedicated-pk>  
(4) For the power factor information refer to <https://www.silvercorp.com/Default.aspx?nav=three-phase-inverter-77-480v-output-dedicated-pk>  
(5) For the power factor information refer to <https://www.silvercorp.com/Default.aspx?nav=three-phase-inverter-77-480v-output-dedicated-pk>  
(6) For the power factor information refer to <https://www.silvercorp.com/Default.aspx?nav=three-phase-inverter-77-480v-output-dedicated-pk>

© Silvercorp Technologies, Inc. All Rights Reserved. Silvercorp Technologies, Inc. is a registered trademark of Silvercorp Technologies, Inc. All other trademarks mentioned herein are the property of their respective owners.

solarEdge | DESIGNER REPORT | Page 1 of 2

Site ID: 777302866588048

VICTORY TOWER, 7051 CARROLL AVENUE  
Carroll Avenue 7051, Takoma Park, Maryland, 20912, United States | Nov 9, 2024

Aerial photograph showing the Victory Tower building with a large array of solar panels installed on its flat roof. The surrounding area includes trees and other buildings.

SUMMARY OVERVIEW

149 PV modules

2 Inverters

75 Optimizers

SIMULATION RESULTS

Installed DC Power

73.01 kW<sub>p</sub>

Max Achieved AC Power

50.97 kW

Annual Solar Energy Production

90.37 MWh

Annual CO2 Emission Saved

63.89 t

Annual Equivalent Trees Planted

2,935


PV MODULES

# Module	Model	Peak power	Racking type	Orientation	Azimuth	Tilt
149	Hanwha Q Cells GmbH, Q PEAK DUO XL-G10-3 / BFG 490W (user-defined)	73 kW <sub>p</sub>			180°	0°
Total: 149		73 kW <sub>p</sub>				

BILL OF MATERIALS (BOM)

Items	Part Number	Quantity
<div><div></div><div>SESOK Synergy Manager</div></div>		1

**REVIEWED**  
By Devon.Murtha at 12:49 pm, Jun 02, 2025


 <div style="display: inline-block; text-align: left;"> <b>UNIVERSAL RENEWABLES</b>  <small>ELEVATING SOLAR</small> </div>		
<b>CONTRACTOR</b>		
UNIVERSAL RENEWABLES		
ADDRESS: 3516 MASSACHUSETTS AVE NW WASHINGTON, DC 20007		
PHONE: 202.956.8665		
LIC. NO.: 410519000079		
<b>REVISION / RELEASE</b>		
NO.	DESCRIPTION	DATE
<b>PROJECT</b>		
NEW PV SYSTEM: 72.520 kWp		
<b>VICTORY TOWER</b>		
7051 CARROLL AVENUE, TAKOMA PARK, MD 20912		
APN: 01072074		
<b>ENGINEER OF RECORD</b>		
PAPER SIZE: 36" x 24" (ARCH D)		
SHEET TITLE: RESOURCE DOCUMENT		
DATE: 11.07.2024		
DESIGN BY: V.G.		\signature.png
CHECKED BY: M.M.		

**WED**

n.Murtha at 12:49 pm, Jun 02, 2025

B-001



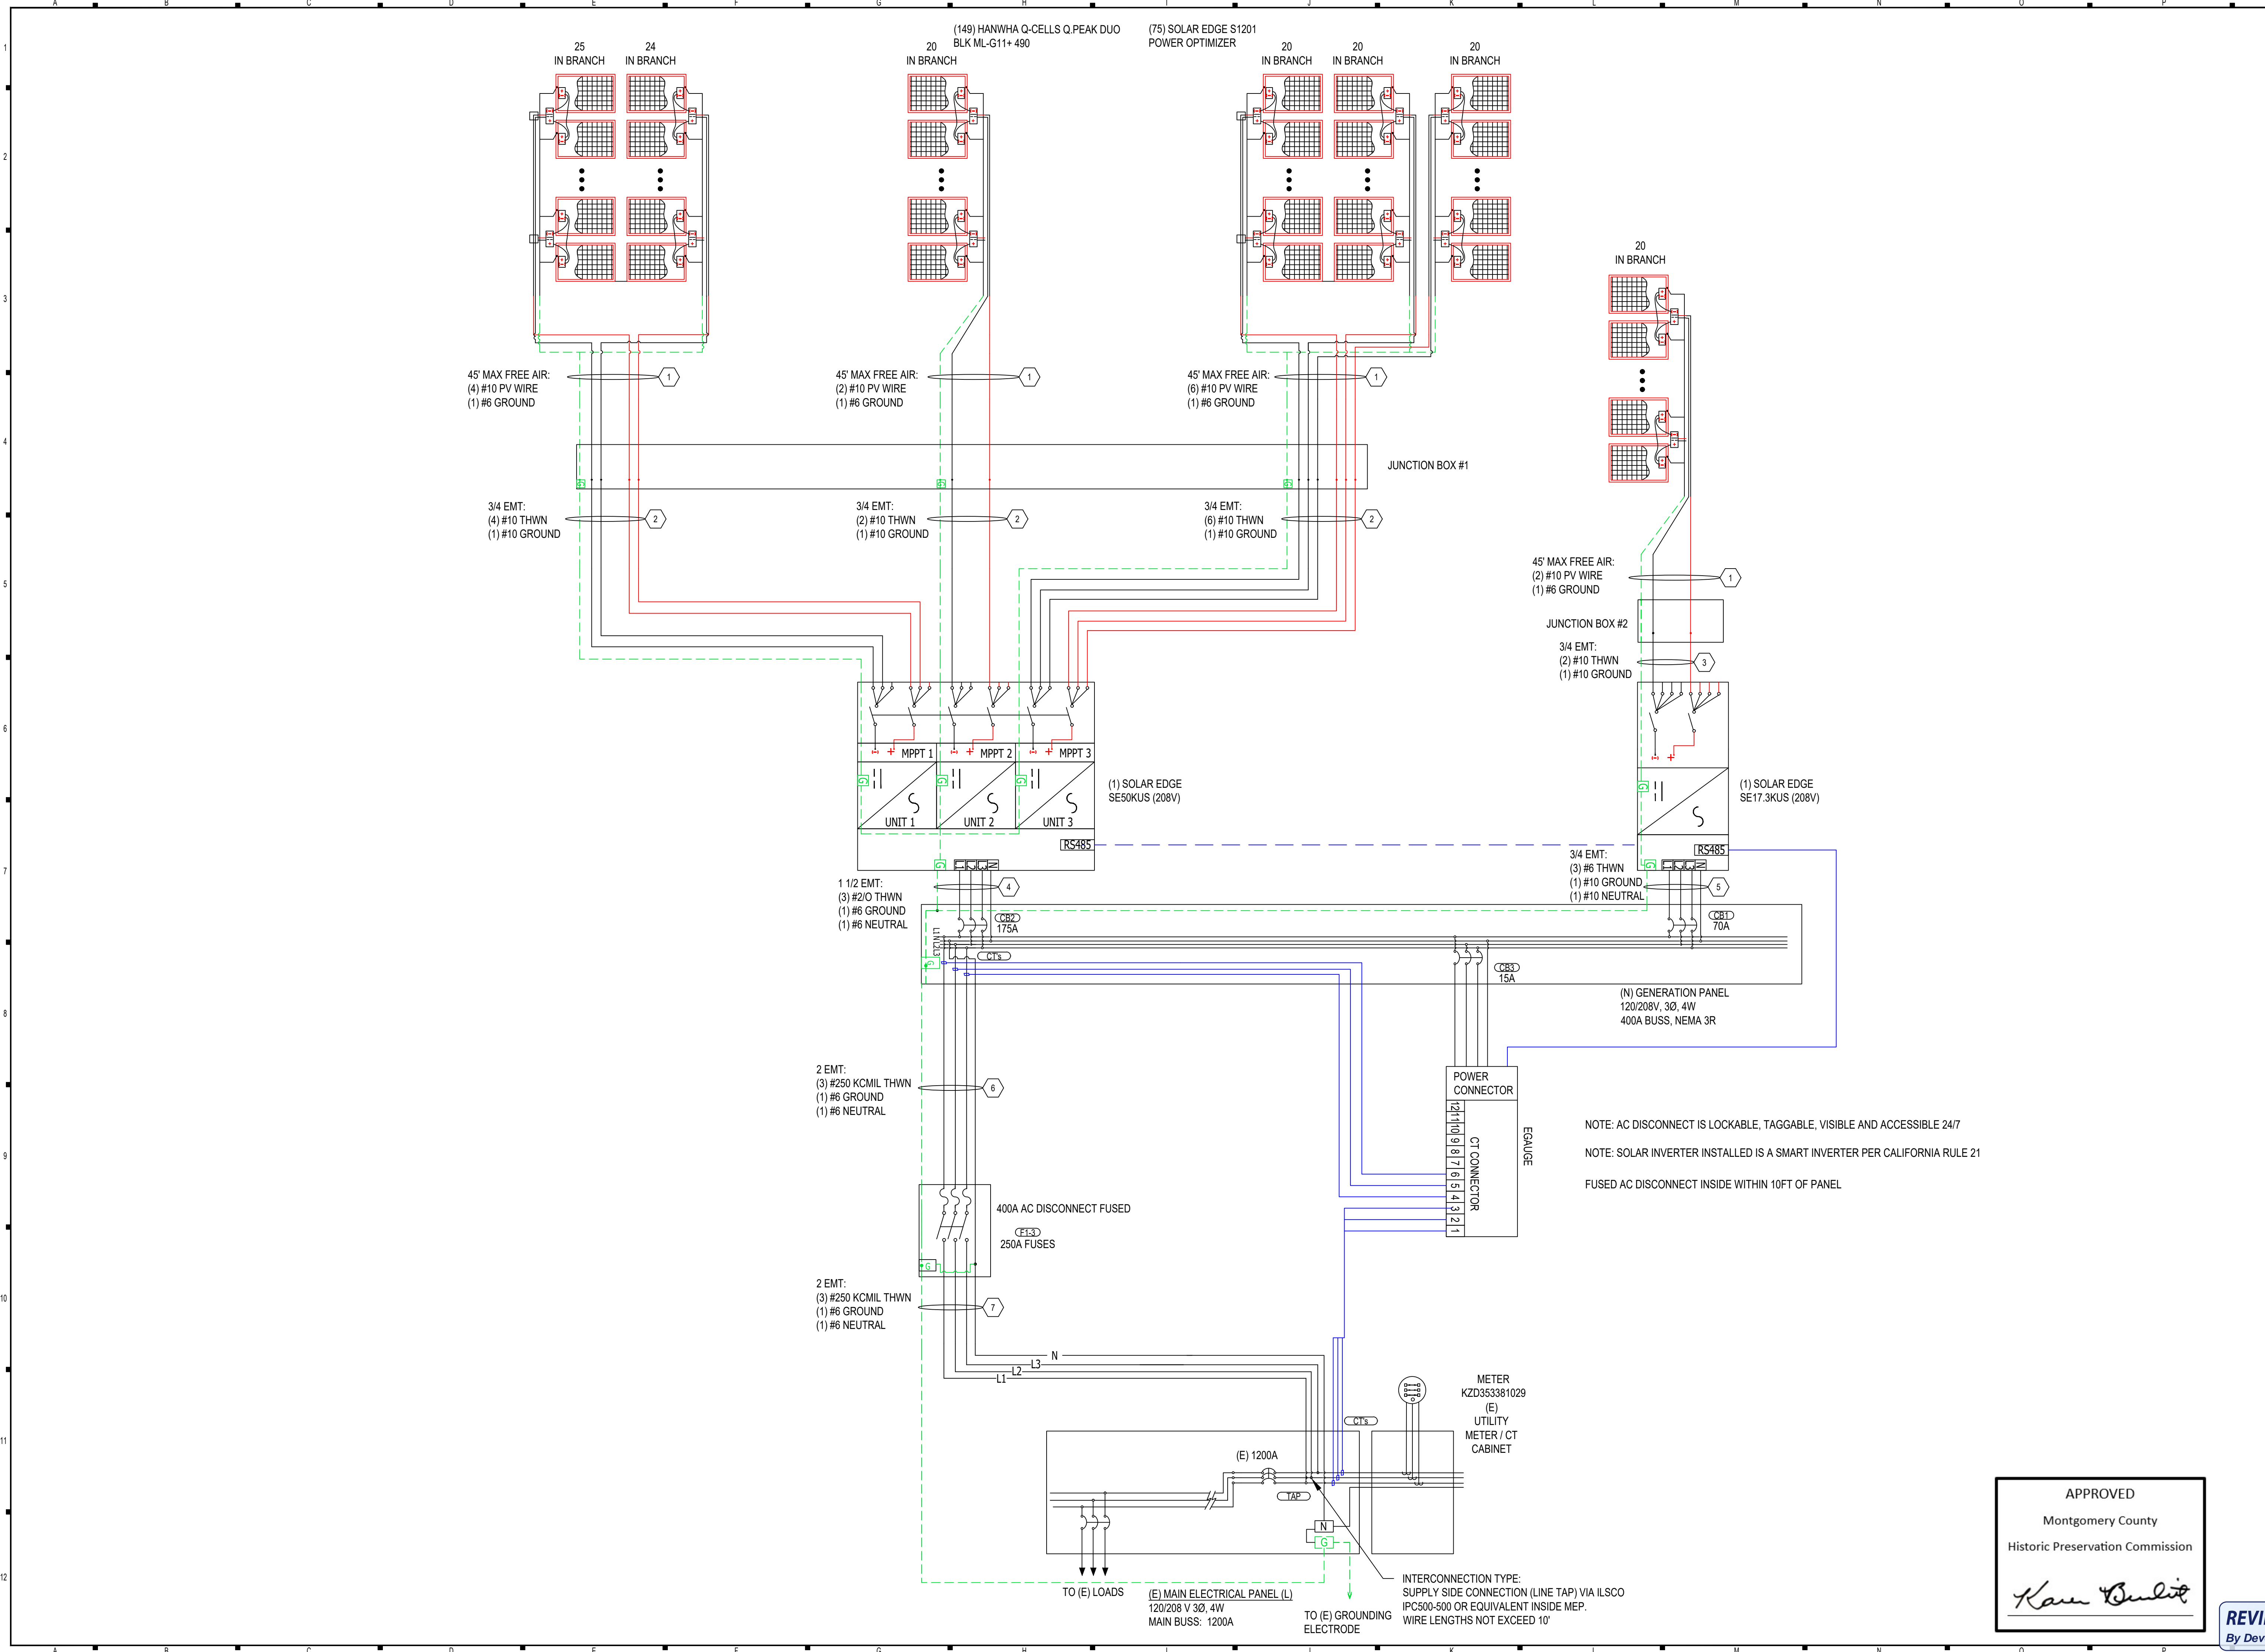

CONTRACTOR

UNIVERSAL RENEWABLES

ADDRESS: 3516 MASSACHUSETTS AVE NW WASHINGTON, DC 20007

PHONE: 202.656.8565

LIC. NO.: 41051900079

REVISION / RELEASE

NO.	DESCRIPTION	DATE


PROJECT

NEW PV SYSTEM: 73.010 kWp

VICTORY TOWER

7051 CARROLL AVENUE, TAKOMA  
PARK, MD 20912  
APN: 01072074

ENGINEER OF RECORD



Digitally signed  
by Methode  
Maniraguha  
Date:  
2024.12.10  
01:31:41  
+05'30'

**Professional Certification:** I hereby  
certify that these documents were  
prepared or approved by me, and that  
I am a duly licensed professional  
engineer under the laws of the State  
of Maryland:  
License No. 52692  
Expiration Date: 05/24/2026

PAPER SIZE: 36" x 24" (ARCH D)

SHEET TITLE:  
LINE DIAGRAM

DATE: 11.07.2024

DESIGN BY: V.G.

CHECKED BY: M.M.

SHEET NUMBER:

APPROVED

Montgomery County

Historic Preservation Commission

*Karen Buelit*

REVIEWED

By Devon.Murtha at 12:50 pm, Jun 02, 2025

E-601



CONDUCTOR AND CONDUIT SCHEDULE W/ELECTRICAL CALCULATIONS														
ID	TYPICAL	CONDUCTOR	CONDUIT	CURRENT-CARRYING CONDUCTORS IN CONDUIT	OCPD	EGC	TEMP. CORR. FACTOR	CONDUIT FILL FACTOR	CONT. CURRENT	MAX. CURRENT (125%)	BASE AMP.	DERATED AMP.	TERM. TEMP. RATING	AMP. @ TERMINAL
1	7	10 AWG PV WIRE, COPPER	FREE AIR	2	N/A	6 AWG BARE, COPPER	0.91 (35.2 °C)	1	18A	22.5A	55A	50.05A	75°C	35A
2	3	10 AWG THWN-2, COPPER	0.75" DIA EMT	3	N/A	10 AWG THWN-2, COPPER	0.91 (35.2 °C)	1	18A	22.5A	40A	36.4A	75°C	35A
3	1	10 AWG THWN-2, COPPER	0.75" DIA EMT	2	N/A	10 AWG THWN-2, COPPER	0.91 (35.2 °C)	1	18A	22.5A	40A	36.4A	75°C	35A
4	1	2/O AWG THWN-2, COPPER	1.5" DIA EMT	3+N	175A	6 AWG THWN-2, COPPER	0.91 (35.2 °C)	1	139.5A	174.38A	195A	177.45A	75°C	175A
5	1	6 AWG THWN-2, COPPER	0.75" DIA EMT	3+N	70A	10 AWG THWN-2, COPPER	0.91 (35.2 °C)	1	48.25A	60.31A	75A	68.25A	75°C	65A
6	1	250 kcmil THWN-2, COPPER	2" DIA EMT	3+N	250A	4 AWG THWN-2, COPPER	0.91 (35.2 °C)	1	187.75A	234.69A	290A	263.9A	75°C	255A
7	1	250 kcmil THWN-2, COPPER	2" DIA EMT	3+N	N/A	4 AWG THWN-2, COPPER	0.91 (35.2 °C)	1	187.75A	234.69A	290A	263.9A	75°C	255A

\*FOR AMPACITIES ABOVE 100 A  
TERMINALS TO BE RATED FOR 75°C

SYSTEM SUMMARY				
	INVERTER #1			INVERTER #2
	STRING #1	STRING #2	STRING #3-6	STRING #1
POWERBOX MAX OUTPUT CURRENT	18A	18A	18A	18A
OPTIMIZERS IN SERIES	13	12	10	10
NOMINAL STRING VOLTAGE	400V	400V	400V	600V
ARRAY OPERATING CURRENT	30.63A	29.4A	24.5A	16.33A
ARRAY STC POWER	63,210W			9,800W
ARRAY PTC POWER	59,224W			9,182W
MAX AC CURRENT	139.5A			48.25A
MAX AC POWER	50,000W			17,300W
DERATED (CEC) AC POWER	50,000W			8,845W
TOTAL STC POWER	73,010W			
TOTAL PTC POWER	68,406W			
MAX AC CURRENT	187.75A			
MAX AC POWER	67,300W			
DERATED (CEC) AC POWER	58,845W			

MODULES										
REF.	QTY.	MAKE AND MODEL			PMAX	PTC	ISC	IMP	VOC	VMP
PM1-149	149	HANWHA Q-CELLS Q.PEAK DUO BLK ML-G11+ 490			490W	459.1W	11..20A	10.67A	53.86V	45.93V

INVERTERS									
REF.	QTY.	MAKE AND MODEL			AC VOLTAGE	GROUND	OCPD RATING	RATED POWER	MAX OUTPUT CURRENT
I1	1	SOLAR EDGE SE50KUS (208V)			208V	FLOATING	175A	50000W	139.5A
I2	1	SOLAR EDGE SE17.3KUS (208V)			208V	FLOATING	70A	17300W	48.25A

POWER OPTIMIZERS						
REF.	QTY.	MODEL	RATED INPUT POWER	MAX OUTPUT CURRENT	MAX INPUT ISC	MAX DC VOLTAGE
P01-75	75	SOLAR EDGE P1101	1100W	18A	15A	80V

DISCONNECTS			
REF.	QTY.	MAKE AND MODEL	RATED CURRENT
SW1	1	SQUARE D D325NRB OR EQUIV.	400A

OCPDS			
REF.	QTY.	RATED CURRENT	MAX VOLTAGE
CB1	1	70A	208VAC
CB2	1	175A	208VAC
F1-3	3	250A	208VAC

ASHRAE EXTREME LOW	-15°C (5.0°F), SOURCE: WASHINGTONNATIONAL (38.87°; -77.03°)
ASHRAE 2% HIGH	35.2°C (95.4°F), SOURCE: WASHINGTONNATIONAL (38.87°; -77.03°)

INTERACTIVE PHOTOVOLTAIC SYSTEM CONNECTED  
PHOTOVOLTAIC SYSTEM DISCONNECT LOCATED  
NORTH SIDE OF THE HOUSE

**DIRECTORY**  
PERMANENT PLAQUE OR DIRECTORY PROVIDING THE LOCATION OF THE SERVICE DISCONNECTING MEANS AND THE PHOTOVOLTAIC SYSTEM DISCONNECTING MEANS IF NOT IN THE SAME LOCATION (5 3/4" X 1 1/8").  
[NEC 690.56(B)]  
WHERE THE PV SYSTEMS ARE REMOTELY LOCATED FROM EACH OTHER, A DIRECTORY IN ACCORDANCE WITH 705.10 SHALL BE PROVIDED AT EACH PV SYSTEM DISCONNECTING MEANS.  
PV SYSTEM EQUIPMENT AND DISCONNECTING MEANS SHALL NOT BE INSTALLED IN BATHROOMS  
[NEC 690.4(D),(E)]

**LABELING NOTES**  
1.1 LABELING REQUIREMENTS BASED ON THE 2017 NATIONAL ELECTRICAL CODE, INTERNATIONAL FIRE CODE 605.11, OSHA STANDARD 1910.145, ANSI Z535  
1.2 MATERIAL BASED ON THE REQUIREMENTS OF THE AUTHORITY HAVING JURISDICTION.  
1.3 LABELS TO BE OF SUFFICIENT DURABILITY TO WITHSTAND THE ENVIRONMENT INVOLVED.  
1.4 LABELS TO BE A MINIMUM LETTER HEIGHT OF 3/8" AND PERMANENTLY AFFIXED.  
1.5 ALERTING WORDS TO BE COLOR CODED. "DANGER" WILL HAVE RED BACKGROUND; "WARNING" WILL HAVE ORANGE BACKGROUND; "CAUTION" WILL HAVE YELLOW BACKGROUND. [ANSI Z535]  
1.6 ALL SIGNAGE MUST BE PERMANENTLY ATTACHED AND BE WEATHER RESISTANT/SUNLIGHT RESISTANT AND CANNOT BE HAND-WRITTEN PER NEC 110.21(B)

⚠️ WARNING

ELECTRICAL SHOCK HAZARD

TERMINALS ON THE LINE AND LOAD SIDES MAY BE ENERGIZED IN THE OPEN POSITION


**LABEL 1**  
AT EACH DISCONNECTING MEANS FOR PHOTOVOLTAIC EQUIPMENT (2" X 4").  
[NEC 690.13].

⚠️ WARNING

POWER SOURCE OUTPUT CONNECTION DO NOT RELOCATE THIS OVERCURRENT DEVICE

**LABEL 2**  
AT POINT OF INTERCONNECTION OVERCURRENT DEVICE (2" X 4").  
[NEC 705.12(B)(2)(3)(B)].

SOLAR PV SYSTEM EQUIPPED WITH RAPID SHUTDOWN

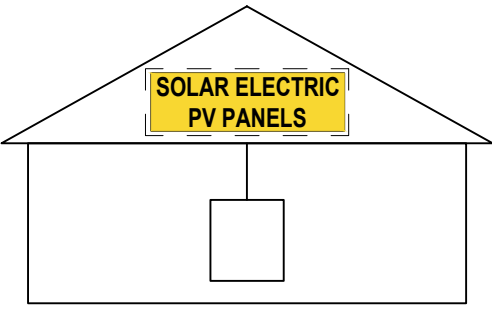

TURN RAPID SHUTDOWN SWITCH TO THE "OFF" POSITION TO SHUT DOWN PV SYSTEM AND REDUCE SHOCK HAZARD IN ARRAY

**LABEL 3**  
AT RAPID SHUTDOWN SYSTEM (3 3/4" X 5 1/4"). [NEC 690.56(C)(1)(A)].

WARNING: PHOTOVOLTAIC POWER SOURCE

**LABEL 4**  
AT EXPOSED RACEWAYS, CABLE TRAYS, AND OTHER WIRING METHODS; SPACED AT MAXIMUM 10 FT SECTION OR WHERE SEPARATED BY ENCLOSURES, WALLS, PARTITIONS, CEILINGS, OR FLOORS (5 3/4" X 1 1/8").  
[NEC 690.31(G)]  
LETTERS AT LEAST 3/8 INCH; WHITE ON RED BACKGROUND; REFLECTIVE  
[IFC 605.11.1.1]

RAPID SHUTDOWN SWITCH FOR SOLAR PV SYSTEM

**LABEL 5**  
AT RAPID SHUTDOWN DISCONNECT SWITCH (5 1/4" X 2").  
[NEC 690.56(C)(3)].

⚠️ CAUTION

SOLAR ELECTRIC SYSTEM CONNECTED

**LABEL 6**  
AT UTILITY METER (5 3/4" X 1 1/8")  
[NEC 690.56(B)]

⚠️ WARNING

TRIPLE POWER SUPPLY SOURCES: UTILITY GRID BATTERY AND PV SOLAR ELECTRIC SYSTEM

**LABEL 7**  
AT POINT OF INTERCONNECTION (2 3/4" X 1 5/8").  
[NEC 705.12(B)(3)]

⚠️ WARNING

SOLAR ELECTRIC CIRCUIT BREAKER IS BACKFED

**LABEL 8**  
AT POINT OF INTERCONNECTION (2" X 1").  
[NEC 705.12(B)(3)]

PHOTOVOLTAIC SOLAR DC DISCONNECT

**LABEL 10**  
AT EACH DC DISCONNECTING MEANS (4" X 1").  
[NEC 690.13(B)].

PHOTOVOLTAIC SOLAR AC DISCONNECT

**LABEL 9**  
AT EACH AC DISCONNECTING MEANS (4" X 1").  
[NEC 690.13(B)].

⚠️ PHOTOVOLTAIC SYSTEM AC DISCONNECT ⚠️

RATED AC OUTPUT CURRENT 187.75 A  
NOMINAL OPERATING AC VOLTAGE 208 V

**LABEL 11**  
AT POINT OF INTERCONNECTION, MARKED AT DISCONNECTING MEANS (4" X 2").  
[NEC 690.54]

PHOTOVOLTAIC SYSTEM DC DISCONNECT

OPERATING VOLTAGE 400 VDC

OPERATING CURRENT 109.3 ADC

MAX SYSTEM VOLTAGE 600 VDC

SHORT CIRCUIT CURRENT 108 ADC

⚠️ WARNING ⚠️

ELECTRICAL SHOCK HAZARD DO NOT TOUCH TERMINALS

TERMINALS ON BOTH THE LINE AND LOAD SIDES MAY BE ENERGIZED IN THE OPEN POSITON

**LABEL 12**  
AT EACH DC DISCONNECTING MEANS (4" X 5"). [NEC 690.14 (C)(2), 690.17 (4), 690.53]

PHOTOVOLTAIC SYSTEM DC DISCONNECT

OPERATING VOLTAGE 600 VDC

OPERATING CURRENT 16.33 ADC

MAX SYSTEM VOLTAGE 600 VDC


SHORT CIRCUIT CURRENT 18 ADC


⚠️ WARNING ⚠️

ELECTRICAL SHOCK HAZARD DO NOT TOUCH TERMINALS

TERMINALS ON BOTH THE LINE AND LOAD SIDES MAY BE ENERGIZED IN THE OPEN POSITON

**LABEL 13**  
AT EACH DC DISCONNECTING MEANS (4" X 5"). [NEC 690.14 (C)(2), 690.17 (4), 690.53]

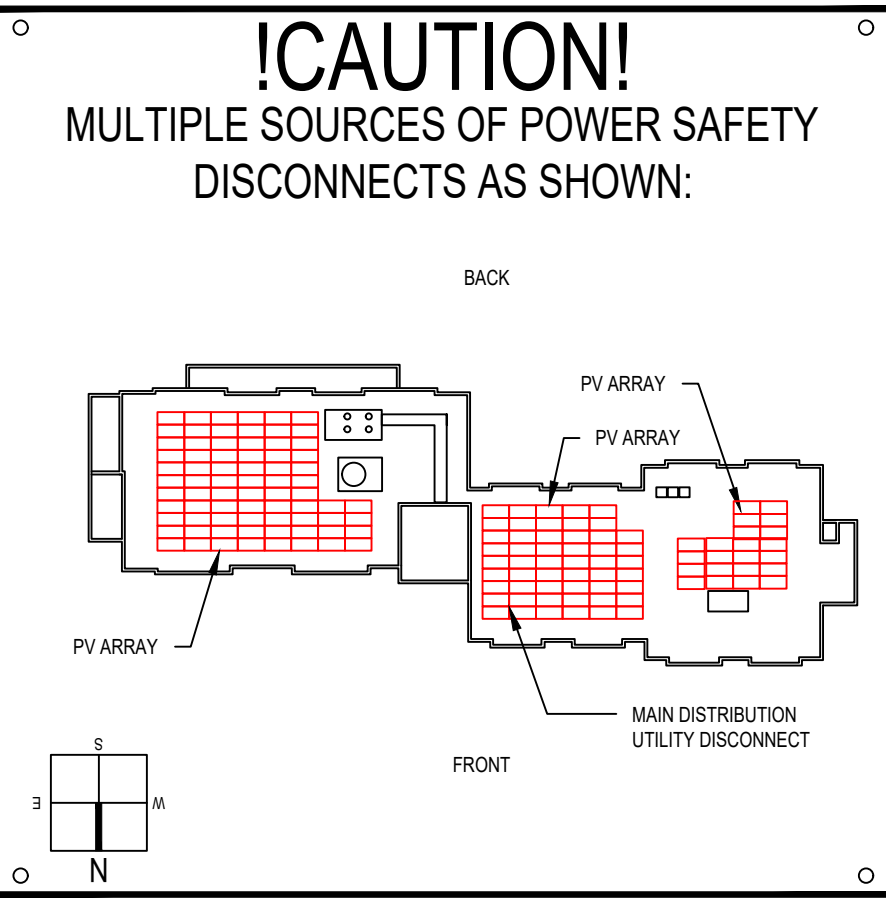



UNIVERSAL RENEWABLES  
ELEVATING SOLAR

CONTRACTOR

UNIVERSAL RENEWABLES

ADDRESS: 3516 MASSACHUSETTS AVE NW WASHINGTON, DC 20007

PHONE: 202.956.8565

LIC. NO.: 41051900079

REVISION / RELEASE

NO.	DESCRIPTION	DATE

PROJECT


NEW PV SYSTEM: 73.010 kWp

VICTORY TOWER

7051 CARROLL AVENUE, TAKOMA PARK, MD 20912

APN: 01072074

ENGINEER OF RECORD

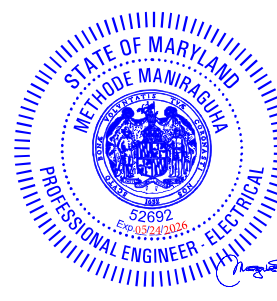


Digitally signed by Methode Maniraguha  
Date: 2024.12.10 01:31:41 +05'30'

Professional Certification: I hereby certify that these documents were prepared or approved by me, and that I am a duly licensed professional engineer under the laws of the State of Maryland:  
License No. 52692  
Expiration Date: 05/24/2026

PAPER SIZE: 36" x 24" (ARCH D)

SHEET TITLE: PLACARDS

DATE: 11.07.2024

DESIGN BY: V.G. 


CHECKED BY: M.M.

SHEET NUMBER: E-602

APPROVED

Montgomery County

Historic Preservation Commission



REVIEWED

By Devon.Murtha at 12:50 pm, Jun 02, 2025



TEMPERATURE COEFFICIENTS	α	P <sub>max</sub>
Temperature Coefficient of α	0.0001	-0.0001
Temperature Coefficient of P <sub>max</sub>	-0.0001	-0.0001

## The best choice for SolarEdge enabled systems

- Specifically designed to work with power optimizers
- Quick and easy inverter commissioning directly from a smartphone using the SolarEdge SetApp
- Fixed voltage inverter for superior efficiency (97.5%) and longer strings
- Built-in type 2 DC and AC Surge Protection, to better withstand lightning events
- Small, lightest in its class, and easy to install outdoors or indoors on provided bracket
- Integrated arc fault protection and rapid shutdown for NEC 2014 and 2017, per article 690.12 and 690.12
- Built-in module-level monitoring with Ethernet, wireless or cellular communication for full system visibility
- Integrated Safety Switch
- UL1741 SA certified, for CPUC Rule 21 grid compliance

© 2016 SolarEdge Technologies, Inc. All rights reserved. SOLAREDGE, the SolarEdge logo, OPTIMIZERS BY SOLAREDGE are trademarks or registered trademarks of SolarEdge Technologies, Inc. All other trademarks contained herein are trademarks of their respective owners. (Date: 4 August 2022, 02:00:00) Please Subject to change without notice.

<b>DC SAFETY SWITCH</b>	24V, interlocks
IEC Disconnect	Bafl m
<b>STANDARD COMPLIANCE</b>	
Listing	UL 800RB, CSA C22.2 250.1 Canadian-ETC according to I.T.I. M-07
Grid Connection Standards	IEEE 348, Rule 25, Rule 14 (B)
Protectors	CCC part 15, Class A

(1) For each regional setting please contact local fire support.  
 (2) Where permitted by local regulations.  
 (3) For a full list of the optional accessories please, visit <https://www.silabs.com/development-tools/2020/mcu-stk-116-2020/mcu-stk-116-2020>  
 webpage. <https://www.silabs.com/development-tools/2020/mcu-stk-116-2020> to download the relevant product database!

For additional information about iSPG, i-SPG Power or i-SPG Power in Europe, click on [Power Applications](#) below for more details.

### SPG System Design Using a Solating Inverter\*






	200V Grid iSPG	270V Grid iSPG	270V/480V Grid iSPG	277/480V Grid iSPG
<b>Complete System Options</b>				
Minimum Spg. Power Options	8	10	14	14
Length	27	37	51	51
Minimum Spg. Power Options	30	30	40	40
Length	30	30	40	40
Minimum Spg. Power Options	10	10	60	60
Length	10	10	60	60
Maximum Continuous Power per String (kW)	1 string = 800W 2 string or more = 1600W	1 string = 1000W 2 string or more = 1500W	1 string = 1750W 2 string or more = 2000W	1 string or less = 1750W 2 string or more = 2000W
Maximum Allowed Continuous Power per String**	Yes	Yes	Yes	Yes
Parallel String of Different Length or Orientations	Yes	Yes	Yes	Yes
Maximum Difference in Number of Power Optimizers: Power Optimizers in Shorter and Longer String	Yes	Yes	Yes	Yes
Maximum Difference in Number of Power Optimizers: Power Optimizers in Shorter and Longer String Connected to the Same Inverter	(3 Power Optimizers)			

\* The same rules apply for Stringing rules as equivalent power, but as part of the module Spg. Technology installer.  
 \*\* Power Optimizers in Shorter and Longer String must be connected to a single PV module or 2. If each Power Optimizer connected to a single PV module or 2.  
 \* Design with three phase 200V systems is based on the Solating Design for verification.  
 \* Do not connect iSPG power string design your project using Solating Design for verification.



© 2012 SolarTech Systems, Inc. All rights reserved. SOLARTECH, iSPG and i-SPG are trademarks or registered trademarks of SolarTech Systems, Inc. All other trademarks or registered trademarks of the respective owners. Please contact your local distributor for more information.





### SIMULATION RESULTS




				
Installed DC Power	Max Achieved AC Power	Annual Solar Energy Production	Annual CO2 Emission Saved	Annual Equivalent Trees Planted
73.01 kWp	50.97 kW	90.37 MWh	63.89 t	2,935

### PV MODULES

# Module	Model	Peak power	Racking type	Orientation	Azimuth	Tilt
149	Hanwha Q Cells GmbH, Q PEAK DUO XL-G10.3 / BFG 400W (user-defined)	73 kWp			180°	0°
Total:	149	73 kWp				

### BILL OF MATERIALS (BOM)

Items	Part Number	Quantity
 SEKISOL Synergy Manager		1

Inverters & Storage	Strings per inverter	Optimizers per string	PV modules per string
<div> <div></div> <div> <div>1</div> <div>SESGK Synergy Manager</div> <div>Center Unit</div> </div> </div> <div> <div></div> <div> <div>62kW   124% Oversizing</div> </div> </div>	<div> <div></div> <div>1 x string</div> </div> <div> <div></div> <div>1 x string</div> </div>	<div> <div></div> <div>12 x P1101 (For rooftops) (2:1), 1 x P1101 (For rooftops) (1:1)</div> </div> <div> <div></div> <div>12 x P1101 (For rooftops) (2:1)</div> </div>	<div> <div></div> <div>25</div> </div> <div> <div></div> <div>24</div> </div>
Left Unit			
	<div> <div></div> <div>1 x string</div> </div>	<div> <div></div> <div>10 x P1101 (For rooftops) (2:1)</div> </div>	<div> <div></div> <div>20</div> </div>
Right Unit			
	<div> <div></div> <div>3 x strings</div> </div>	<div> <div></div> <div>10 x P1101 (For rooftops) (2:1)</div> </div>	<div> <div></div> <div>20</div> </div>
<div> <div></div> <div> <div>1</div> <div>SE17.3K-US</div> <div></div> </div> </div> <div> <div></div> <div> <div>9.61kW   56% Oversizing</div> </div> </div>	<div> <div></div> <div>1 x string</div> </div>	<div> <div></div> <div>10 x P1101 (For rooftops) (2:1)</div> </div>	<div> <div></div> <div>20</div> </div>




**UNIVERSAL  
RENEWABLES**  
ELEVATING SOLAR

Karen Benoit



NEW SOLAR CANOPY STRUCTURAL  
SUPPORT DESIGN AT  
7051 CARROLL AVE.  
TAKOMA PARK, MD

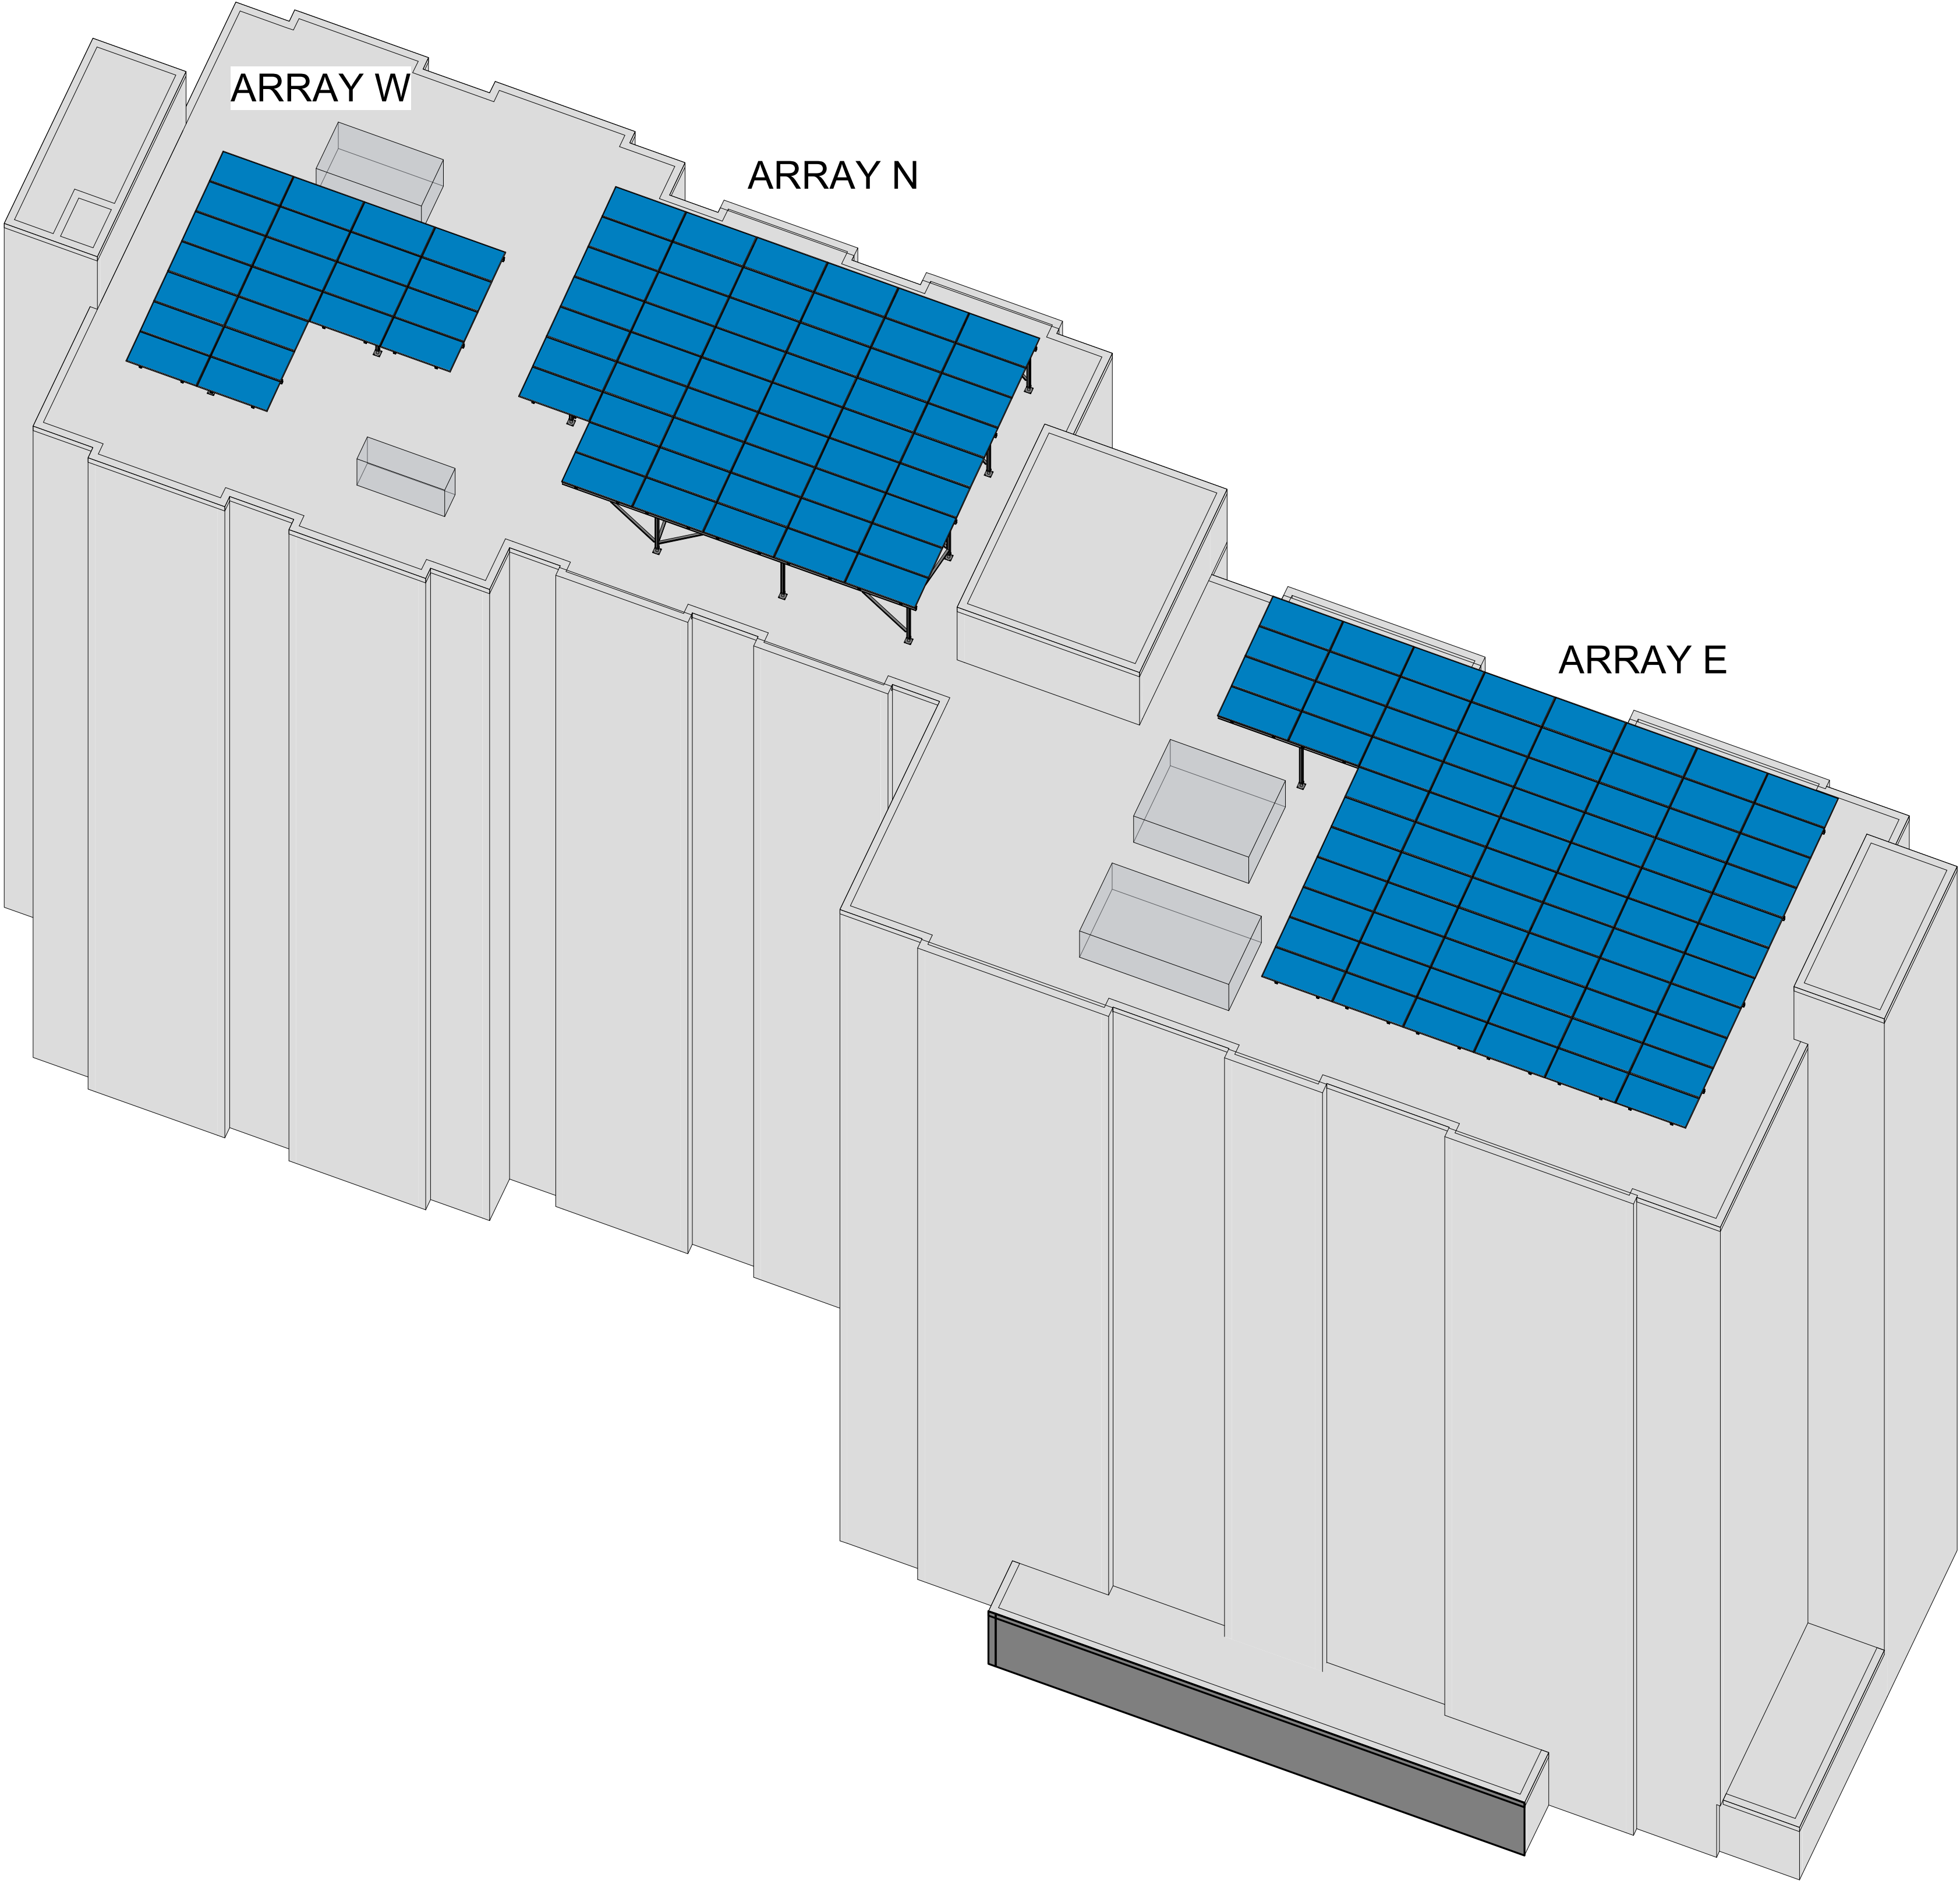

SHEET NO.	SHEET NAME
S-01	COVER SHEET
S-02	GENERAL NOTES
S-11	PANEL LAY
S-12	POST LAYO
S-13	BEAM FRA
S-14	BRACE FR
S-15	SUPPORT I
S-21	DETAILS
S-22	DETAILS
S-31	ELEVATION
TOTAL: 10	


APPROVED

Montgomery County

Historic Preservation Commission

*Karen Bulleit*

UNIVERSAL RENEWABLES  
3516 MASSACHUSETTS AVE NW  
WASHINGTON, DC 20007

 **UNIVERSAL  
RENEWABLES**  
ELEVATING SOLAR

LICENSE# 410519000079

ENGINEER OF RECORD  
KSB STRUCTURAL ENGINEERING

 **KSB  
ENGINEERS**

www.ksb-engineers.com

  
*K. Bulleit*  
2/19/2025

NO.	ISSUE/REVISION DESCRIPTION	DATE	PERMIT
1		2/19/2025	

NEW PV SYSTEM  
7051 CARROLL AVE.  
TAKOMA PARK, MD

COVER SHEET

S 01

REVIEWED  
By Devon.Murtha at 12:50 pm, Jun 02, 2025



PROJECT DESCRIPTION

ROOF MOUNTED SOLAR PANELS AND RACKING SYSTEM TO EXISTING STRUCTURE:

PROJECT CONSISTS OF INSTALLING NEW SOLAR PANEL AND SUPPORTING RACKING SYSTEM TO AN EXISTING STRUCTURE. THE PROJECT IS LOCATED AT 7051 CARROLL AVE, TAKOMA PARK, MD. THE EXISTING STRUCTURE IS A MULTI-FAMILY SENIOR RESIDENTIAL BUILDING FRAMED OUT OF CONCRETE. THE SOLAR PANELS INSTALLED ON THE ROOF ARE TO BE SUPPORTED BY A PROPRIETARY RACKING SYSTEM SUPPLIED BY UNIVERSAL ALUMINUM PRODUCTS. THE RACKING SYSTEM IS ALUMINUM AND CONSISTS OF STRINGERS THAT SUPPORT THE SOLAR PANELS. THE STRINGERS ARE SUPPORTED BY BEAM FRAME LINES, WHICH ARE THEN SUPPORTED BY VERTICAL POSTS. THE ENTIRE SYSTEM CONTAINS BRACES TO RESIST LATERAL WIND AND SEISMIC LOADS WHILE PROVIDING STRUCTURE STABILITY. THE SOLAR RACKING SYSTEM IS TO BE PERMANENTLY ATTACHED TO EXISTING ROOF FRAMING. THE PROJECT CONSISTS OF (3) SOLAR PANEL ARRAYS WITH APPROXIMATELY 148 +/-SOLAR PANELS TOTAL.

GENERAL PROJECT SPECIFICATIONS

CONTRACTOR REQUIREMENTS

DIGITAL FILES: PDF STRUCTURAL DRAWINGS SUPERCEDE ANY AND ALL DIGITAL FILES (I.E. DWG, DXF, RVT, ETC.) ANY DISCREPANCIES SHALL BE BROUGHT TO ATTENTION OF DESIGN TEAM. DRAWINGS SHALL NOT BE SCALED.

DRAWING SCALE: DO NOT SCALE DRAWINGS FOR DIMENSIONS. IF ANY DIMENSIONS ARE MISSING SUBMIT AN RFI FOR DESIGN TEAM REVIEW.

COORDINATION: CONTRACTOR SHALL NOTIFY DESIGN TEAM OF ANY AND ALL COORDINATION ISSUES BETWEEN ARCHITECTURAL, STRUCTURAL, MECHANICAL, CIVIL, ELECTRICAL, PLUMBING, INTERIOR DESIGN AND ANY OTHER DESIGN CONSULTANTS.

EXISTING CONDITIONS: FOR EXISTING CONDITIONS OR STRUCTURES, CONTRACTOR SHALL NOTIFY DESIGN TEAM OF ANY AND ALL DISCOVERED ITEMS THAT ARE EITHER DISCREPANCIES OR CONFLICT WITH DESIGN DRAWINGS.

CONSTRUCTION STANDARDS: ALL CONSTRUCTION SHALL BE IN ACCORDANCE WITH 2021 IBC BUILDING CODE. CONSTRUCTION SHALL CONFORM TO MATERIAL INSTALLATION REQUIREMENTS AS OUTLINED IN EACH MATERIAL SECTION. CONTRACTOR SHALL MAINTAIN, ON SITE, A PRINTED VERSION OF EACH CONSTRUCTION BUILDING STANDARD AS APPLICABLE TO PROJECT.

PRODUCT SUBSTITUTIONS: ALTERNATIVE PRODUCTS MAY BE REQUESTED BY THE CONTRACTOR AS A RFI OR SUBMITTAL. SUBSTATIONS SHALL BE EQUIVALENT IN NATURE, STRENGTH AND APPROVALS.

MEANS AND METHODS: CONTRACTOR IS FULLY RESPONSIBLE FOR MEANS AND METHODS. NOTHING IN THE DESIGN DRAWINGS, SUBMITTAL REVIEW OR RFI RESPONSE SHALL CONSTRUCTUE DESIGNER LEAD INSTRUCTIONS ON MEANS AND METHODS. THIS REQUIREMENT SHALL BE EXTEND TO INCLUDE SAFETY.

TEMPORARY CONSTRUCTION LOADS: CONSTRUCTION LOADS SHALL NOT BE GREATER THAN LIVE LOADS LISTED IN GENERAL NOTES. FOR TEMPORARY CONSTRUCTION LOADING EXCEEDING LIVE LOAD CAPACITIES, CONTRACTOR SHALL DEVELOP A TEMPORARY SHORING PLAN OR RECEIVE EOR WRITTEN APPROVAL.

TEMPORARY BRACING: CONTRACTOR IS FULLY RESPONSIBLE FOR ANY TEMPORARY BRACING, SHORING, SUPPORTS, LIFE SAFETY AND CONSTRUCTION ENGINEERING DESIGN UNTIL THE STRUCTURAL SYSTEM IS FULLY INSTALLED AND IN A COMPLETE STATE.

AS-BUILT DRAWINGS: CONTRACTOR SHALL BE RESPONSIBLE FOR MAINTAIN AN AS-BUILT SET OF DOCUMENTS THAT INCLUDES DESIGN CHANGES THROUGH ASIS, RFIS, SSK'S AND SUBMITTALS. CONTRACTOR SHALL PROVIDE A COPY OF AS-BUILT DRAWINGS TO DESIGN TEAM AT COMPLETION OF PROJECT.

SUBMITTALS & RFI'S

SUBMITTALS

SUBMITTAL REVIEW: CONTRACTOR SHALL FULLY REVIEW AND COMMENT ON ALL SUBMITTED SHOP DRAWINGS OR OTHER SUBMITTALS. "RUBBER STAMPED" REVIEWS WILL BE REJECTED BY DESIGN TEAM. DESIGN TEAM REVIEW OF DRAWINGS IS TO ENSURE DESIGN INTENT AND DOES NOT INCLUDE REVIEW OF QUANTITIES OR DIMENSIONS. ERRORS AND OMISSIONS IN APPROVED SHOP DRAWINGS DOES NOT RELIEVE CONTRACTOR OF DUTIES PER STRUCTURAL DRAWINGS. REVIEW COMMENTS SHALL INCLUDE INITIALS AND COMPANY NAME IN EACH COMMENT.

SUBMITTAL REVIEW TIME: SUBMITTALS SHALL BE REVIEWED BY DESIGN TEAM WITH IN 10 BUSINESS DAYS. DESIGN TEAM IS NOT RESPONSIBLE FOR CONSTRUCTION DELAYS ASSOCIATED WITH REVIEW OF SUBMITTALS.

REQUIRED SUBMITTALS: CONTRACTOR SHALL SUBMIT ON ANY AND ALL BUILDING MATERIALS AND SHOP DRAWINGS REQUIRED. AT A MINIMUM, CONTRACTOR SHALL PROVIDE THE FOLLOWING STRUCTURAL SUBMITTALS:

- CONSTRUCTION INSTALLATION QUALITY CONTROL PLAN
- CONSTRUCTION INSTALLATION QUALITY CONTROL PLAN RESULTS AND CONTRACTOR COMPLIANCE STATEMENT LETTER
- PRODUCT DATA FOR ANCHOR RODS & HOLDOWNS OUTSIDE OF THOSE SPECIFIED IN CONTRACT DOCUMENTS

DELEGATED DESIGN: CONTRACTOR SHALL PROVIDED ENGINEERED DRAWINGS AND CALCULATIONS FOR REVIEW OF ANY SUBMITTALS THAT ARE MARKED AS DELEGATED DESIGN. DELEGATED DESIGN SUBMITTALS SHALL INCLUDE A PROFESSIONAL ENGINEERING SEAL FOR THAT STATE THE PROJECT IS LOCATED.

- NO DELEGATED DESIGN REQUIREMENTS

REQUEST FOR INFORMATION (RFIS)

RFIS: RFI SHALL INCLUDE A THOROUGH DESCRIPTION OF THE ISSUE WITH A PROPOSED SOLUTION. RFIS SHALL INCLUDE REFERENCE TO DRAWING NUMBERS, LOCATIONS FROM GRID, DETAIL REFERENCES, PHOTOS AND ANY OTHER PERTINENT INFORMATION. INCOMPLETE OR MINIMALLY DESCRIBED RFIS WILL BE REJECTED.

RFI REVIEW TIME: RFI RESPONSES SHALL BE REVIEWED AND RESPONDED WITH IN 5 BUSINESS DAYS. DESIGN TEAM IS NOT RESPONSIBLE FOR CONSTRUCTION DELAYS ASSOCIATED WITH RFI RESPONSES.

ABBREVIATIONS

A.B.	ANCHOR BOLT	LVL	LAMINATED VENEER LUMBER
ADDL	ADDITIONAL	LW	LIGHT WEIGHT
AFF	ABOVE FINISHED FLOOR	MAX.	MAXIMUM
ALT.	ALTERNATE	MECH.	MECHANICAL
ARCH.	ARCHITECT	MFR	MANUFACTURER
BM	BEAM	MID.	MIDDLE
BOT.	BOTTOM	MIN.	MINIMUM
BRG	BEARING	MISC.	MISCELLANEOUS
BTWN	BETWEEN	MTL	METAL
CANT.	CANTILEVER	N/A	NOT APPLICABLE
CIP	CAST IN PLACE	NOML	NOMINAL
C.J.	CONSTRUCTION JOINT	NTS	NOT TO SCALE
C.L.	CENTERLINE	O.C.	ON CENTER
CLR	CLEAR	O.D.	OUTSIDE DIAMETER
CMU	CONCRETE MASONRY UNIT	PRLL	PARALLEL
CONC.	CONCRETE	PC	PRECAST
CON.	CONNECTION	POF	POUNDS PER CUBIC FOOT
CONST.	CONSTRUCTION	PERIM.	PERIMETER
CONT.	CONTINUOUS	PRP	PERPENDICULAR
CNTR	CENTER	PL	PLATE
DBL	DOUBLE	PLY.	PLYWOOD
DTL.	DETAIL	PSF	POUNDS PER SQUARE FOOT
DF	DOUGLAS FIR	PSI	POUNDS PER SQUARE INCH
DIA.	DIAMETER	PT	PRESSURE TREATED
DIAG.	DIAGONAL	R	RADIUS
DWGS	DRAWINGS	REF	REFER TO
DWLS(S)	DOWEL(S)	REINF.	REINFORCEMENT
EA.	EACH	REQD	REQUIRED
E.F.	EACH FACE	RTU	ROOF TOP UNIT
E.J.	EXPANSION JOINT	SCHED	SCHEDULE
ELV	ELEVATION	SMT	SHEET
EOR	ENGINEER OF RECORD	SIM	SIMILAR
EQ.	EQUAL	S.O.G.	SLAB-ON-GRADE
E.W.	EACH WAY	SPEC.	SPECIFICATION
EXP.	EXPANSION	SS	STAINLESS STEEL
EXT.	EXTERIOR	STD	STANDARD
FDN	FOUNDATION	STIFF.	STIFFENER
F.F.	FINISHED FLOOR	T&B	TOP AND BOTTOM
FTG	FOOTING	TEMP.	TEMPERATURE
GA.	GAGE	TEN.	TENSION
GALV.	GALVANIZE	TERM.	TERMINATE
GL	GLULAM	THK	THICKNESS
FT	FOOT	T.O.B.	TOP OF BEAM
HAS	HEADED ANCHOR STUD	T.O.C.	TOP OF CONCRETE
HORIZ	HORIZONTAL	T.O.F.	TOP OF FOOTING
HRS	HOLLOW STRUCTURAL SECTION	T.O.P.	TOP OF PIER
HT	HEIGHT	T.O.S.	TOP OF SLAB
I.D.	INSIDE DIAMETER	TYP	TYPICAL
I.F.	INSIDE FACE	U.N.O.	UNLESS NOTED OTHERWISE
IN	INCH	VAR.	VARIES
INFO.	INFORMATION	VERT.	VERTICAL
INT.	INTERIOR	W/	WITH
LBS	POUNDS	W/O	WITHOUT
LLH	LONG LEG HORIZONTAL	WP	WORK POINT
LLV	LONG LEG VERTICAL	WT	WEIGHT
		WWM	WELDED WIRE MESH

STRUCTURAL DESIGN CRITERIA

GOVERNING DESIGN CODES:

MUNICIPALITY: MARYLAND BUILDING PERFORMANCE STANDARDS

GOVERNING CODE: 2021 IBC INTERNATIONAL BUILDING CODE

EXISTING BUILDING CODE: 2021 IBC INTERNATIONAL EXISTING BUILDING CODE

BUILDING LOADS: ASCE 7-16 MINIMUM DESIGN LOADS AND ASSOCIATED CRITERIA FOR BUILDINGS AND OTHER STRUCTURES

STRUCTURAL STEEL: AISC 360 SPECIFICATION FOR STRUCTURAL STEEL BUILDINGS

STEEL SEISMIC: AISC 341 SEISMIC PROVISIONS FOR STRUCTURAL STEEL BUILDINGS

CONCRETE: ACI 318 BUILDING CODE REQUIREMENTS FOR STRUCTURAL CONCRETE

MASONRY: TMS 402 BUILDING CODE REQUIREMENTS FOR MASONRY STRUCTURES /TMS 402-16)

WOOD: AWC NDS NATIONAL DESIGN SPECIFICATION FOR WOOD CONSTRUCTION (NDS-05)

WOOD SEISMIC & WIND: SDPWS SPECIAL DESIGN PROVISIONS FOR WIND AND SEISMIC

COLD-FORMED STEEL: AISI S100 NORTH AMERICAN SPECIFICATION FOR THE DESIGN OF COLD-FORMED STEEL STRUCTURAL MEMBERS

COLD-FORMED STEEL SEISMIC: AISI S400 NORTH AMERICAN STANDARD FOR SEISMIC DESIGN OF COLD FORMED STEEL STRUCTURAL SYSTEMS

ALUMINUM: ADM 2020 ALUMINUM DESIGN MANUAL

GRAVITY DESIGN LOADS AND CRITERIA

- SOLAR PANELS & RACK STRUCTURE
- SOLAR PANELS: 2.5 PSF
  - RACKING FRAME: SELF-WEIGHT (APPROXIMATELY 1.5 PSF AVERAGE)

- SNOW
- GROUND SNOW LOADING: 25 PSF (ASCE 7)
  - ROOF SNOW LOADING: 20 PSF MIN

SEISMIC LOADS AND CRITERIA

- CRITERIA
- RISK CATEGORY: II
  - IMPORTANCE FACTOR: 1.0
  - SITE CLASS: D
  - 0.2 SEC MCE: GROUND MOTION:  $S_{ps}=0.133$
  - 1.0 SEC MCE: GROUND MOTION:  $S_{ps}=0.043$
  - 0.2 SEC SEISMIC DESIGN VALUE:  $S_{DS}=0.142$
  - 1.0 SEC SEISMIC DESIGN VALUE:  $S_{DI}=0.069$
  - SEISMIC DESIGN CATEGORY: B
  - LATERAL FORCE RESISTING SYSTEM:
    - MECHANICAL AND ELECTRICAL COMPONENTS (BOTH DIRECTIONS)
    - ROOF MOUNTED STACKS LATERALLY BRACED BELOW CENTER OF MASS
  - R FACTOR:  $R=3.0$  (BOTH DIRECTIONS)

- LOADS
- ANALYSIS PROCEDURE: ASCE 7 CHAPTER 13 - SEISMIC DESIGN ON NON-STRUCTURAL COMPONENTS (BOTH DIRECTIONS)
  - BASE SHEAR: N/A - NOT REQUIRED POUNDS/SQUARE-FOOT OF SOLAR PANEL ARRAY (BOTH DIRECTIONS)

WIND LOADS AND CRITERIA


- CRITERIA
- BASIC WIND SPEED: 115 MPH
  - RISK CATEGORY: II
  - EXPOSURE CATEGORY: B

RACKING SYSTEM WIND FORCE RESISTING SYSTEM LOADS:

- BRACED FRAMES

WIND PRESSURES ON SOLAR PANEL ARRAYS:

- ANALYSIS APPROACH: ASCE 7 SECTION 29.4.3 ROOFTOP SOLAR PANELS ON FLAT ROOFS OR COMPONENT AND CLADDING PRESSURES, WHICHEVER IS MOST CONSERVATIVE AND/OR APPLICABLE
- SOLAR PANEL EXPOSURE TYPE: CONSERVATIVELY USE EXPOSED DEFINITION FOR ALL PANELS
- SOLAR PANEL ARRAY PRESSURE AND SUCTIONS ARE PRESENTED IN BELOW DIAGRAM AND TABLE.

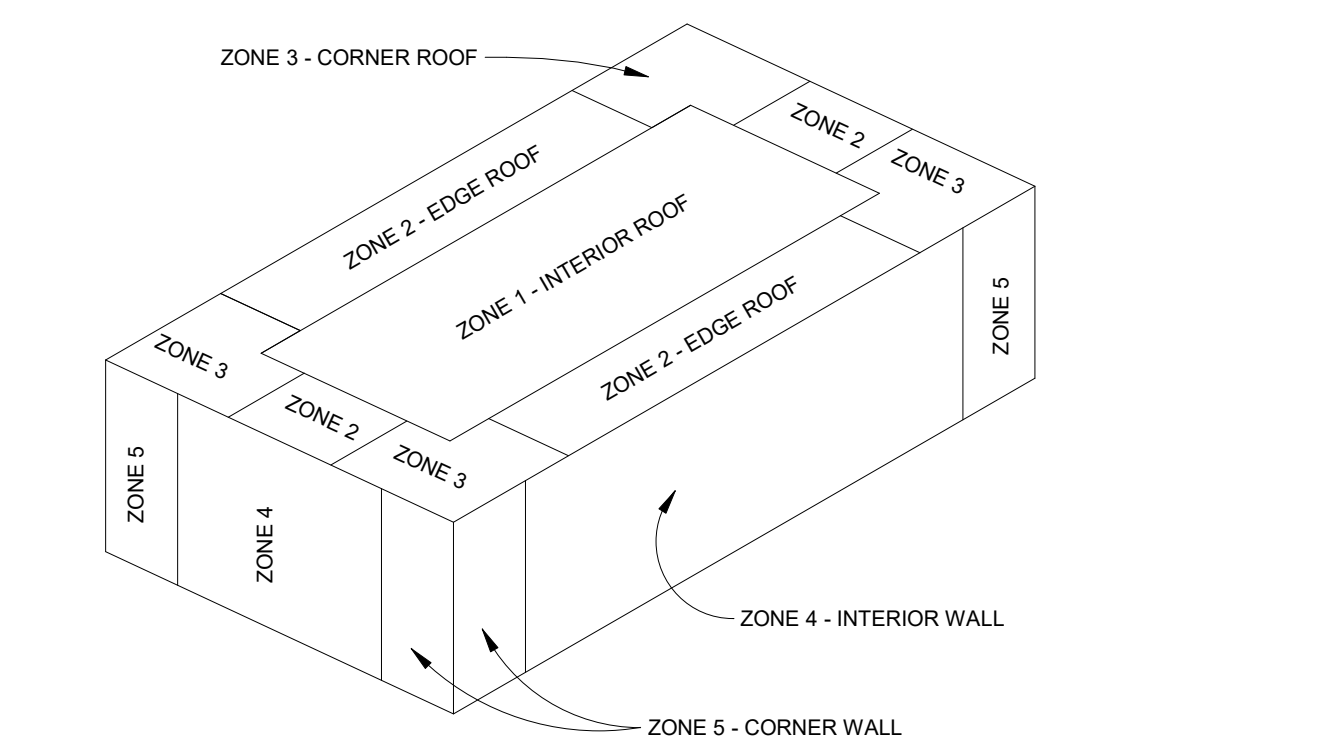

COMPONENT AND CLADDING PRESSURES TABLE

EFFECTIVE WIND AREA ON BUILDING COMPONENT			
ZONE # - ACTION	<10 SF [PSF]	100 SF [PSF]	500+ SF [PSF]
ZONE 1 - SUCTION	-23.5	-16.0	-16
ZONE 2 - SUCTION	-31.2	-16.0	-16
ZONE 3 - SUCTION	-35.7	-16.0	-16
ZONE 4 - SUCTION	N/A	N/A	N/A
ZONE 5 - SUCTION	N/A	N/A	N/A
ROOF - PRESSURE	23.5	16.0	16.0
WALL - PRESSURE	N/A	N/A	N/A
ZONE 4 - PARAPET	N/A	N/A	N/A
ZONE 5 - PARAPET	N/A	N/A	N/A

- NOTES:
- COMPONENT AND CLADDING WIND FORCES ARE PRESENTED AS ULTIMATE WIND PRESSURES. ALLOWABLE WIND PRESSURES MAY BE ASSUMED BY MULTIPLYING THE TABULATED VALUES BY 0.6
  - TABULATED VALUES MAY BE LINEARLY INTERPOLATED FOR SF VALUES BETWEEN THOSE PRESENTED. ALTERNATIVELY & CONSERVATIVELY, FORCES MAY BE ROUNDED UP TO A HIGHER VALUE ASSOCIATED WITH THE LOWER SF TABULATED SF AREA.
  - (-) NEGATIVE VALUES REPRESENT SUCTION FORCES WHICH IS EQUIVALENT TO A COMPONENT OR CLADDING BEING PULLED AWAY FROM THE ATTACHMENT POINTS
  - (+) VALUES REPRESENT PRESSURE FORCES WHICH IS EQUIVALENT TO A COMPONENT OR CLADDING BEING PUSHED TOWARDS THE ATTACHMENT POINTS
  - VALUES ARE COMBINATION OF CODE PRESCRIBED SOLAR PANEL LOADING AND COMPONENT AND CLADDING BASED UPON ENGINEERING JUDGMENT OF MOST CONSERVATIVE AND/OR APPLICABLE.

EXISTING STRUCTURE

EXISTING STRUCTURE INFORMATION PROVIDED:

PDF DRAWINGS: KSB STRUCTURAL ENGINEERING RECEIVED PHOTOS OF EXISTING DRAWINGS REGARDING A RENOVATION TO THE ORIGINAL STRUCTURE.

BUILDING PHOTOGRAPHS: KSB RECEIVED BUILDING PHOTOGRAPHS FROM UNIVERSAL AL. IN Q4 OF 2024.

LIMITED INFORMATION: COMBINATION OF DRAWINGS AND PHOTOS PROVIDED ENOUGH INFORMATION TO DETERMINE FRAMING SCHEME OF STRUCTURE BUT DO NOT PROVIDE EXACT EXISTING BUILDING FRAMING SIZES AND SPACING. ALL EXISTING STRUCTURE FRAMING SHALL BE FIELD VERIFIED PRIOR TO START OF CONSTRUCTION. DISCREPANCIES SHALL BE NOTIFIED TO KSB PRIOR TO INSTALLATION OF SOLAR RACKING SYSTEM.

EXISTING STRUCTURE FRAMING

- ROOF FRAMING
- CAST-IN-PLACE CONCRETE SLAB
  - NOTIFIED OF 10" SLAB THICKNESS

- VERTICAL FRAMING
- RECTANGULAR CONCRETE COLUMNS - CAST-IN-PLACE

EXISTING STRUCTURE CAPACITY REGARDING ADDED SOLAR PANELS

TOTAL ADDED LOAD: TOTAL INCREASE OF DEAD LOAD IS LESS THAN 5% OF EXISTING TOTAL GRAVITY DEMAND. THEREFORE PER INTERNATIONAL EXISTING BUILDING CODE, ADDED SOLAR PANEL FRAMING IS STRUCTURALLY ACCEPTABLE.

REDISTRIBUTION OF LOAD: SLAB WAS ANALYZED TO DISTRIBUTE POST LOADS TO RIBS AND BEAM. DISTRIBUTION OF MULTIPLE RIBS RESULTS IN GREATER DISTRIBUTION OF LOADING POINTS TO MORE CLOSELY MIMIC UNIFORM DISTRIBUTED LOAD OF EXISTING CONDITION TO A STRUCTURALLY ACCEPTABLE DEGREE.

ALUMINUM FRAMING

GENERAL ALUMINUM NOTES:

ALUMINUM FRAMING STANDARDS: ALUMINUM DESIGN MANUAL 2020

STANDARD PRACTICE FOR FABRICATING AND ERECTING: FOLLOW ALUMINUM DESIGN MANUAL 2020 PART IX CODE OF STANDARD PRACTICE FOR FABRICATING AND ERECTING STRUCTURAL ALUMINUM

ALUMINUM MATERIAL GRADE: 6061-T6

ALUMINUM FRAMING MATERIAL SUPPLIER: UNIVERSAL ALUMINUM PRODUCTS (UAP)

UAP PROPRIETARY EXTRUDED ALUMINUM SHAPES

- ROOF MOUNTED STACKS LATERALLY BRACED BELOW CENTER OF MASS
- 3x2 STRINGER
- 4x3 STRINGER OR POST
- 6x3 BEAM
- 9x3 BEAM
- W8x10.7 BEAM
- SEE CALCULATIONS FOR SECTION PROPERTIES OF ALL UAP EXTRUDED SHAPES

- QUALITY CONTROL:
- INSTALLER SHALL MAINTAIN WRITTEN INSTALLATION QUALITY CONTROL PROGRAM.
  - INSTALLER SHALL INSPECT EVERY MEMBER SIZE AND SPLICE LOCATION.
  - INSTALLER SHALL INSPECT EVERY BOLTED OR SCREWED CONNECTION.
  - INSTALLER SHALL PROVIDE KSB STRUCTURAL ENGINEERING A SIGNED LETTER STATING IN-HOUSE INSPECTION WAS COMPLETED AND ALL DEVIATIONS CORRECTED.

- SPECIAL INSPECTIONS:
- KSB STRUCTURAL ENGINEERING SHALL REQUEST FIELD PHOTOS OF VARIOUS LOCATIONS FOR REVIEW.
  - NO 3rd PARTY SPECIAL INSPECTIONS REQUIRED IF INSTALLER PROVIDES WRITTEN QUALITY CONTROL PLAN AND SIGNED LETTER

- SPLICE LOCATIONS:
- SEE DETAILS FOR ALLOWABLE SPLICE LOCATIONS

STEEL FRAMING

STEEL STANDARDS:

ALL STRUCTURAL STEEL DESIGN, FABRICATION AND ERECTION SHALL FOLLOW THE BELOW LISTED STANDARDS.

DESIGN & ENGINEERING: AISC 360 - SPECIFICATIONS FOR STRUCTURAL STEEL BUILDINGS

STANDARD PRACTICES: AISC 303 - CODE OF STANDARD PRACTICE FOR STEEL BUILDINGS AND BRIDGES

BOLTED CONNECTIONS: RCSC - SPECIFICATION FOR STRUCTURAL JOINTS USING HIGH-STRENGTH BOLTS

WELDED CONNECTIONS: AWS D1.1 - STRUCTURAL WELDING CODE - STEEL

STEEL MATERIAL GRADES

ALL STRUCTURAL STEEL SHALL FOLLOW THE BELOW ASTM DESIGNATIONS UNLESS NOTED OTHERWISE ON DRAWINGS.

A992: WF-SHAPES, WT-SHAPES & HP-SHAPES

A36: ANGLES, PLATES, BARS, C-SHAPES, MC-SHAPES, M-SHAPES, S-SHAPES & MISC. STEEL.

A500 GR.B FY=46: HSS SQUARE OR RECTANGULAR

A500 GR.B FY=42: HSS ROUND

A53 GR.B: STEEL PIPE

A325: STEEL BOLTS, UNLESS NOTED OTHERWISE. EXTERIOR PERMANENTLY EXPOSED BOLT ASSEMBLIES SHALL BE TYPE 3.

F1554 GR.55: ANCHOR RODS, UNLESS NOTED OTHERWISE

SHOP PAINTING OR GALVANIZATION

INTERIOR STEEL

ALL STEEL THAT IS WITHIN BUILDING WEATHERPROOFING ENVELOPE NEED NOT BE SHOP PRIMED OR PAINTED. ERECTOR SHALL GIVE CONSIDERATION TO SHOP PRIME FOR ANY STEEL THAT MAY BE TEMPORALLY EXPOSED TO AMBIENT CONDITION FOR A DURATION THAT WOULD ENABLE NOTABLE SURFACE RUST BASED ON LOCAL CONDITIONS. FABRICATOR AND ERECTOR SHALL FOLLOW INDUSTRY STANDARDS FOR GEOGRAPHIC REGION OF PROJECT.

EXTERIOR STEEL

ALL STEEL THAT IS EXTERIOR EXPOSED SHALL BE SHOP PRIMED AND RECEIVE A FINAL RUST INHIBITING COAT OF PAINT.

GALVANIZED STEEL

ONLY GALVANIZE STEEL AS CALLED OUT IN PLAN DETAILS OR NOTES. FOLLOW ASTM; A123, A153 & A385. UNLESS NOTED OTHERWISE, NEVER IMPLEMENT GALVANIZED BOLT ASSEMBLIES.

BASE PLATE GROUTING

PROVIDE HIGH-STRENGTH NON-SHRINK GROUT BELOW ALL POST AND COLUMN BASE PLATES. DRY-PACK GROUT AND PROVIDE QUALITY CONTROL PROGRAM TO ENSURE FULL COVERAGE, STRENGTH AND PROPER CURING.

ADDITIONAL NOTES

STATEMENT OF CODE COMPLIANCE:

OFFICIAL STATEMENT: IT SHALL BE STATED, TO THE BEST OF KSB ENGINEERING'S KNOWLEDGE AND GOOD FAITH EFFORTS, THAT THE STRUCTURAL ENGINEERING DESIGN OF THIS ROOF MOUNTED SOLAR RACKING SYSTEM MEETS MARYLAND BUILDING PERFORMANCE STANDARDS REQUIREMENTS IN ADDITION TO THE 2021 INTERNATIONAL BUILDING CODE REQUIREMENTS.

FASTENER TORQUE SCHEDULE

MECHANICAL CONNECTION	BOLT	TORQUE
5/16-18 SS Hex Bolt	3/4"	100-150 In-Lbs.
5/16-18 SS Hex Bolt	1"	100-150 In-Lbs.
5/16-18 SS Hex Bolt - Piercing	1.25"	100-150 In-Lbs.
5/16-18 SS Hex Bolt - Piercing	Itasca GBL-1/0 (Grounding Lug)	150-200 In-Lbs.
5/16-18 SS Hex Bolt	Waffle & 1" Clip	100-150 In-Lbs.
5/16-18 SS Flathead Machine Screw	3/4" Trox	150-200 In-Lbs.
5/16-18 SS Hex Bolt	5"	100-150 In-Lbs.
1/2-13 Hex Bolt	1"	20-30 Ft-Lbs.
1/2-13 Hex Bolt	2"	20-30 Ft-Lbs.
1/2-13 Hex Bolt	4.5"	15-20 Ft-Lbs.
3/4 SS Hex Bolt	5"	40 Ft-Lbs.

NOTE: ALWAYS USE ALUMINUM NUTS AND SPECIFIED WASHER COMBINATIONS.

UNIVERSAL RENEWABLES  
3516 MASSACHUSETTS AVE NW  
WASHINGTON, DC 20007




LICENSE# 410519000079

ENGINEER OF RECORD  
KSB STRUCTURAL ENGINEERING



www.ksb-engineers.com



2/19/2025

ISSUE/REVISION	DESCRIPTION	DATE					
			NO.	1	PERMIT		
		2/19/2025					

NEW PV SYSTEM  
7051 CARROLL AVE.  
TAKOMA PARK, MD

GENERAL NOTES

S-02

REVIEWED

By Devon.Murtha at 12:50 pm, Jun 02, 2025






**UNIVERSAL**  
**RENEWABLES**  
ELEVATING SOLAR

LICENSE# 410519000079



[www.ksb-engineers.com](http://www.ksb-engineers.com)

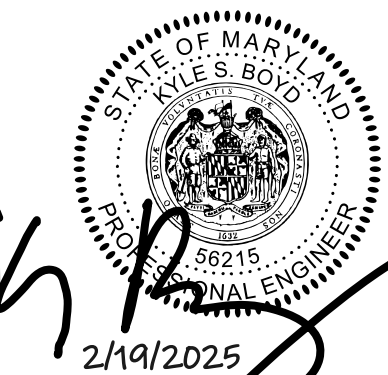[illegible]

NEW PV SYSTEM  
7051 CARROLL AVE.  
TAKOMA PARK, MD

## PANEL LAYOUT

S-11

APPROVED

Montgomery County


Historic Preservation Commission

*Karen Benoit*

;

**REVIEWED**

By Devon.Murtha at 12:50 pm, Jun 02, 2025

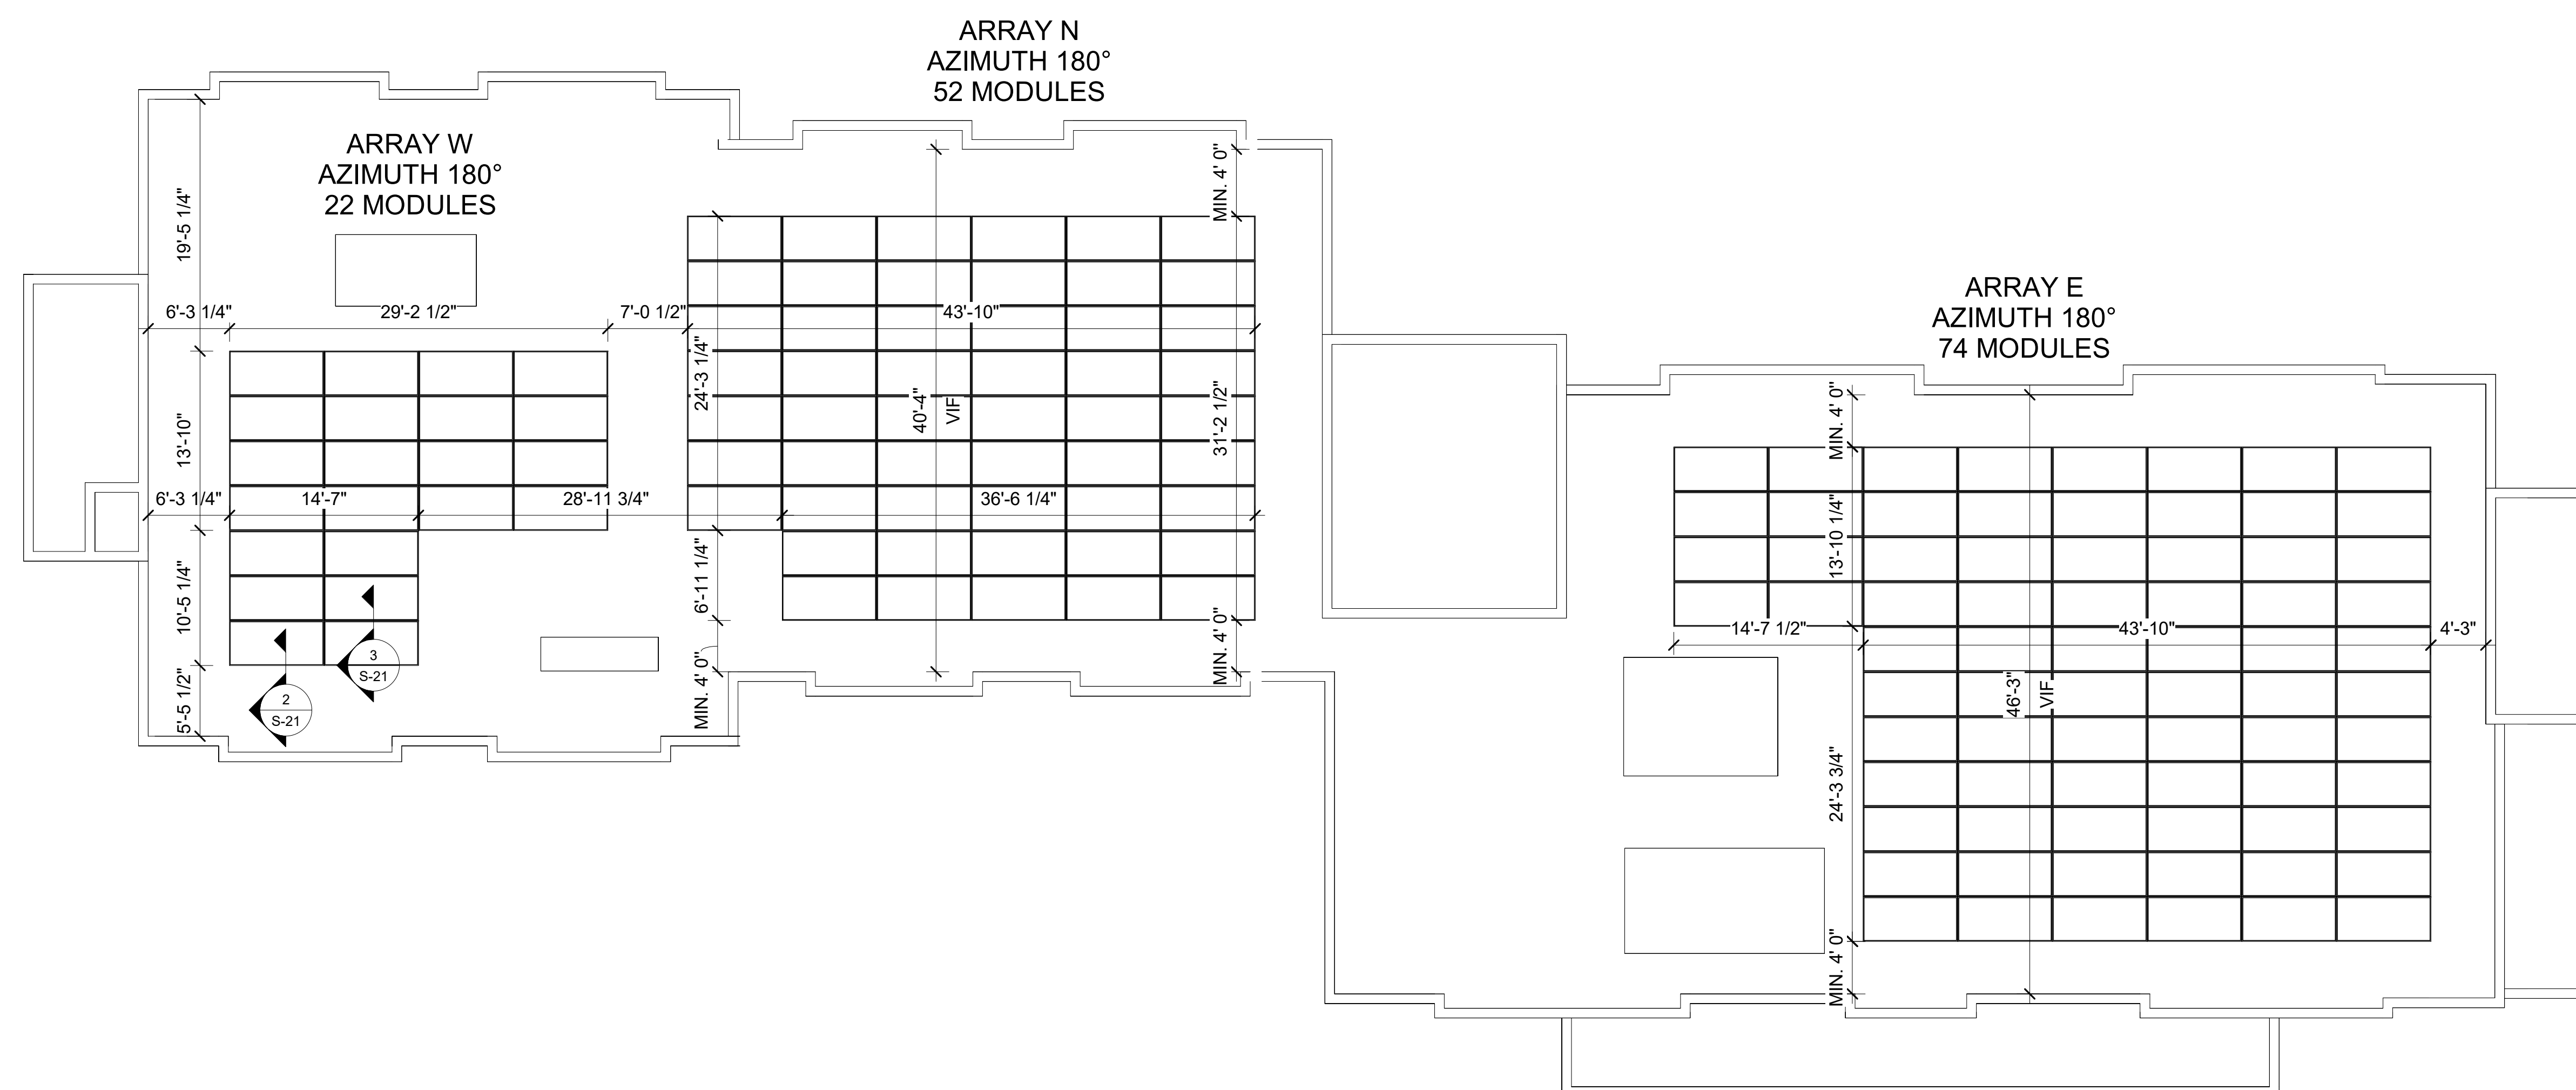

1 PANEL LAYOUT  
1/8" = 1'-0"

**TOTAL 148 MODULES**  
**QCELLS, Q.PEAK DUO XL-10.3/ BFG**  
**87.2 IN × 41.1 IN × 1.38 IN (INCLUDING FRAME)**  
**(2216 MM × 1045 MM × 35 MM)**




**UNIVERSAL**  
**RENEWABLES**  
ELEVATING SOLAR

LICENSE# 410519000079



[www.ksb-engineers.com](http://www.ksb-engineers.com)

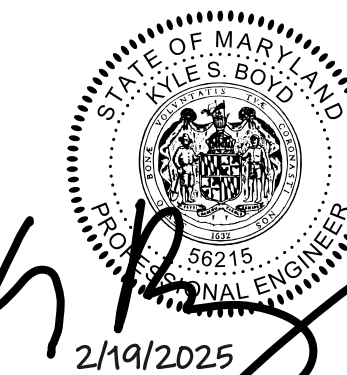
[illegible]

## POST LAYOUT

Karen Bunkin


**REVIEWED**  
By Devon.Murtha at 12:50 pm, Jun 02, 2025

-12

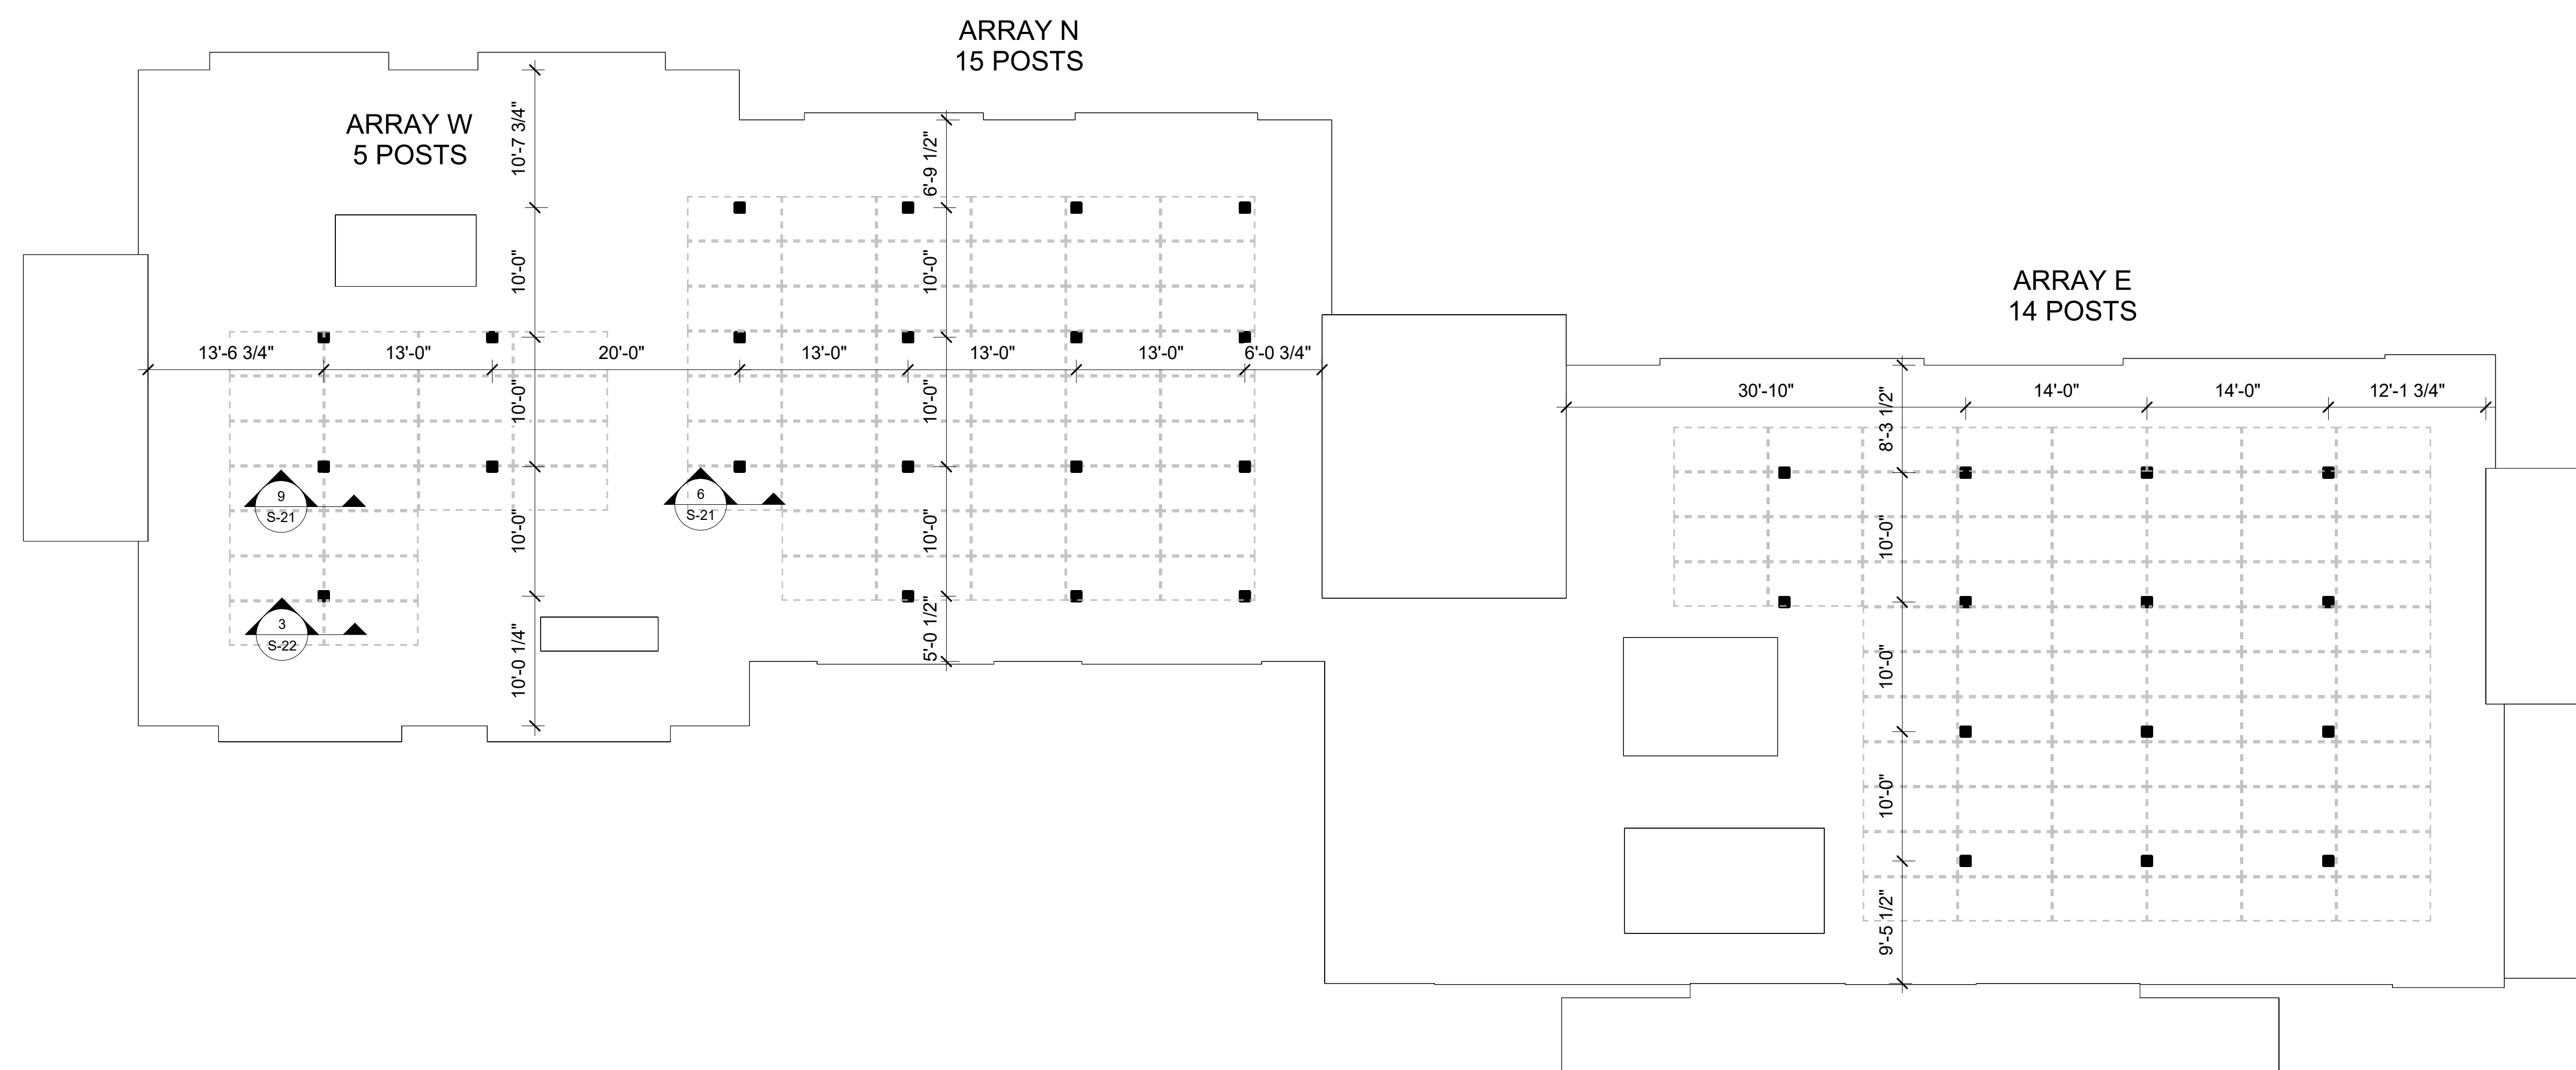

① POST LAYOUT  
 $\frac{1}{8}" = 1'-0"$

**TOTAL 34 POSTS ST4X3**

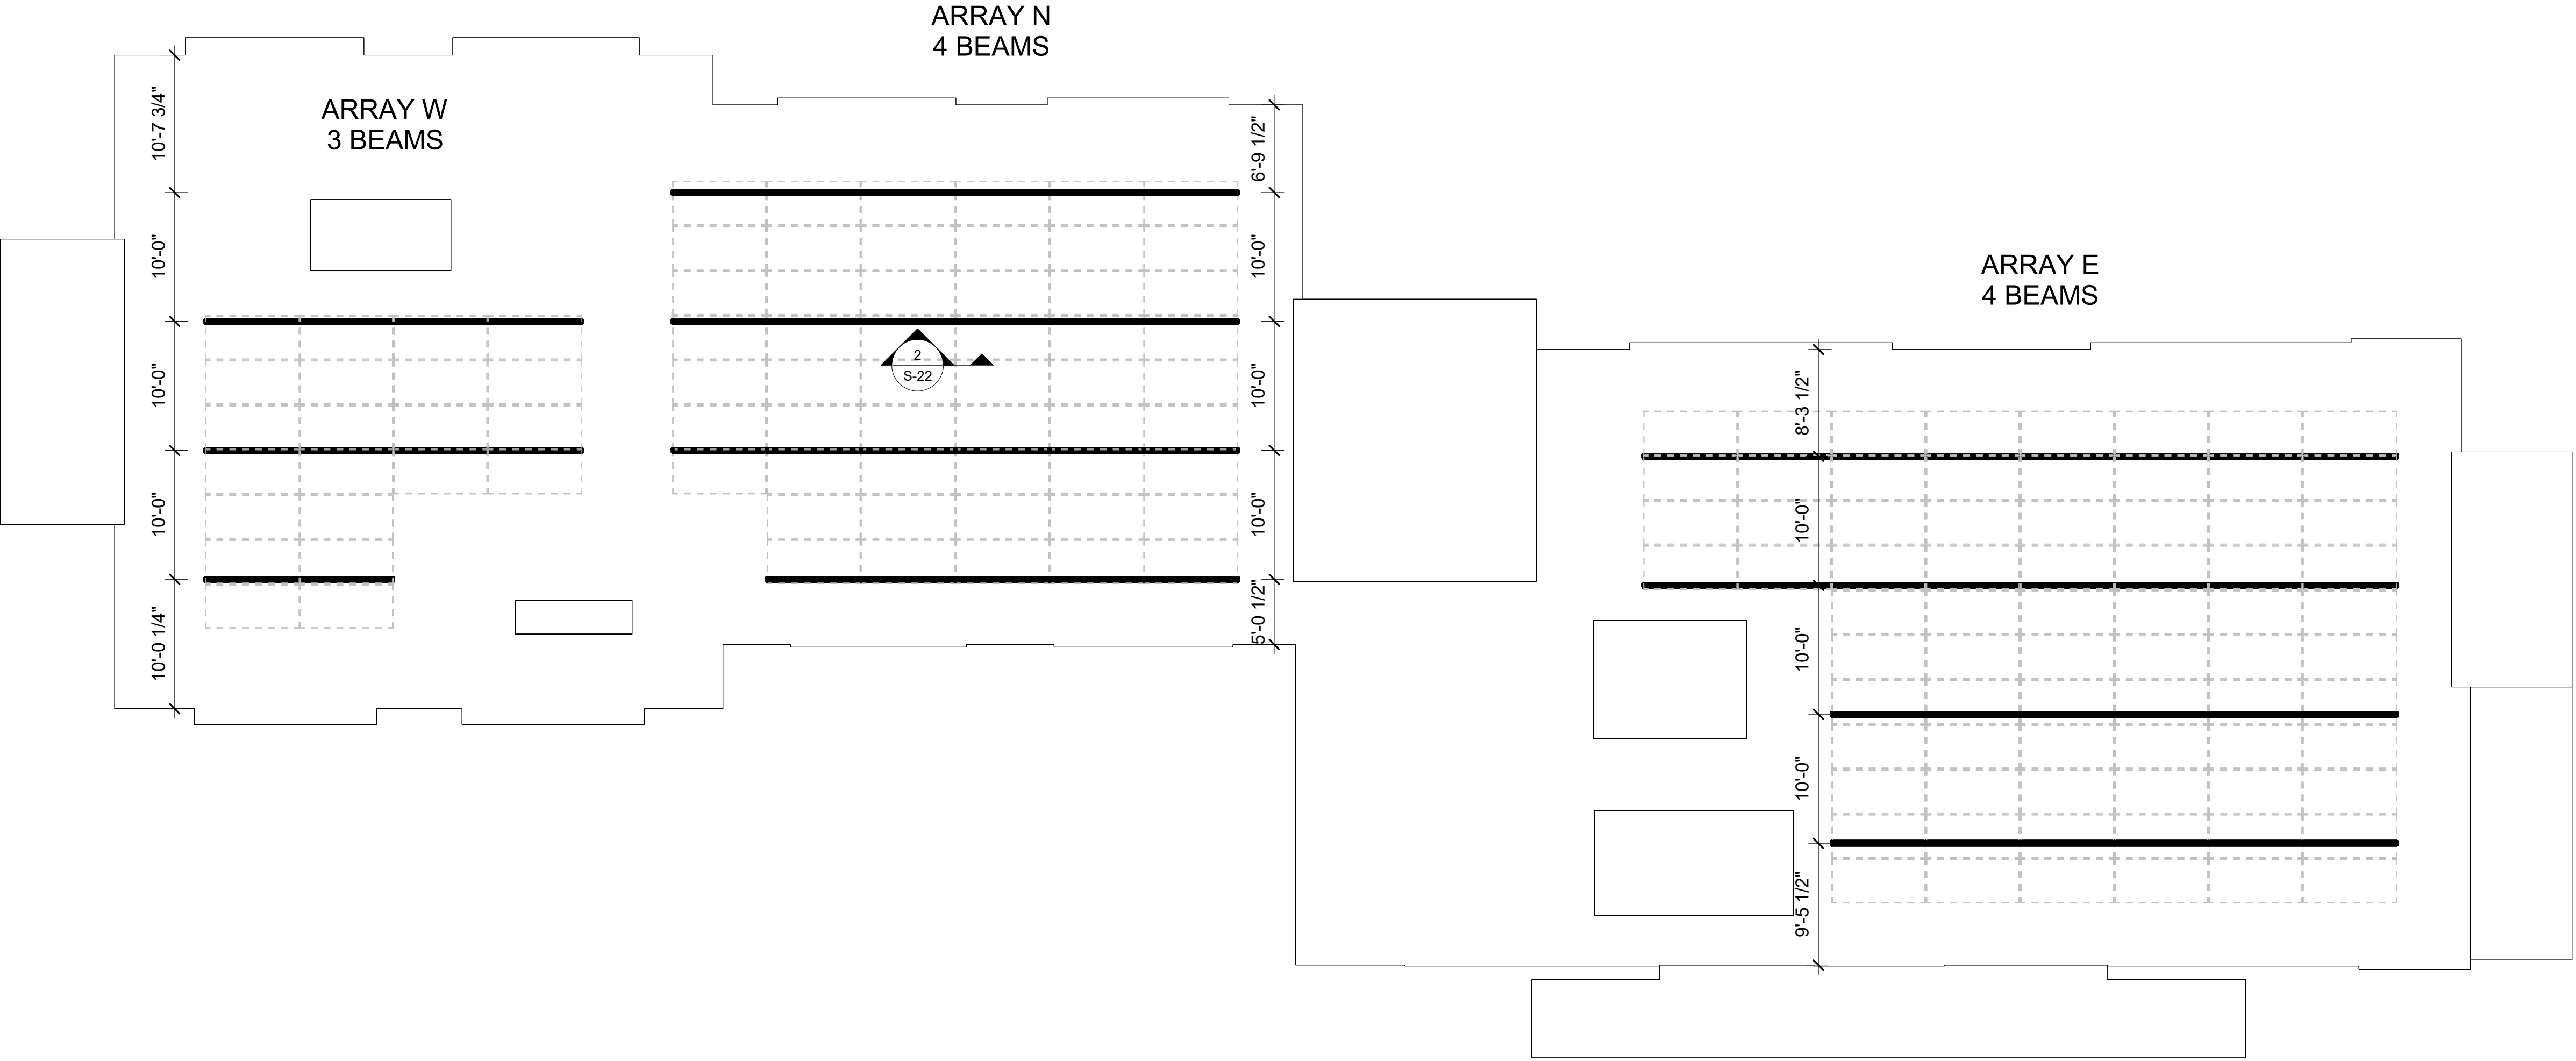

① BEAM LAYOUT  
1/8" = 1'-0"

TOTAL 11 BEAMS ST6X3

APPROVED  
Montgomery County  
Historic Preservation Commission  
*Karen B. Smith*

VV E

REVIEWED  
By Devon.Murtha at 12:50 pm, Jun 02, 2025

UNIVERSAL RENEWABLES  
3516 MASSACHUSETTS AVE NW  
WASHINGTON, DC 20007  
**UNIVERSAL**  
RENEWABLES  
ELEVATING SOLAR  
LICENSE# 410519000079

ENGINEER OF RECORD  
KSB STRUCTURAL ENGINEERING

**KSB**  
ENGINEERS  
www.ksb-engineers.com

STATE OF MARYLAND  
SEATTLE S. BOLLAND  
Professional Engineer  
No. 58215  
2/19/2025

NO.	ISSUE/REVISION DESCRIPTION	DATE
1	PERMIT	2/19/2025

NEW PV SYSTEM  
7051 CARROLL AVE.  
TAKOMA PARK, MD

BEAM FRAMING

S-13




**UNIVERSAL**  
**RENEWABLES**  
ELEVATING SOLAR

LICENSE# 410519000079




[www.ksb-engineers.com](http://www.ksb-engineers.com)

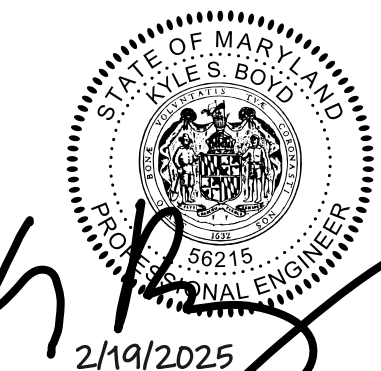[illegible]

## BRACE FRAMING

S-14

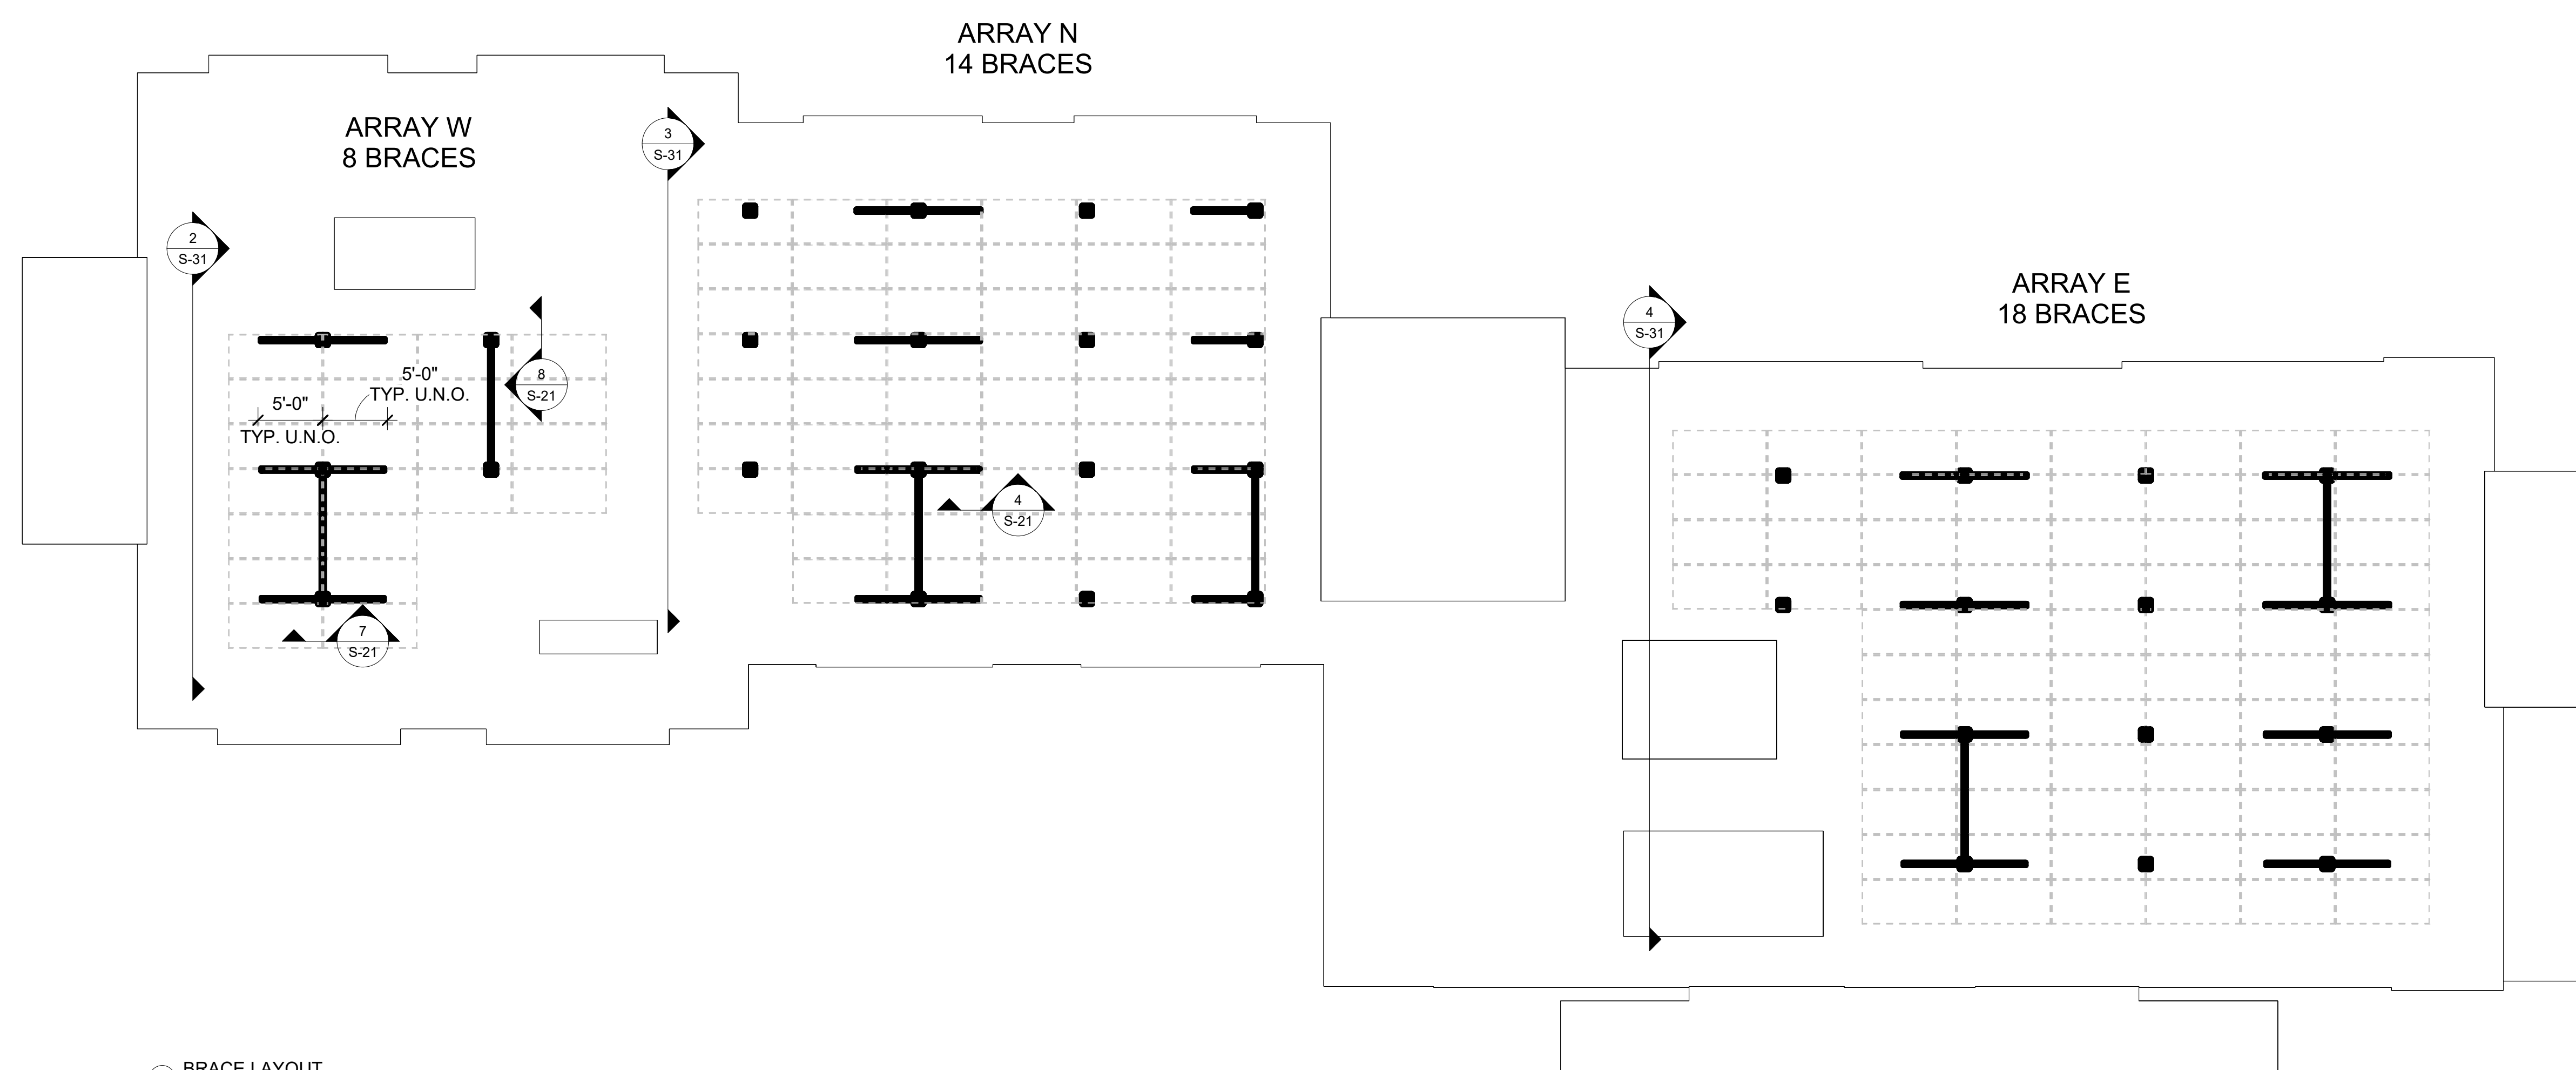

① BRACE LAYOUT  
1/8" = 1'-0"


**TOTAL 36 BRACES ST3X2**

APPROVED

Montgomery County

Historic Preservation Commission

*Karen Benoit*



**REVIEWED**  
By Devon.Murtha at 12:50 pm, Jun 02, 2025





**UNIVERSAL**  
**RENEWABLES**  
ELEVATING SOLAR

LICENSE# 410519000079



**KSB**  
**ENGINEERS**

[www.ksb-engineers.com](http://www.ksb-engineers.com)




KR  
2/19/2025

[illegible]

NEW PV SYSTEM  
7051 CARROLL AVE.  
TAKOMA PARK, MD

## STRINGER FRAMING

S-15

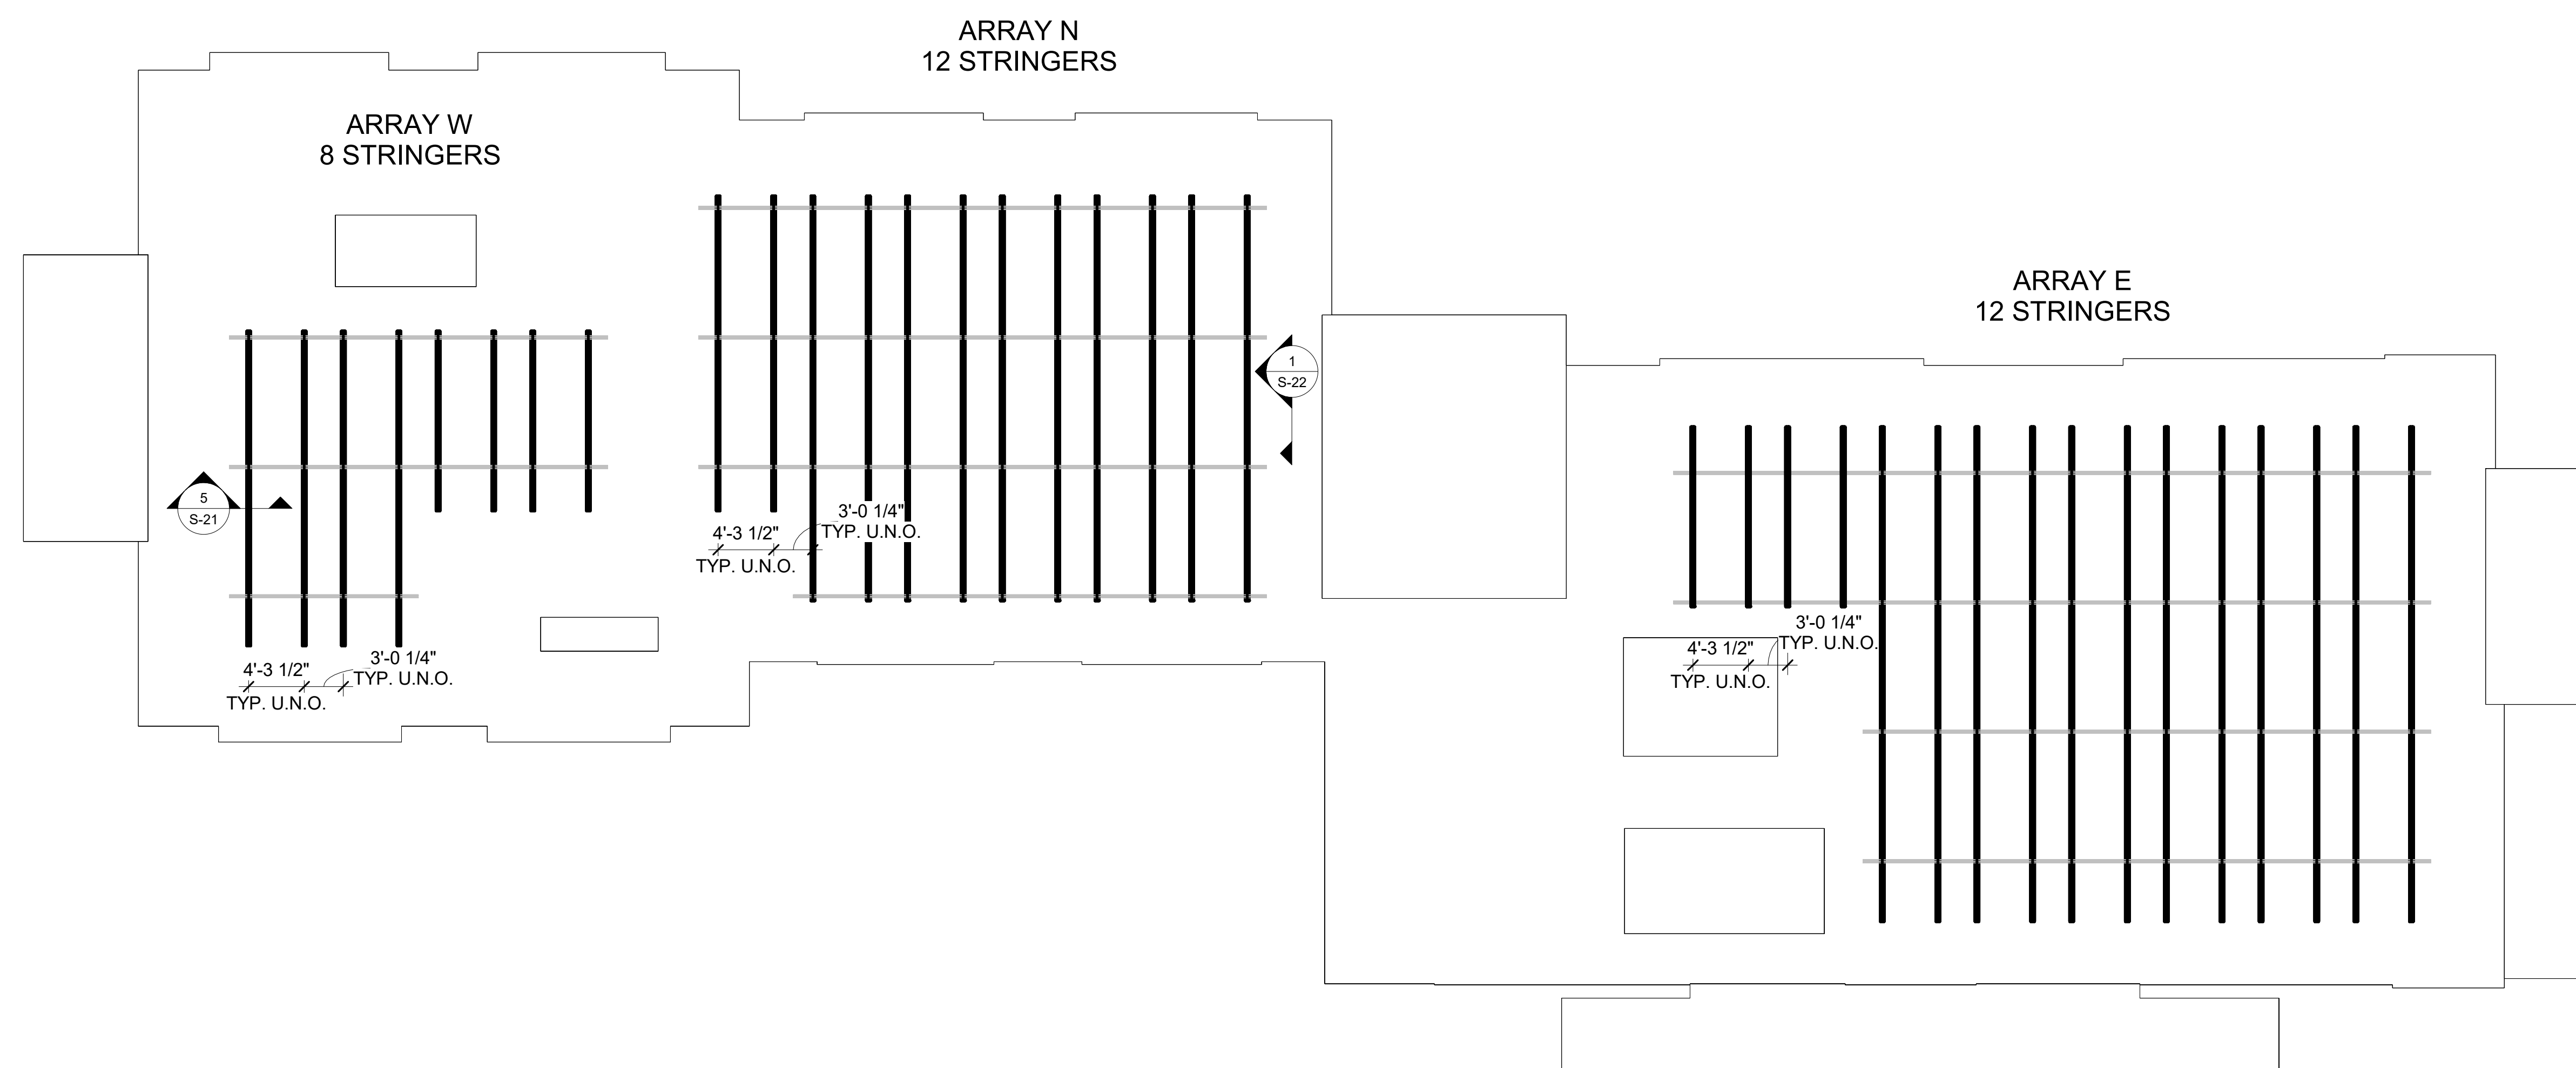

1 STRINGER LAYOUT  
1/8" = 1'-0"


**TOTAL 32 STRINGERS ST4X3**

APPROVED

Montgomery County

Historic Preservation Commission


*Karen Benoit*

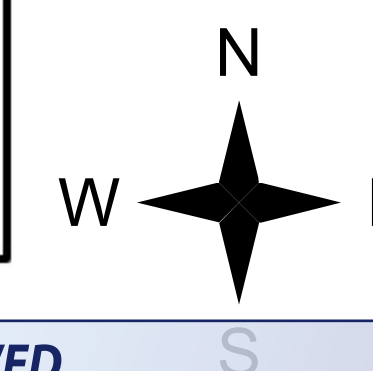

**REVIEWED** S  
By Devon.Murtha at 12:50 pm, Jun 02, 2025




**REVIEWED**  
By Devon.Murtha at 12:50 pm, Jun 02, 2025

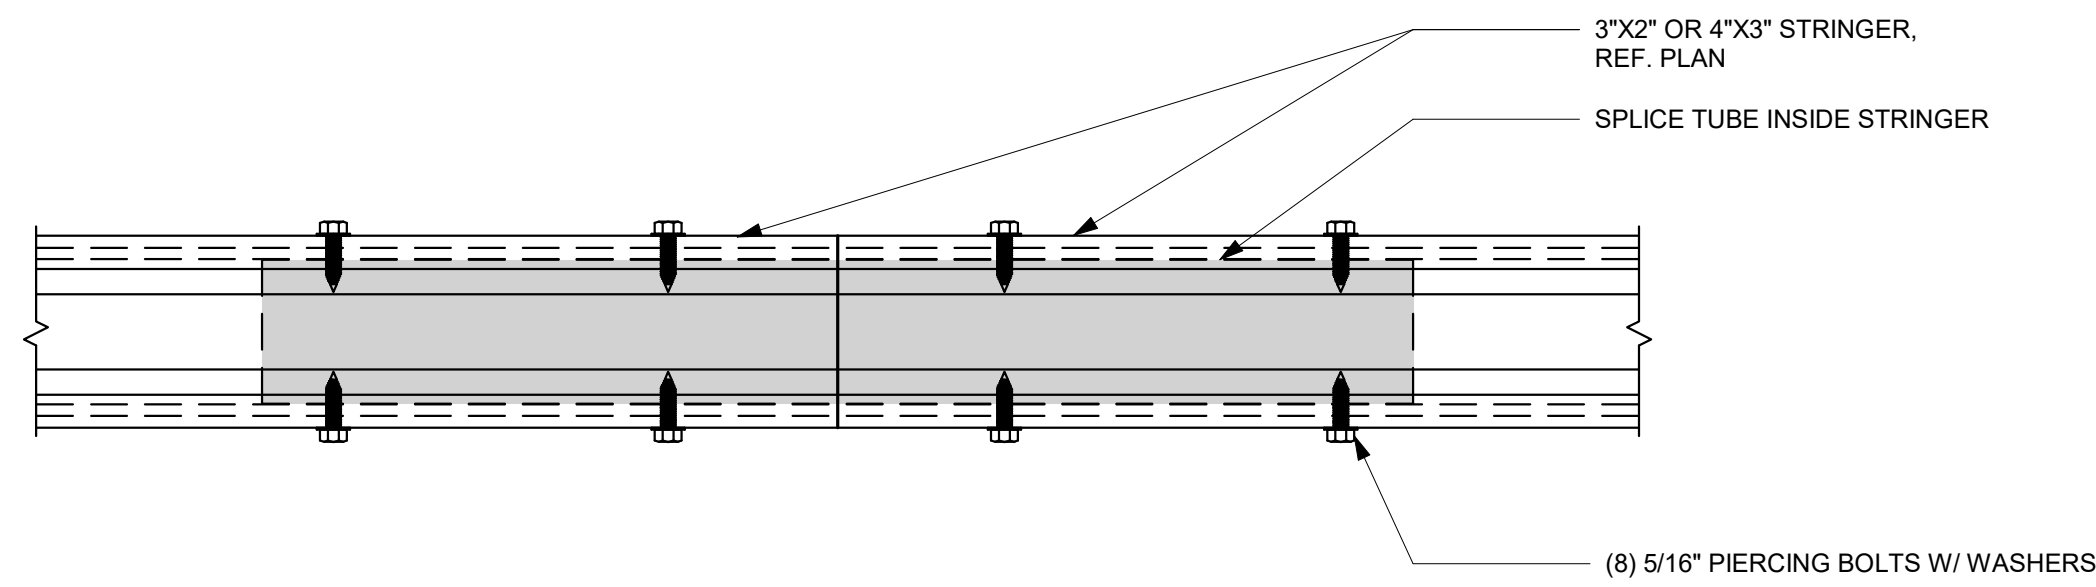


NOTE:  
ALL SPLICES SHALL OCCUR AT 2FT (+/- 6" INCHES) FROM THE SUPPORT BEAM.  
SPLICES SHALL NOT OCCUR AT CANTILEVERS OR ANY OTHER LOCATION WITHOUT EOR APPROVAL.

① STRINGER SPLICE  
3" = 1'-0"

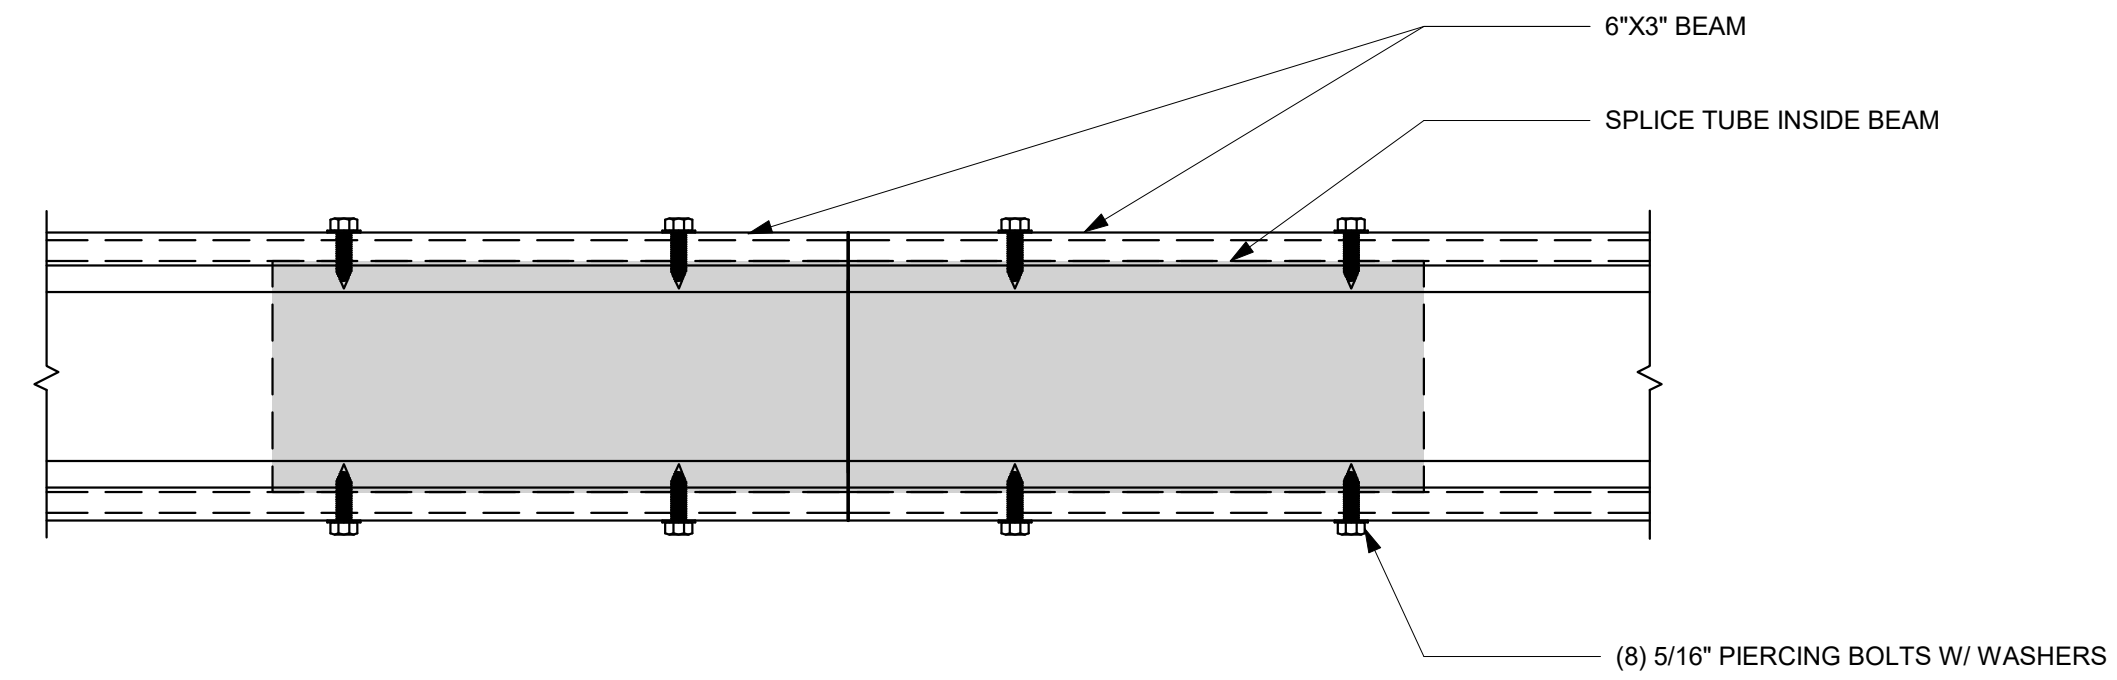

NOTE:  
ALL SPLICES SHALL OCCUR AT 2FT (+/- 1 FT) FROM THE SUPPORT POST LOCATIONS.  
SPLICES SHALL NOT OCCUR AT CANTILEVERS OR ANY OTHER LOCATION WITHOUT EOR APPROVAL.

② BEAM SPLICE  
3" = 1'-0"

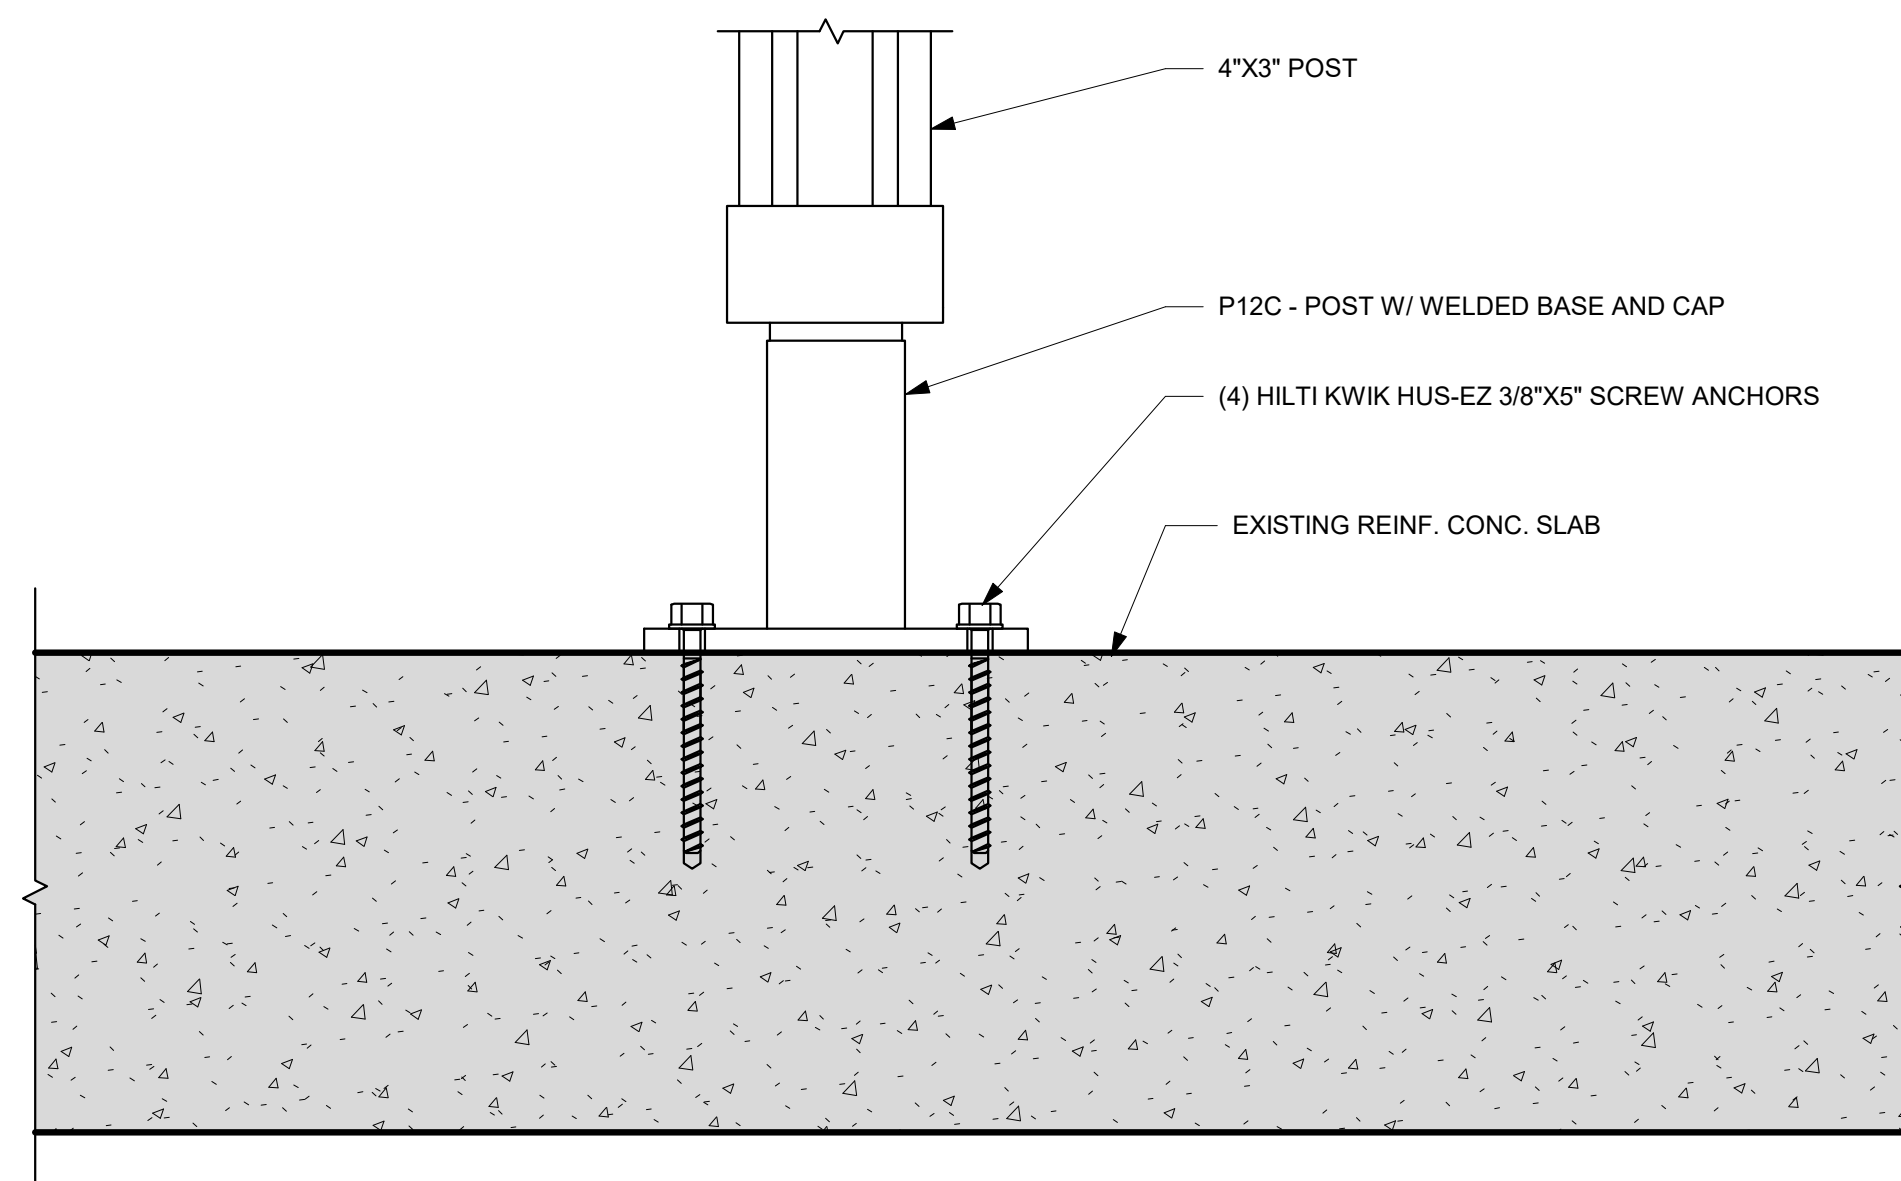

③ BASE ASSEMBLY TO ROOF CONNECTION  
3" = 1'-0"

APPROVED  
Montgomery County  
Historic Preservation Commission  
*Karen Bulleit*

REVIEWED  
By Devon.Murtha at 12:50 pm, Jun 02, 2025

UNIVERSAL RENEWABLES  
3516 MASSACHUSETTS AVE NW  
WASHINGTON, DC 20007  
**UNIVERSAL**  
RENEWABLES  
ELEVATING SOLAR  
LICENSE# 410519000079

ENGINEER OF RECORD  
KSB STRUCTURAL ENGINEERING

**KSB**  
ENGINEERS  
www.ksb-engineers.com

STATE OF MARYLAND  
KAREN BULLEIT  
2/19/2025  
Professional Engineer





NO.	ISSUE/REVISION DESCRIPTION	DATE	PERMIT	DATE	PERMIT	DATE	PERMIT	DATE	PERMIT	DATE	PERMIT	DATE	PERMIT	DATE	PERMIT
1		2/19/2025													

NEW PV SYSTEM  
7051 CARROLL AVE.  
TAKOMA PARK, MD

DETAILS

S-22



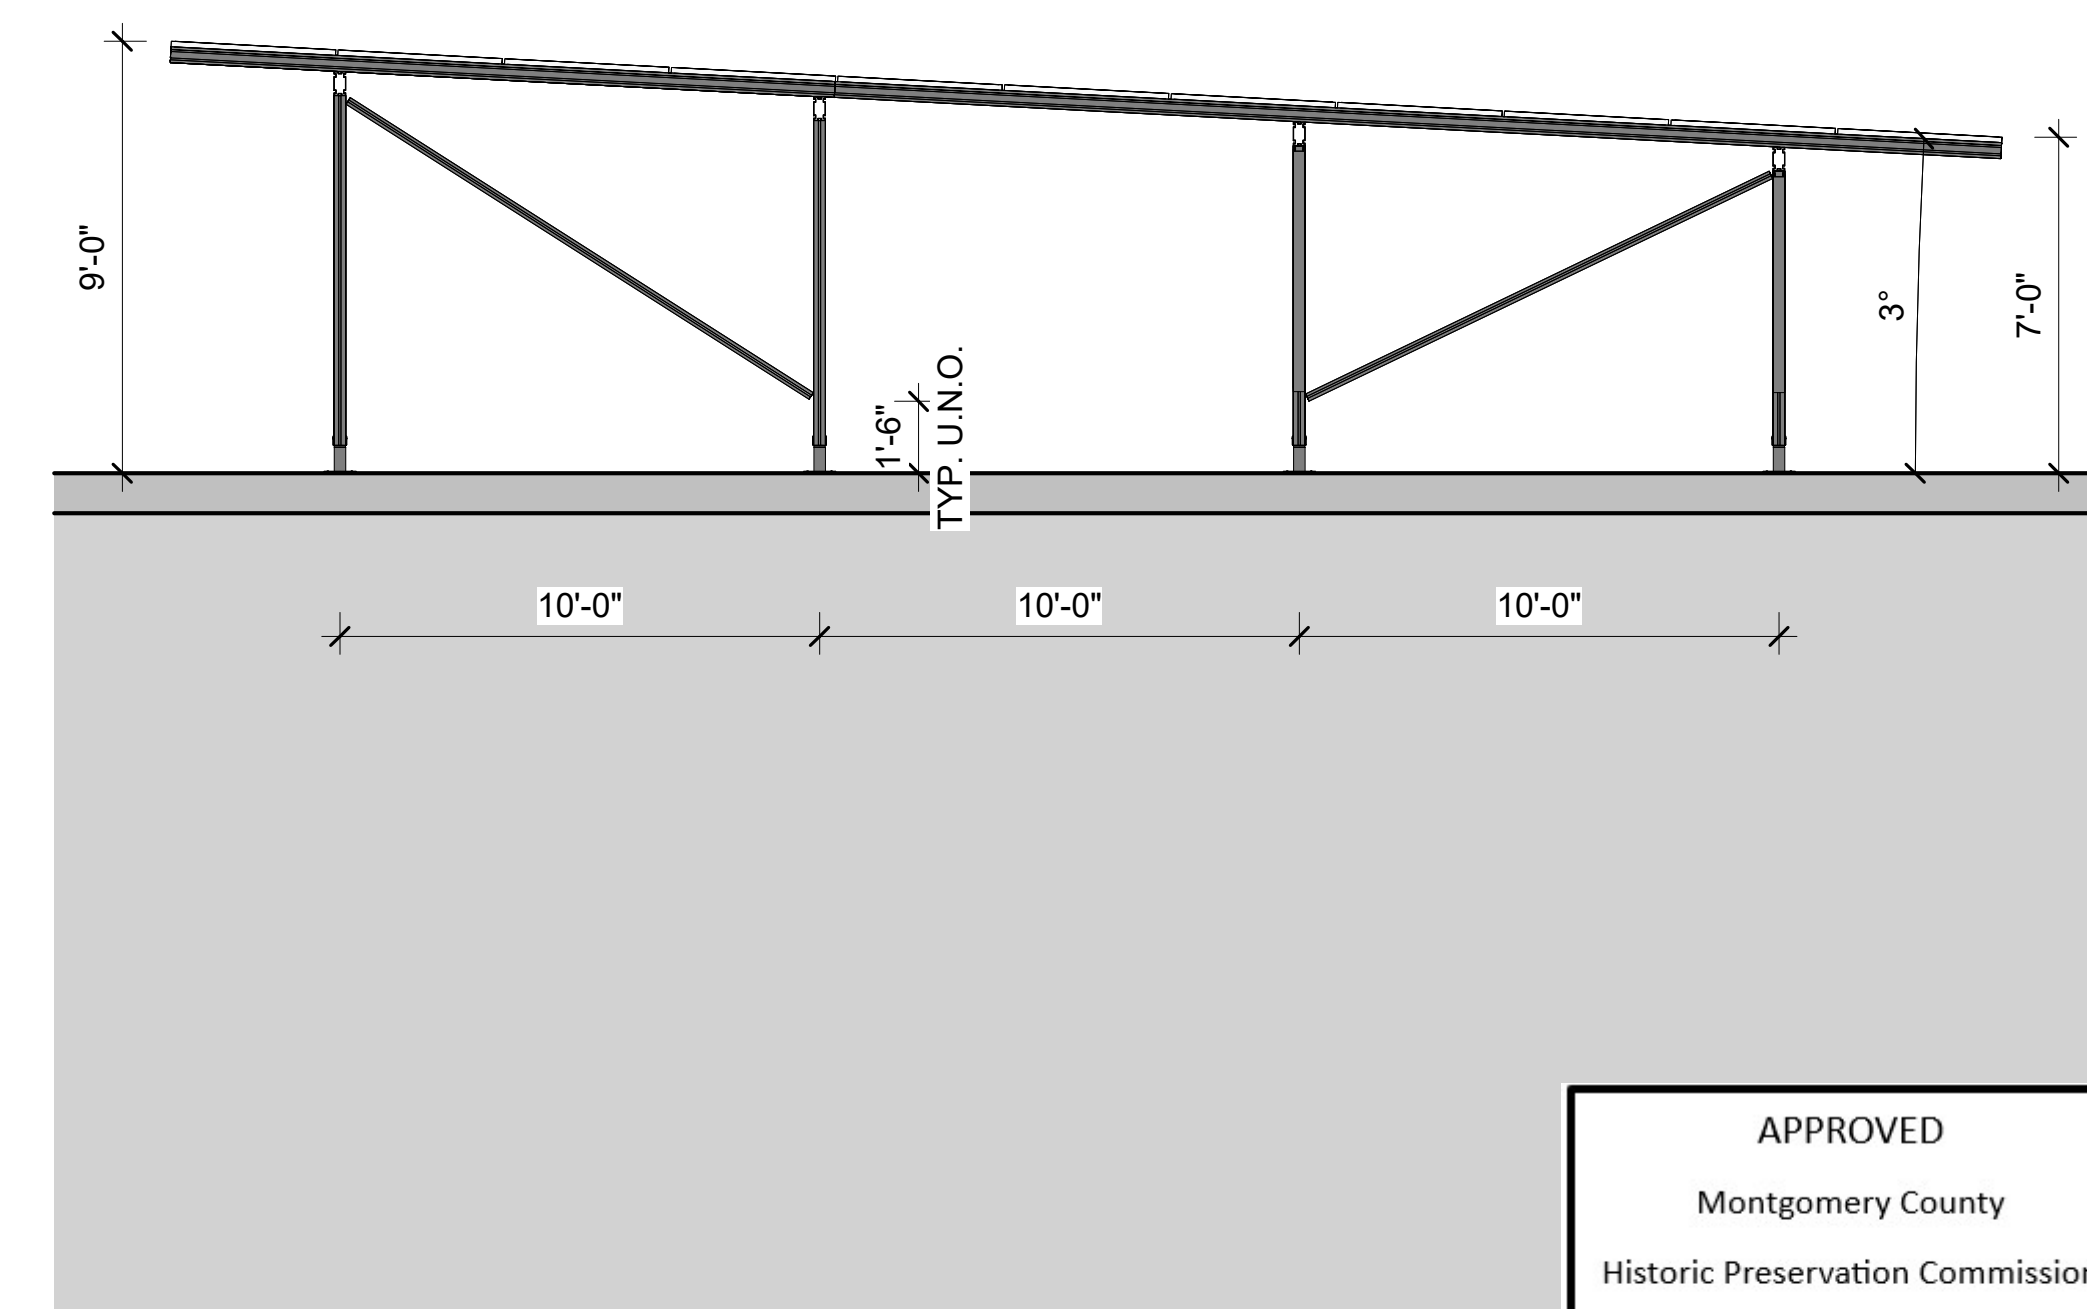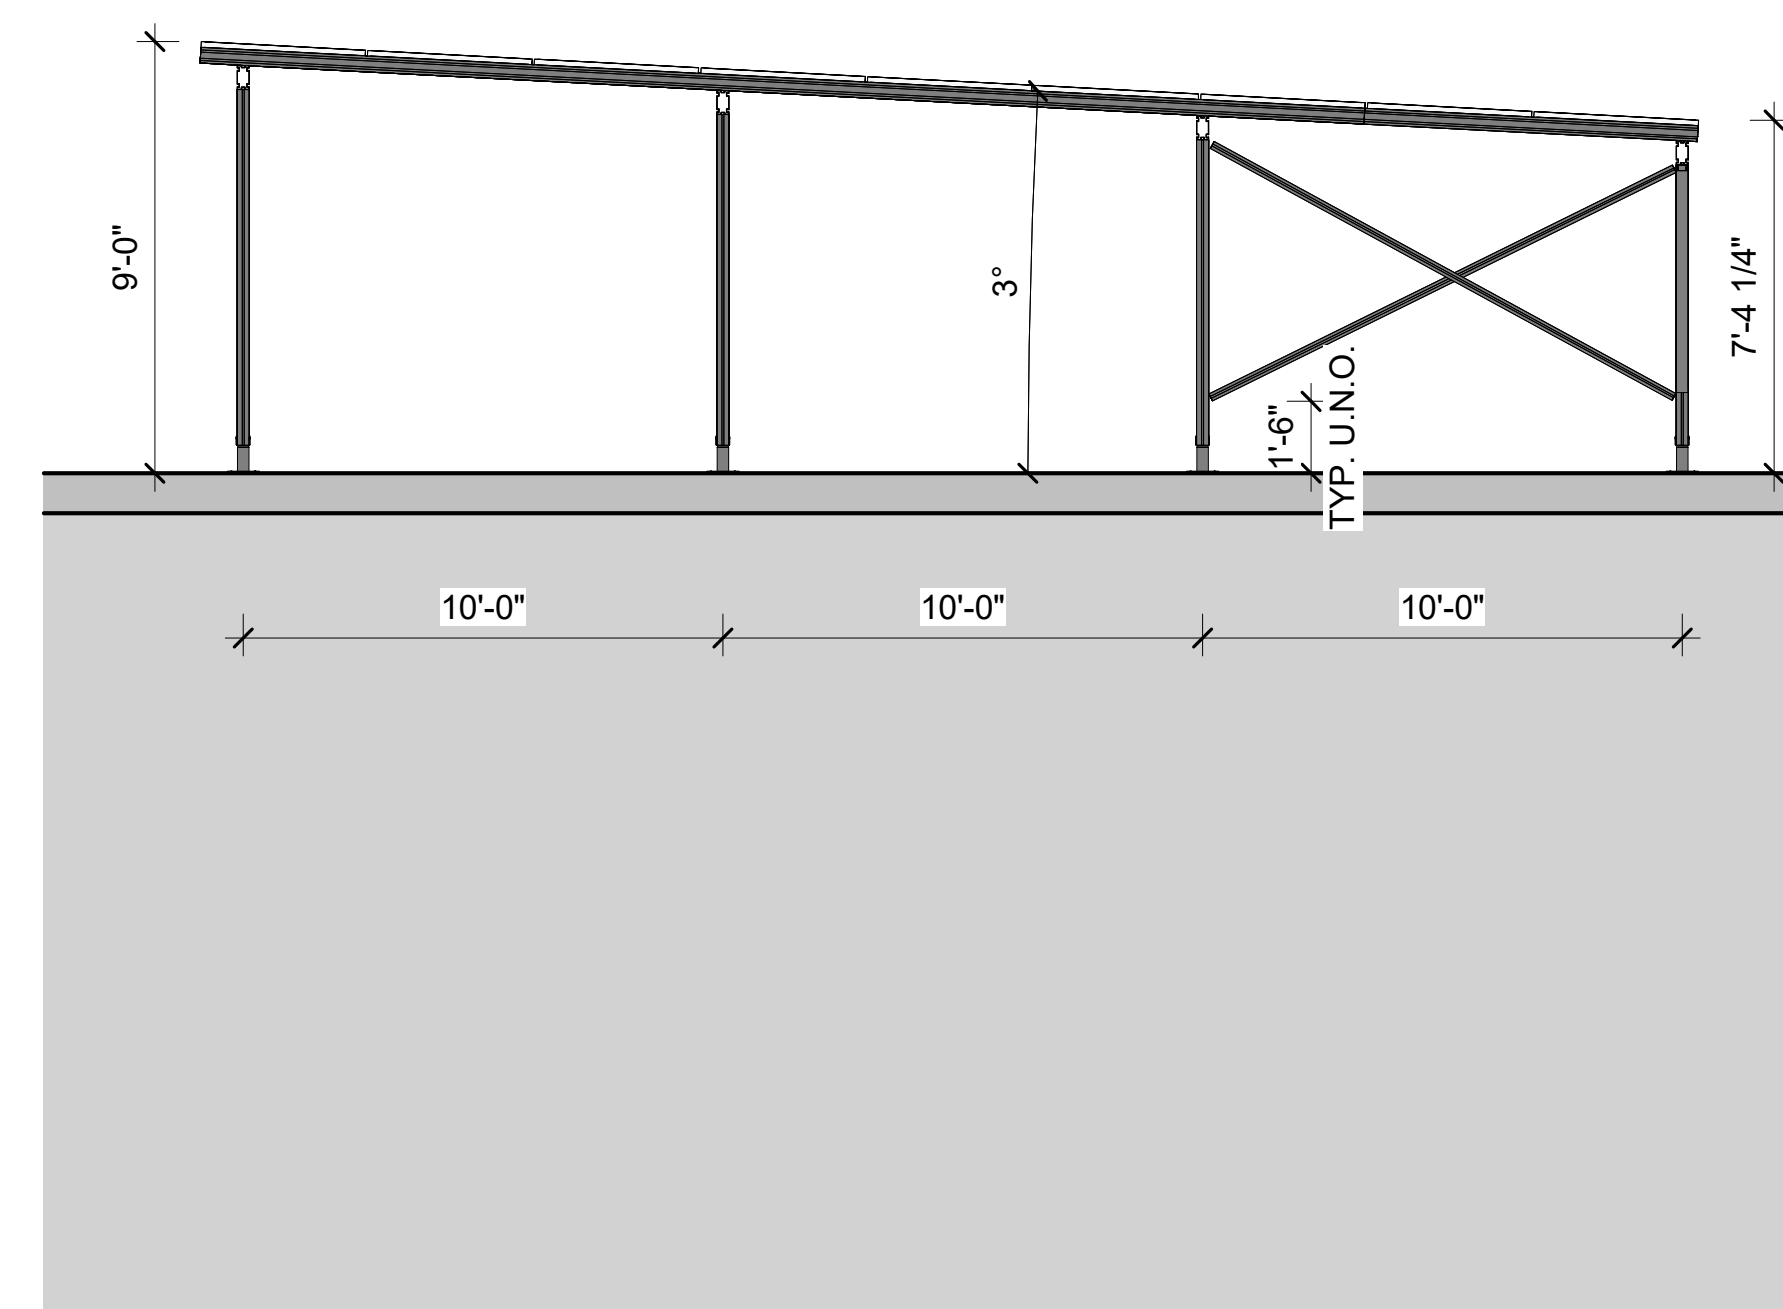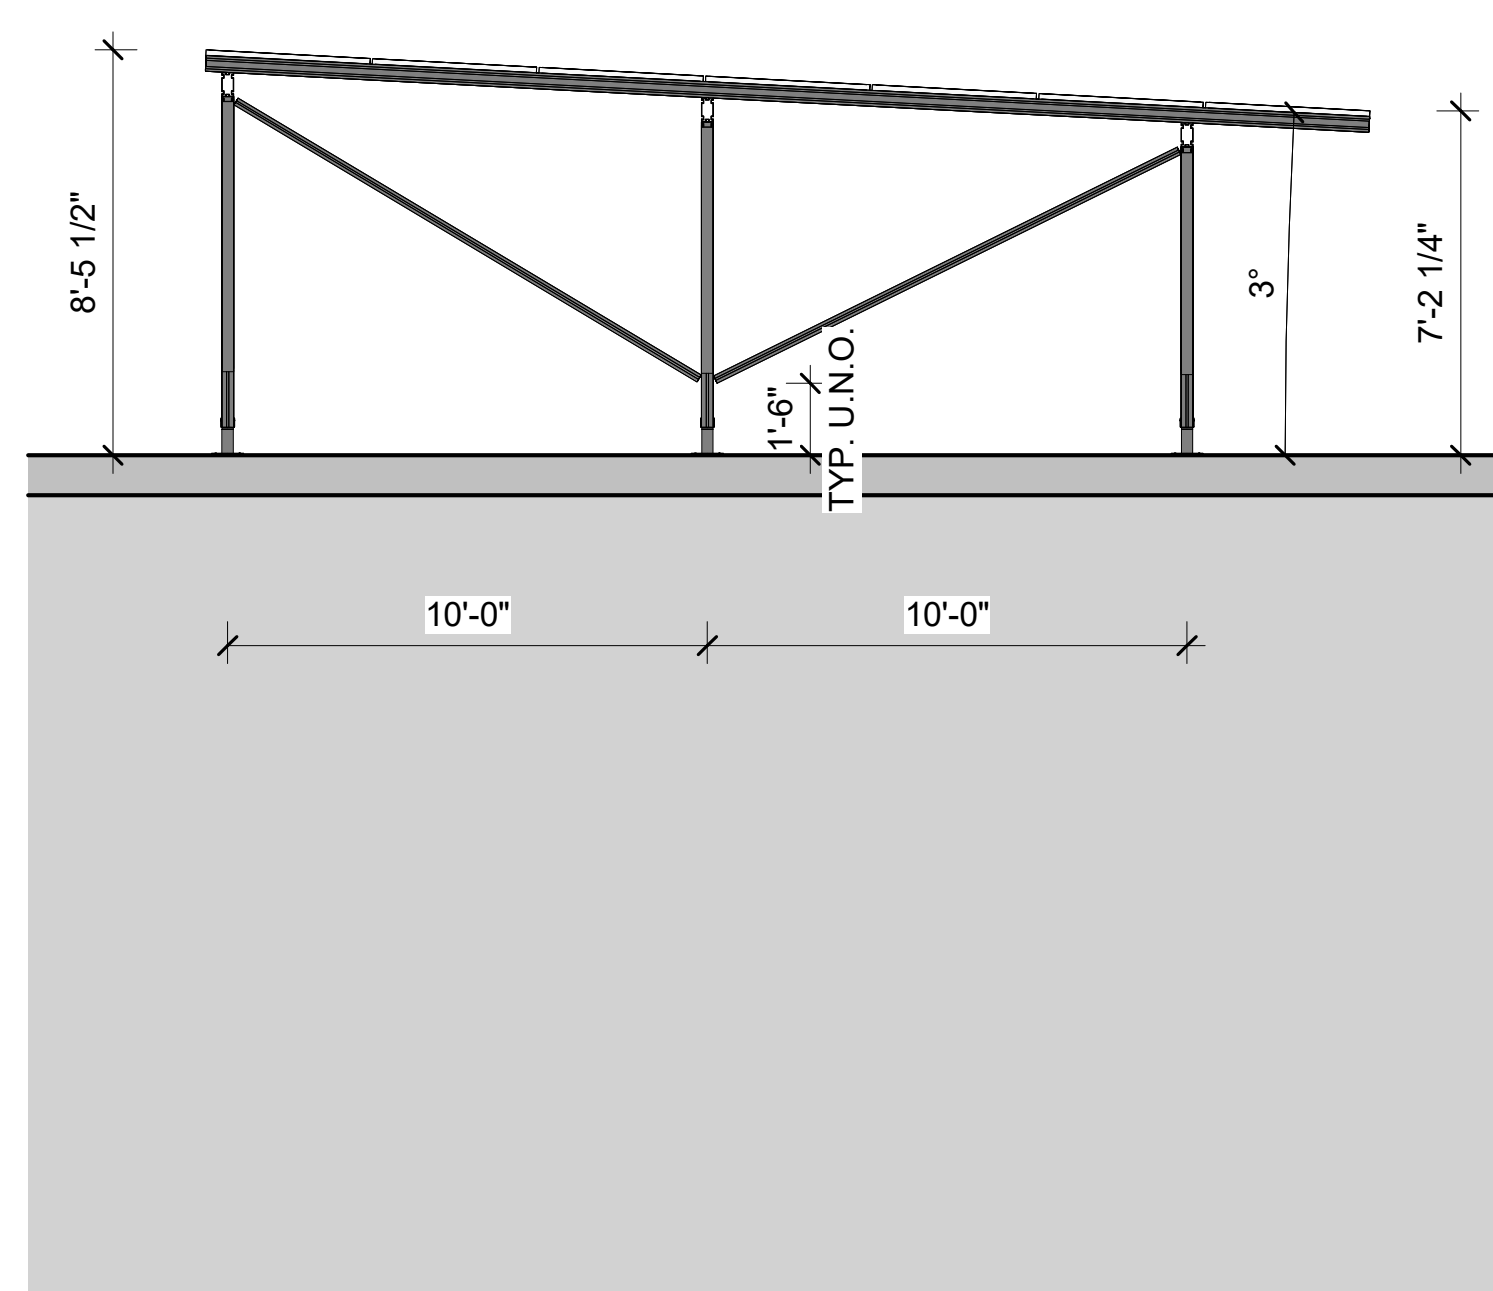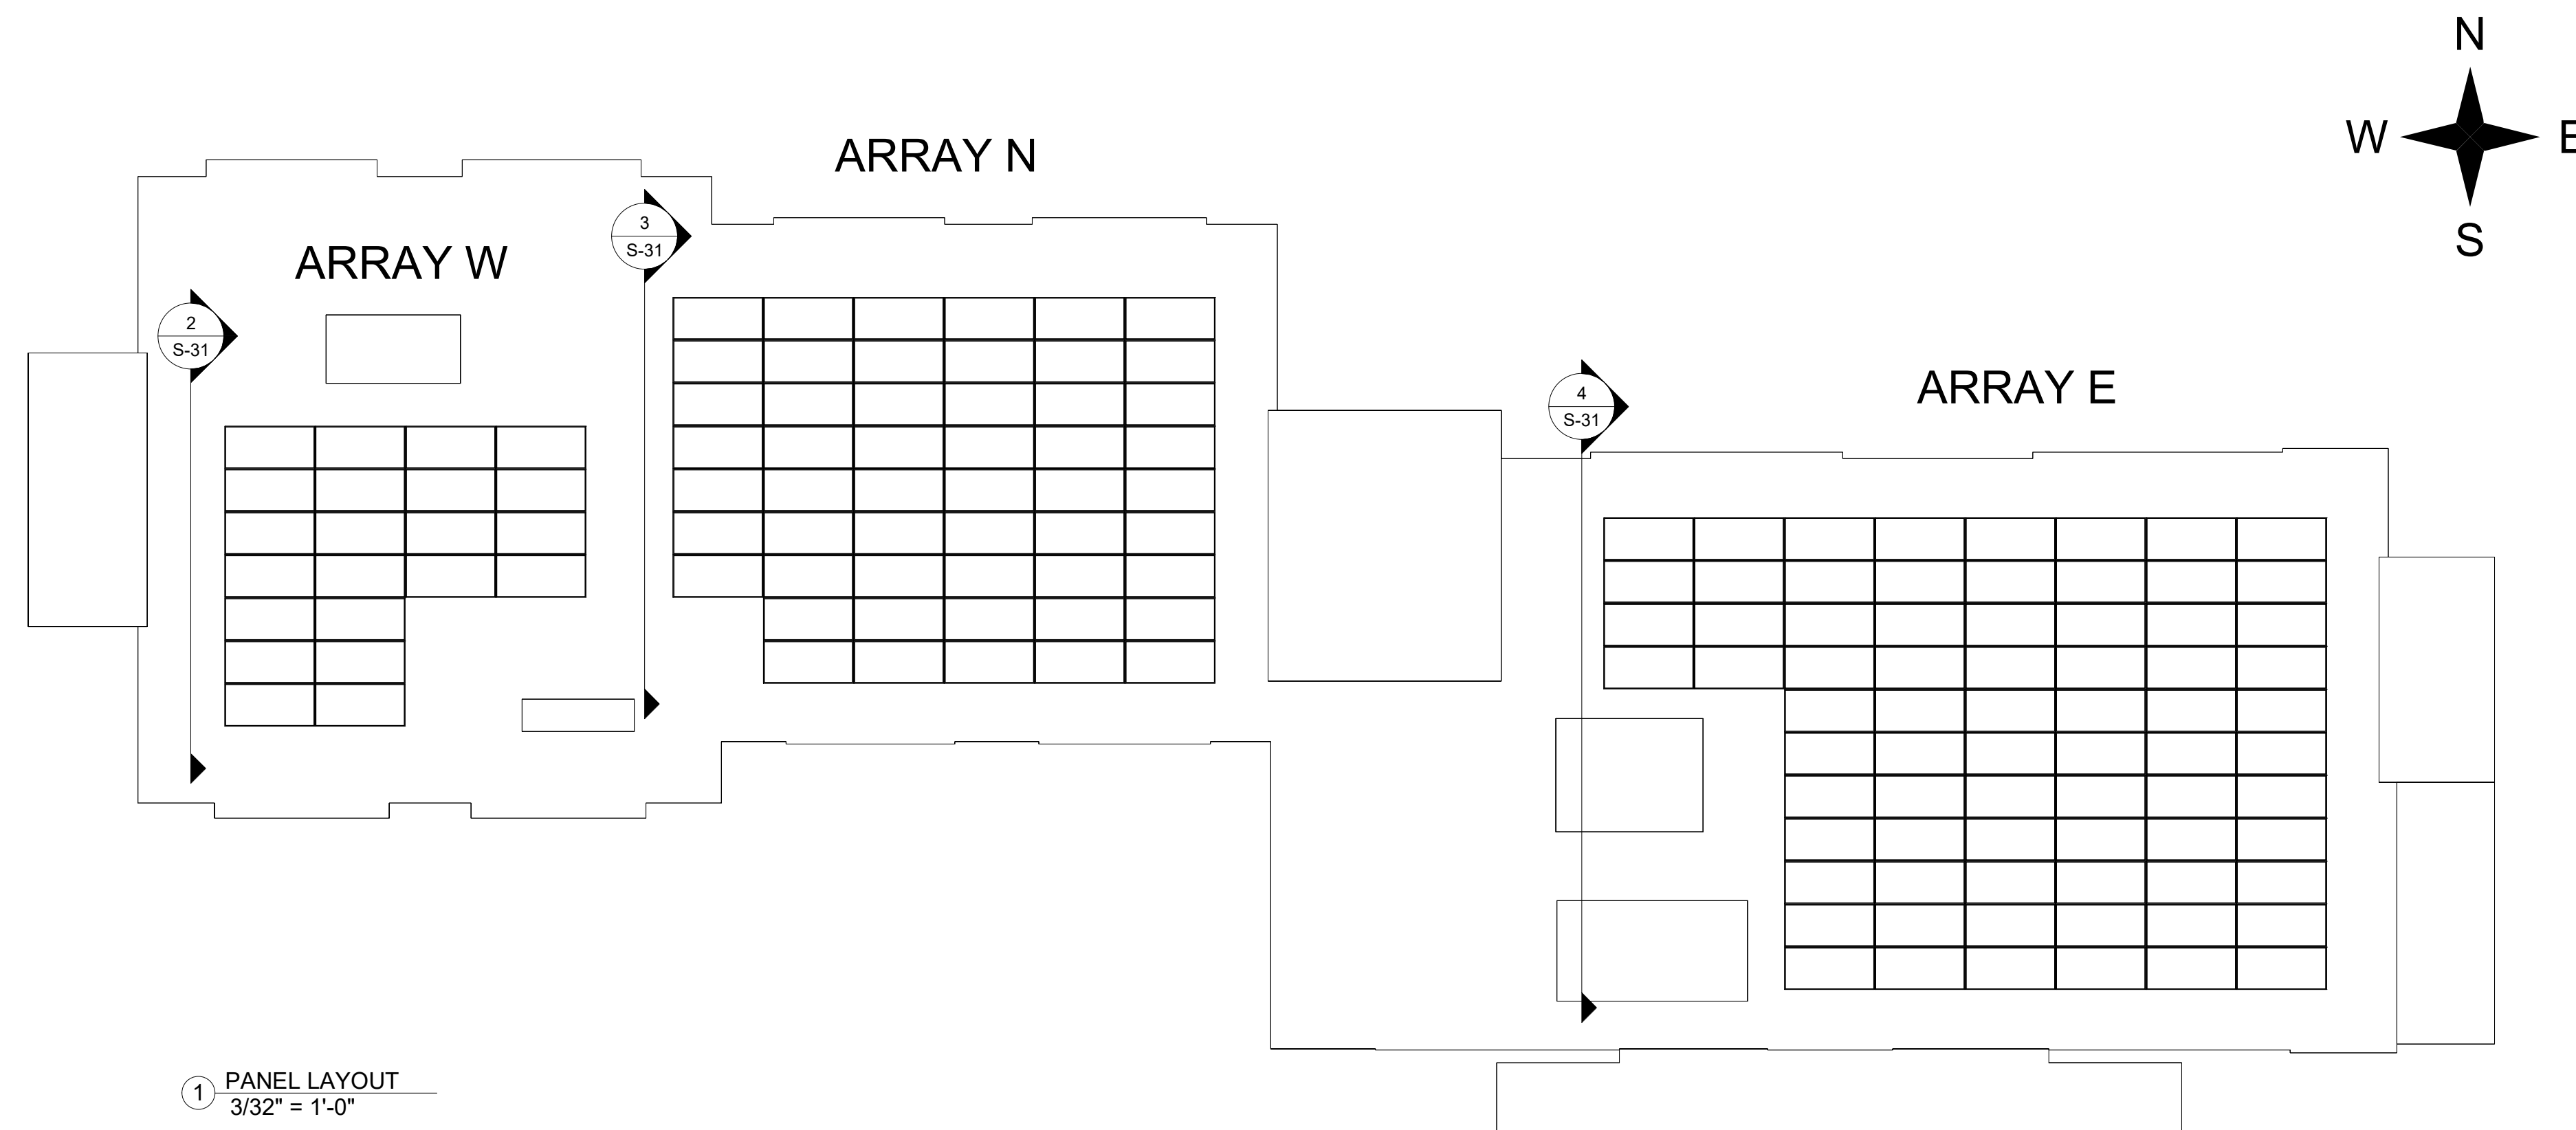

APPROVED

Montgomery County


Historic Preservation Commission

*Karen Benoit*

**REVIEWED**  
By Devon.Murtha at 12:50 pm, Jun 02, 2025




ENGINEER OF RECORD  
KSB STRUCTURAL ENGINEERING

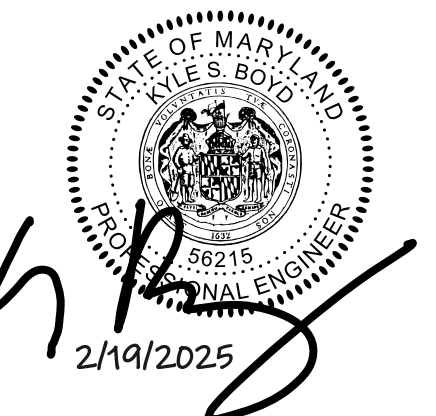[illegible]

NEW PV SYSTEM  
7051 CARROLL AVE.  
TAKOMA PARK, MD


## ELEVATIONS

S-31

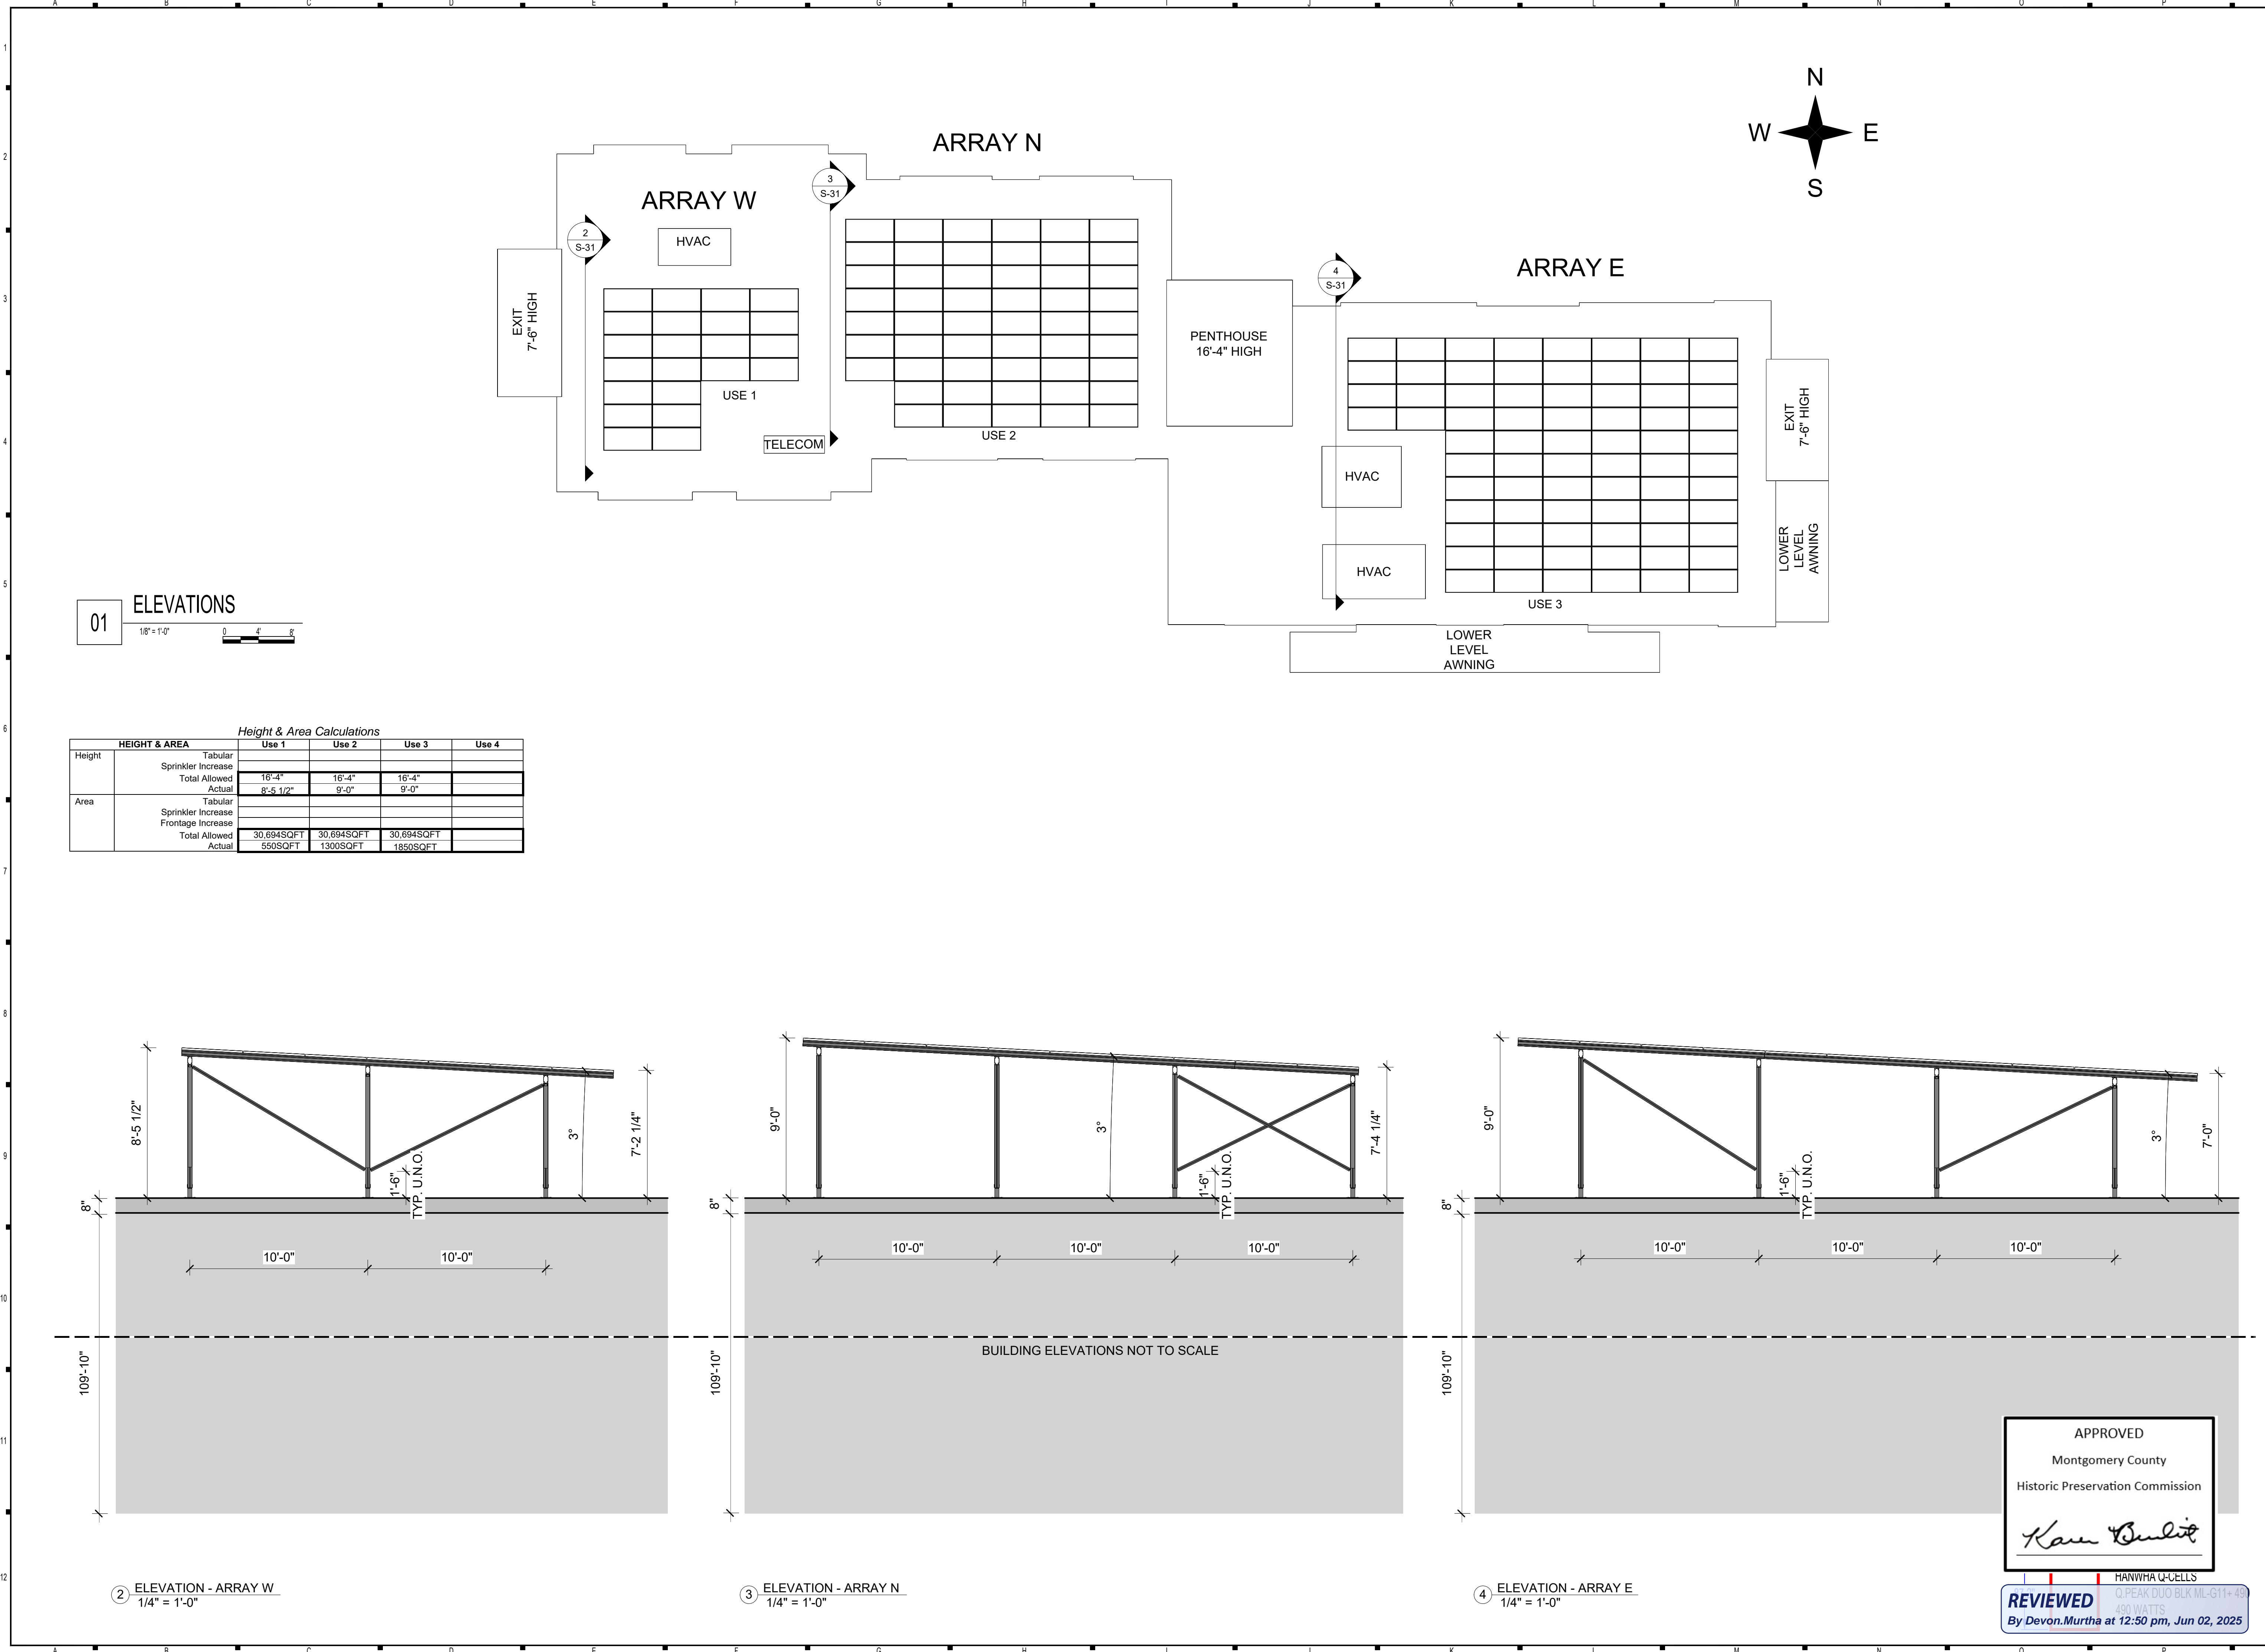

01 ELEVATIONS  
1/8" = 1'-0"

Height & Area Calculations					
HEIGHT & AREA		Use 1	Use 2	Use 3	Use 4
Height	Tabular				
	Sprinkler Increase				
	Total Allowed	16'-4"	16'-4"	16'-4"	
Area	Actual	8'-5 1/2"	9'-0"	9'-0"	
	Tabular				
	Sprinkler Increase				
Frontage Increase	Total Allowed	30,694SQFT	30,694SQFT	30,694SQFT	
	Actual	550SQFT	1300SQFT	1850SQFT	



UNIVERSAL  
RENEWABLES  
ELEVATING SOLAR

CONTRACTOR  
UNIVERSAL RENEWABLES  
ADDRESS: 3516 MASSACHUSETTS AVE NW WASHINGTON, DC 20007  
PHONE: 202.956.8565  
LIC. NO:

REVISION / RELEASE

NO.	DESCRIPTION	DATE

PROJECT

NEW PV SYSTEM: 72.520 kWp

VICTORY TOWER

7051 CARROLL AVENUE, TAKOMA PARK, MD 20912  
APN: 01072074


ENGINEER OF RECORD

PAPER SIZE: 36" x 24" (ARCH D)

SHEET TITLE: ELEVATIONS


DATE: 11.07.2024  
DESIGN BY: V.G.  
CHECKED BY: M.M.  
SHEET NUMBER: Z-001

APPROVED  
Montgomery County  
Historic Preservation Commission

  
KAREN BULLEIT

REVIEWED  
By Devon.Murtha at 12:50 pm, Jun 02, 2025

HANWHA Q-CELLS  
Q PEAK DUO BLK ML-G11+ 40  
490 WATTS

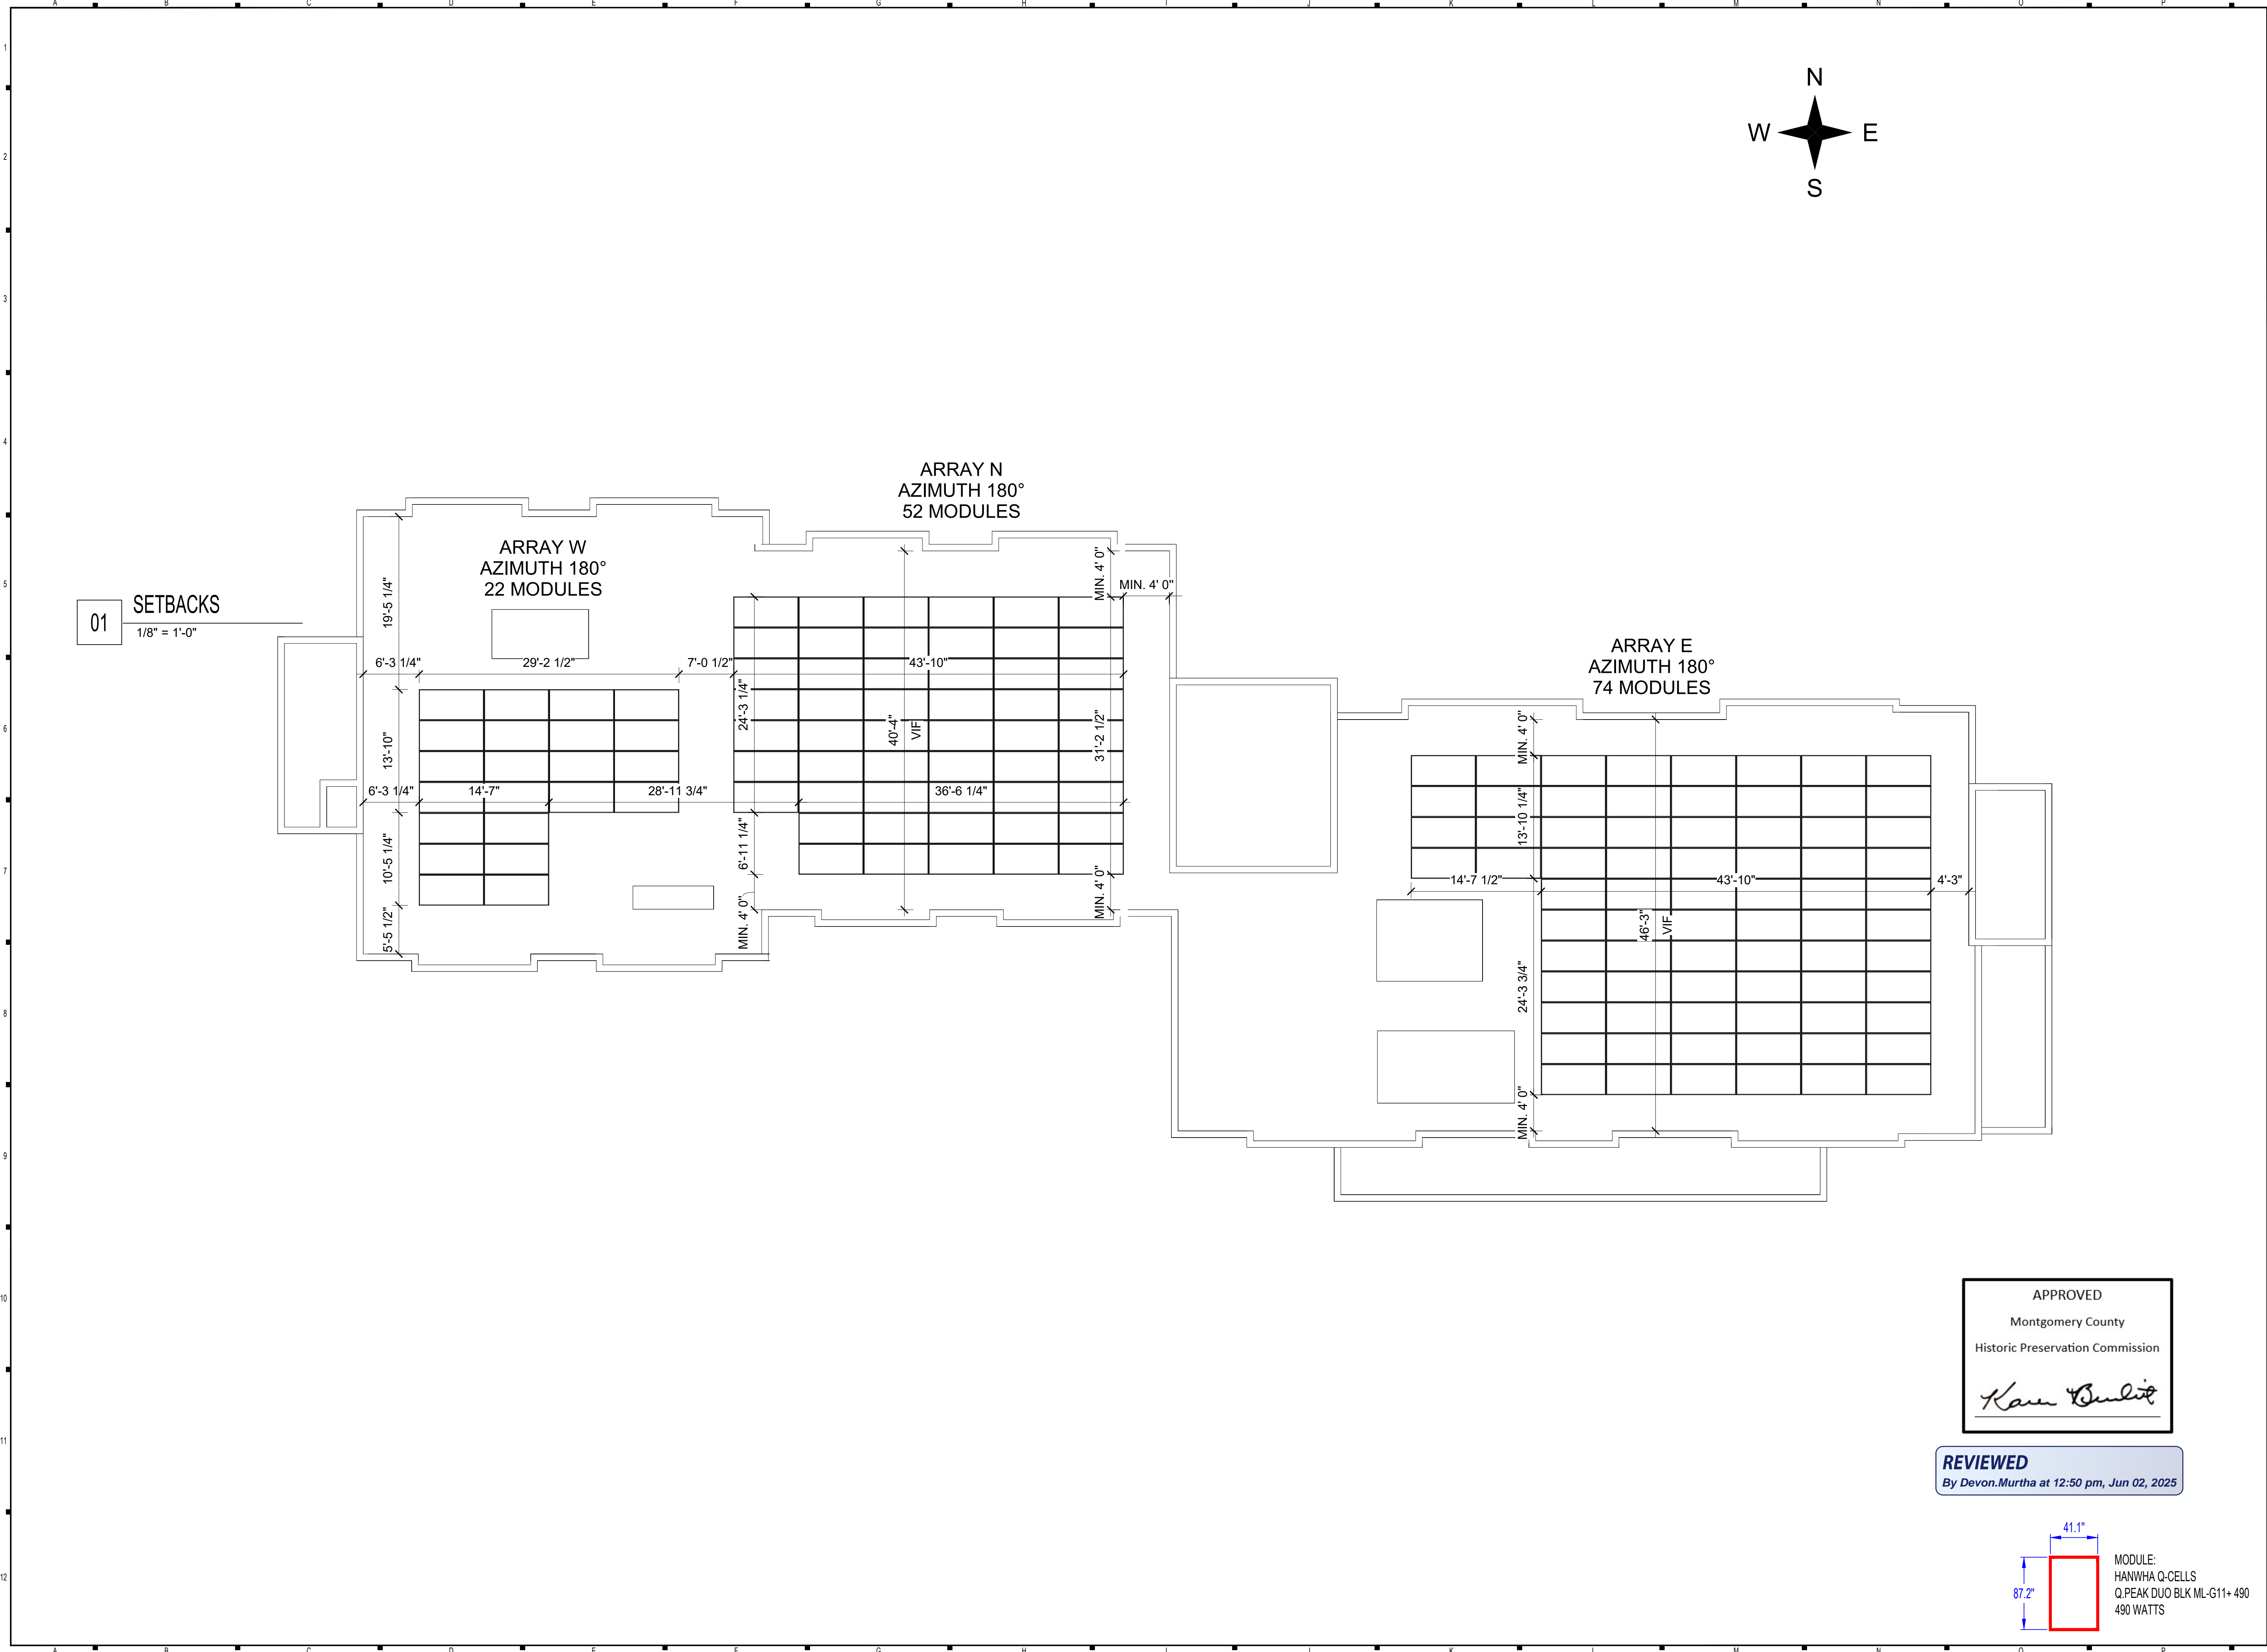

CONTRACTOR

UNIVERSAL RENEWABLES

ADDRESS: 3516 MASSACHUSETTS AVE NW WASHINGTON, DC 20007

PHONE: 202.956.8565

LIC. NO.:

REVISION / RELEASE

NO.	DESCRIPTION	DATE

PROJECT

NEW PV SYSTEM: 72.520 kWp

VICTORY TOWER

7051 CARROLL AVENUE, TAKOMA  
PARK, MD 20912  
APN: 01072074

ENGINEER OF RECORD

PAPER SIZE: 36" x 24" (ARCH D)

SHEET TITLE:  
SETBACKS

DATE: 11.07.2024

DESIGN BY: V.G.

CHECKED BY: M.M.

SHEET NUMBER:

Z-002




Z-003



7051 Carrol Ave, Takoma Park  
Northerly Oblique View

Building designated as a non-contributing resource

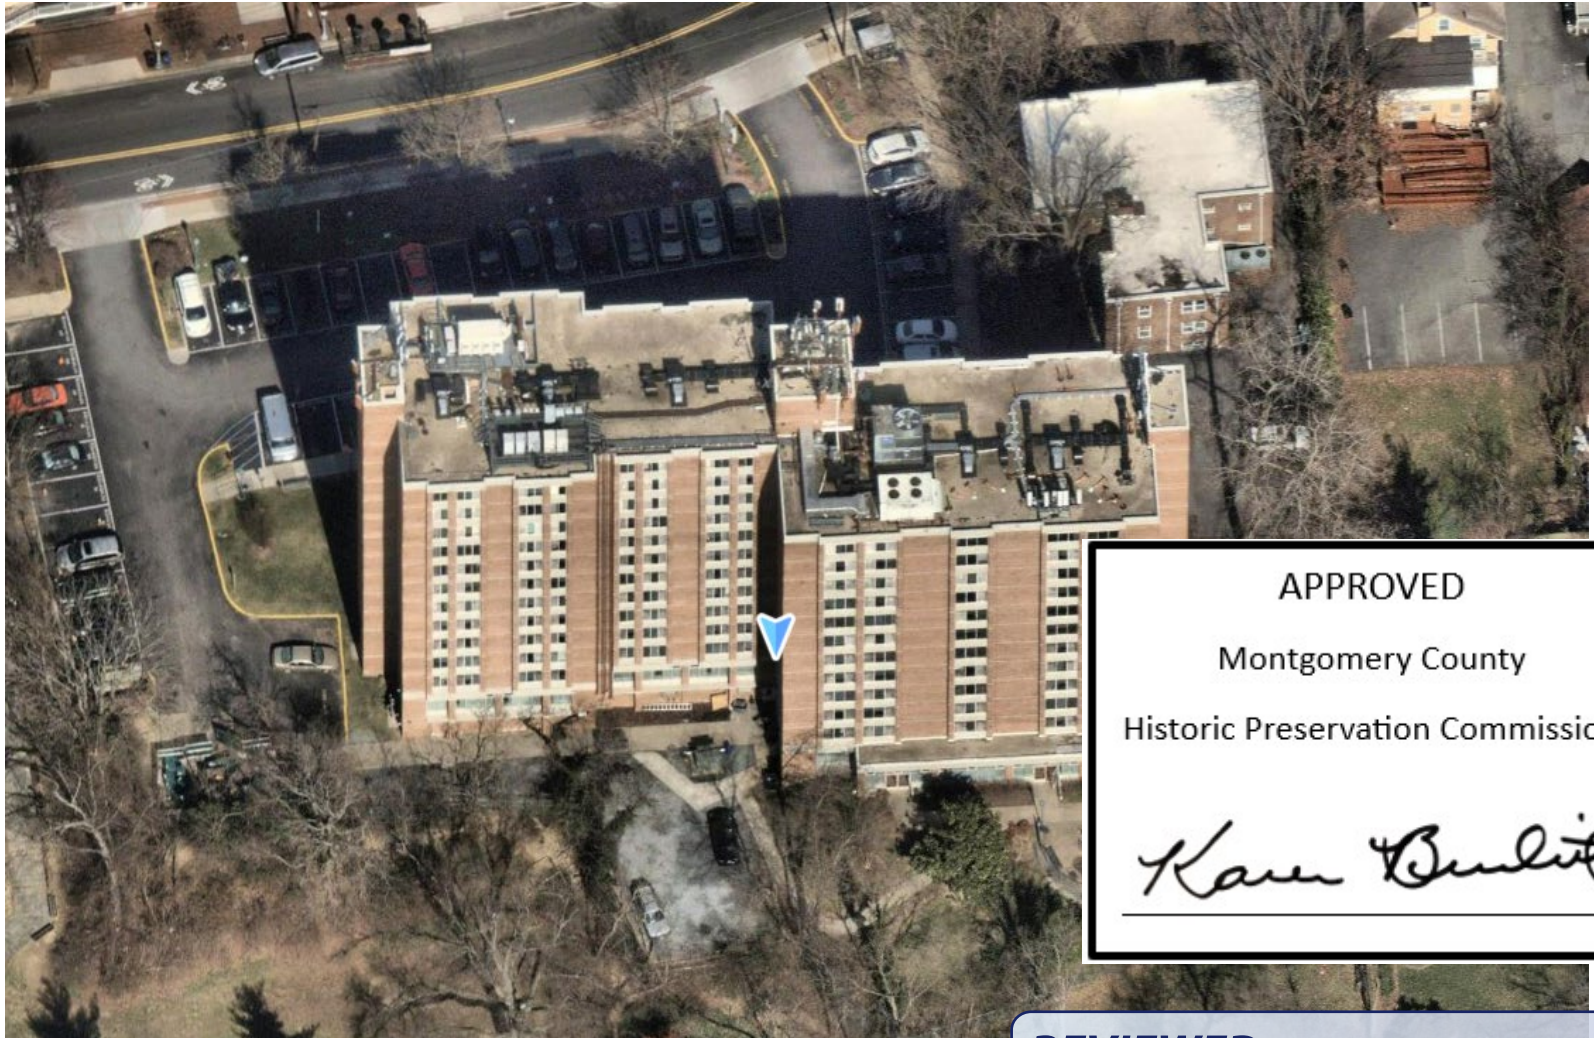

APPROVED

Montgomery County

Historic Preservation Commission


*Karen B. Smith*

**REVIEWED**

By Devon.Murtha at 12:50 pm, Jun 02, 2025



7051 Carrol Ave, Takoma Park  
Southerly Oblique View

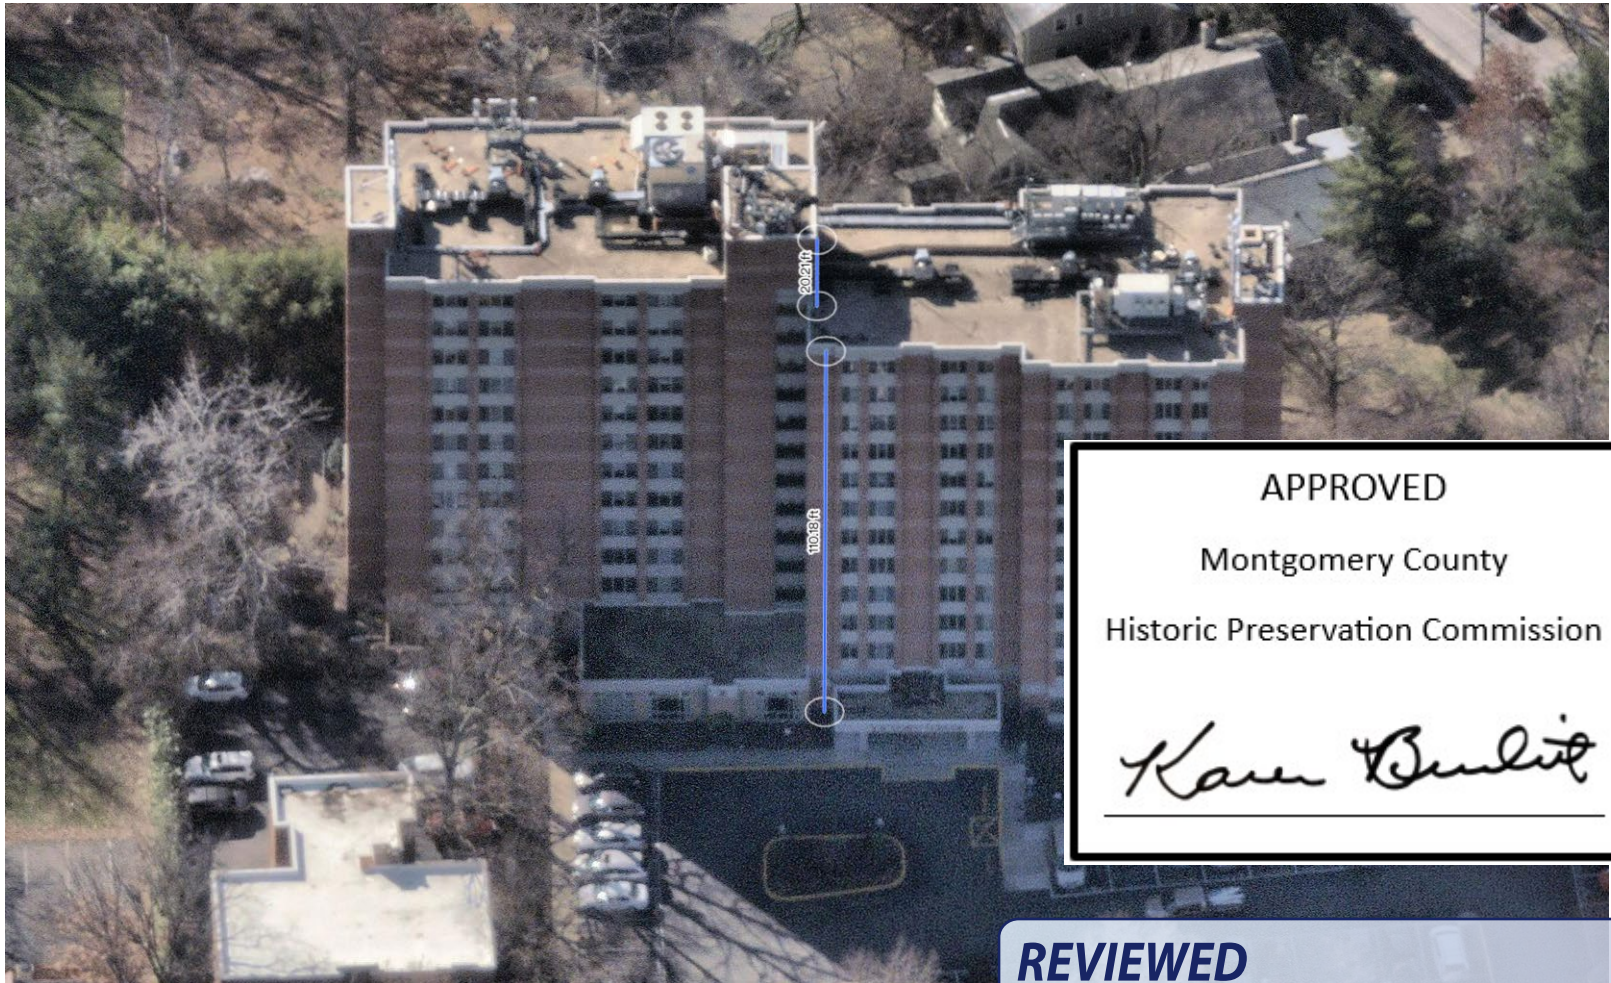

APPROVED  
Montgomery County  
Historic Preservation Commission

*Karen Benoit*


**REVIEWED**

By Devon.Murtha at 12:50 pm, Jun 02, 2025



Arial View – Proposed Solar Arrays  
Victory Towers  
7051 Carroll Ave

Historic Review  
Solar Installation  
7051 Carrol Ave  
Takoma Park, md

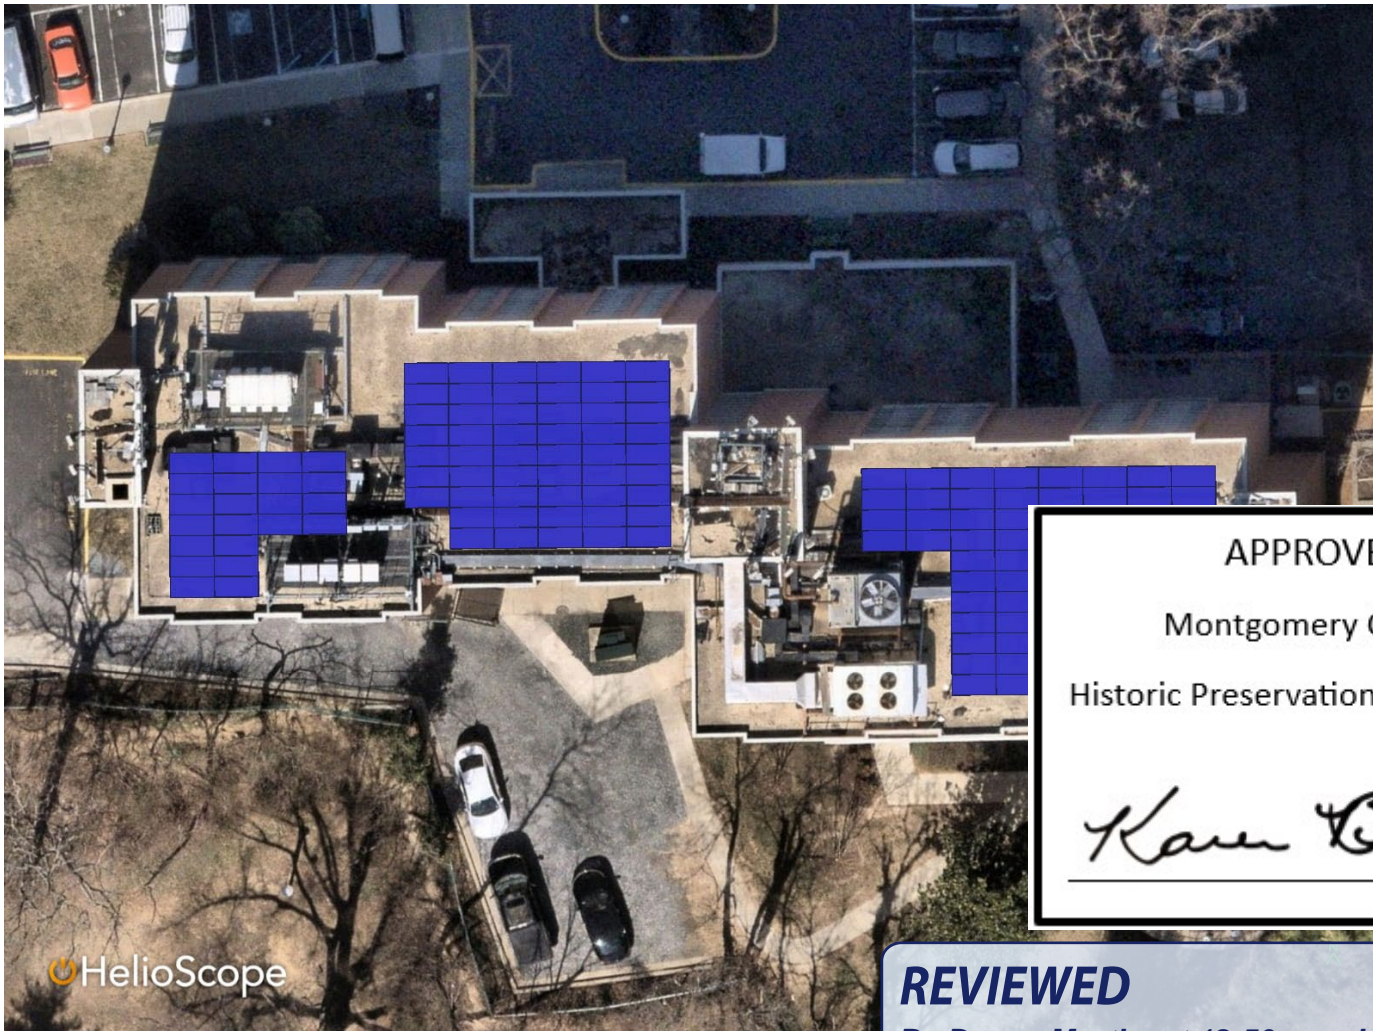

**REVIEWED**

By Devon.Murtha at 12:50 pm, Jun 02, 2025



Easterly Street View  
Carrol Ave  
PV system not visible all year



APPROVED

Montgomery County

Historic Preservation Commission

*Karen Benoit*

**REVIEWED**

By Devon.Murtha at 12:50 pm, Jun 02, 2025



Southeasterly Street View  
Carrol Ave  
PV System Not Visible All Year



APPROVED

Montgomery County

Historic Preservation Commission

*Karen Bunkit*

**REVIEWED**

By Devon.Murtha at 12:50 pm, Jun 02, 2025



Southerly Street View  
Carrol Ave  
PV System Not Visible All Year



APPROVED

Montgomery County

Historic Preservation Commission

*Karen Bunkit*


**REVIEWED**

By Devon.Murtha at 12:50 pm, Jun 02, 2025



Southerly Street View  
Carrol Ave & Park Ave  
PV System Slightly Visible in Winter

Historic Review  
Solar Installation  
7051 Carrol Ave  
Takoma Park, md

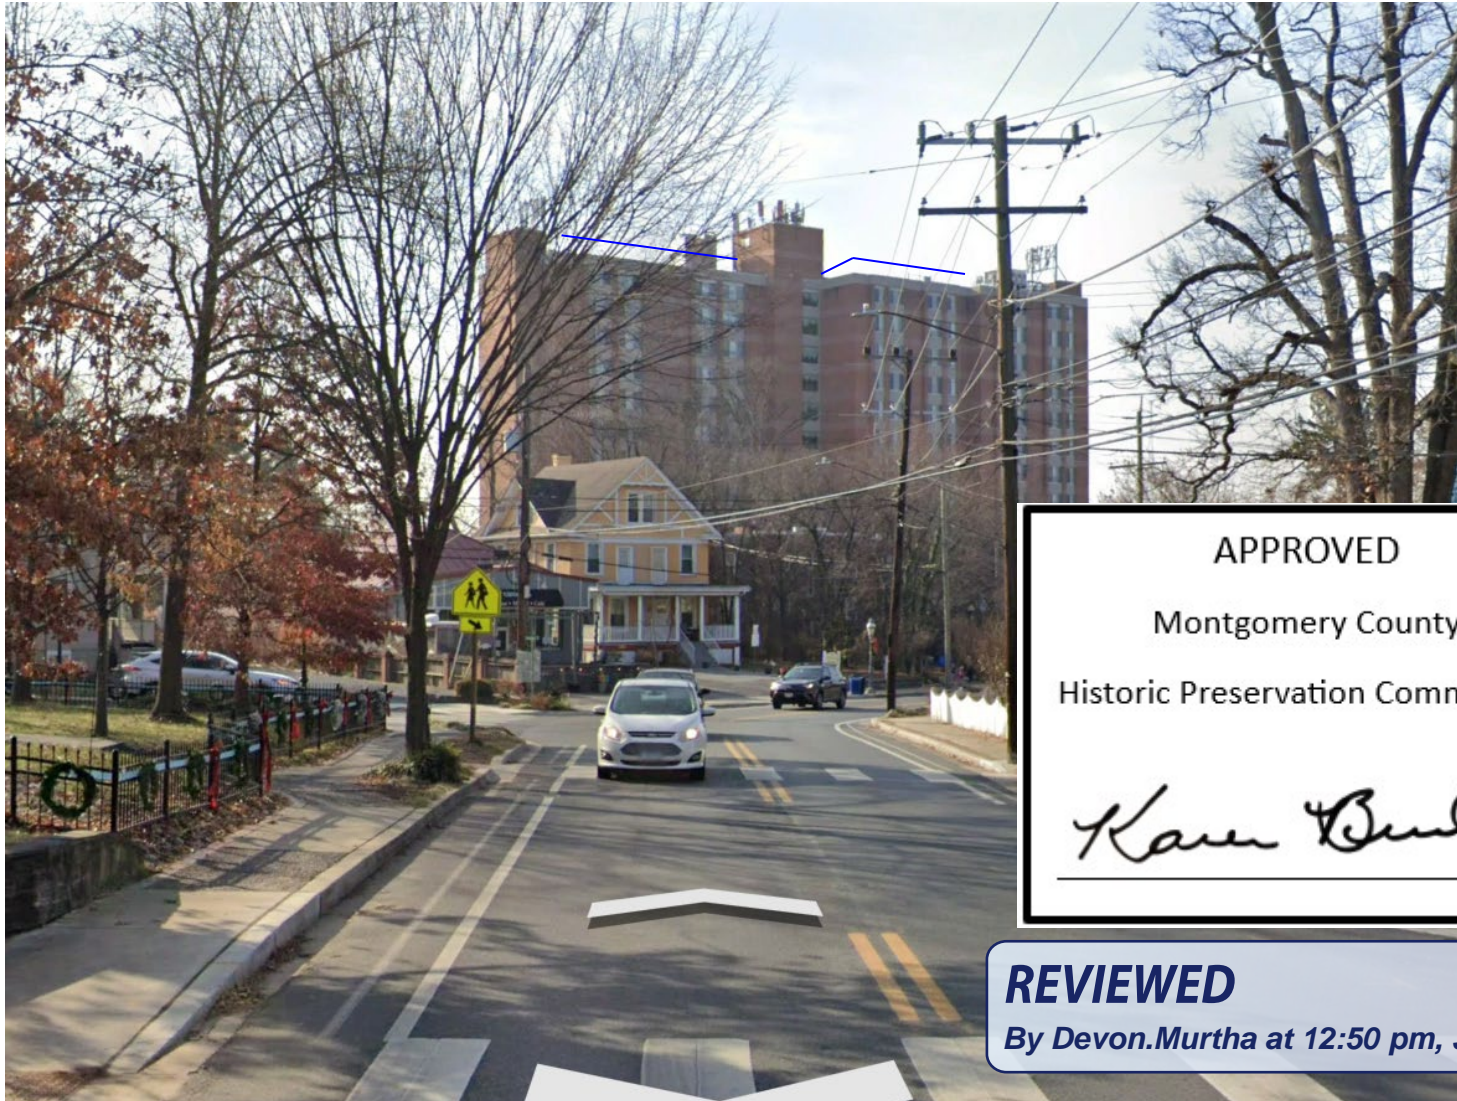

APPROVED

Montgomery County

Historic Preservation Commission

*Karen Bunkle*

**REVIEWED**

By Devon.Murtha at 12:50 pm, Jun 02, 2025



Southerly Street View  
Carrol Ave & Columbia Ave  
PV System Slightly Visible All Year

Historic Review  
Solar Installation  
7051 Carrol Ave  
Takoma Park, md



APPROVED

Montgomery County

Historic Preservation Commission


*Karen Buehl*

**REVIEWED**

By Devon.Murtha at 12:50 pm, Jun 02, 2025

## PHOTOGRAPHS BY LOCATION

Historic Review  
Solar Installation  
7051 Carrol Ave  
Takoma Park, md

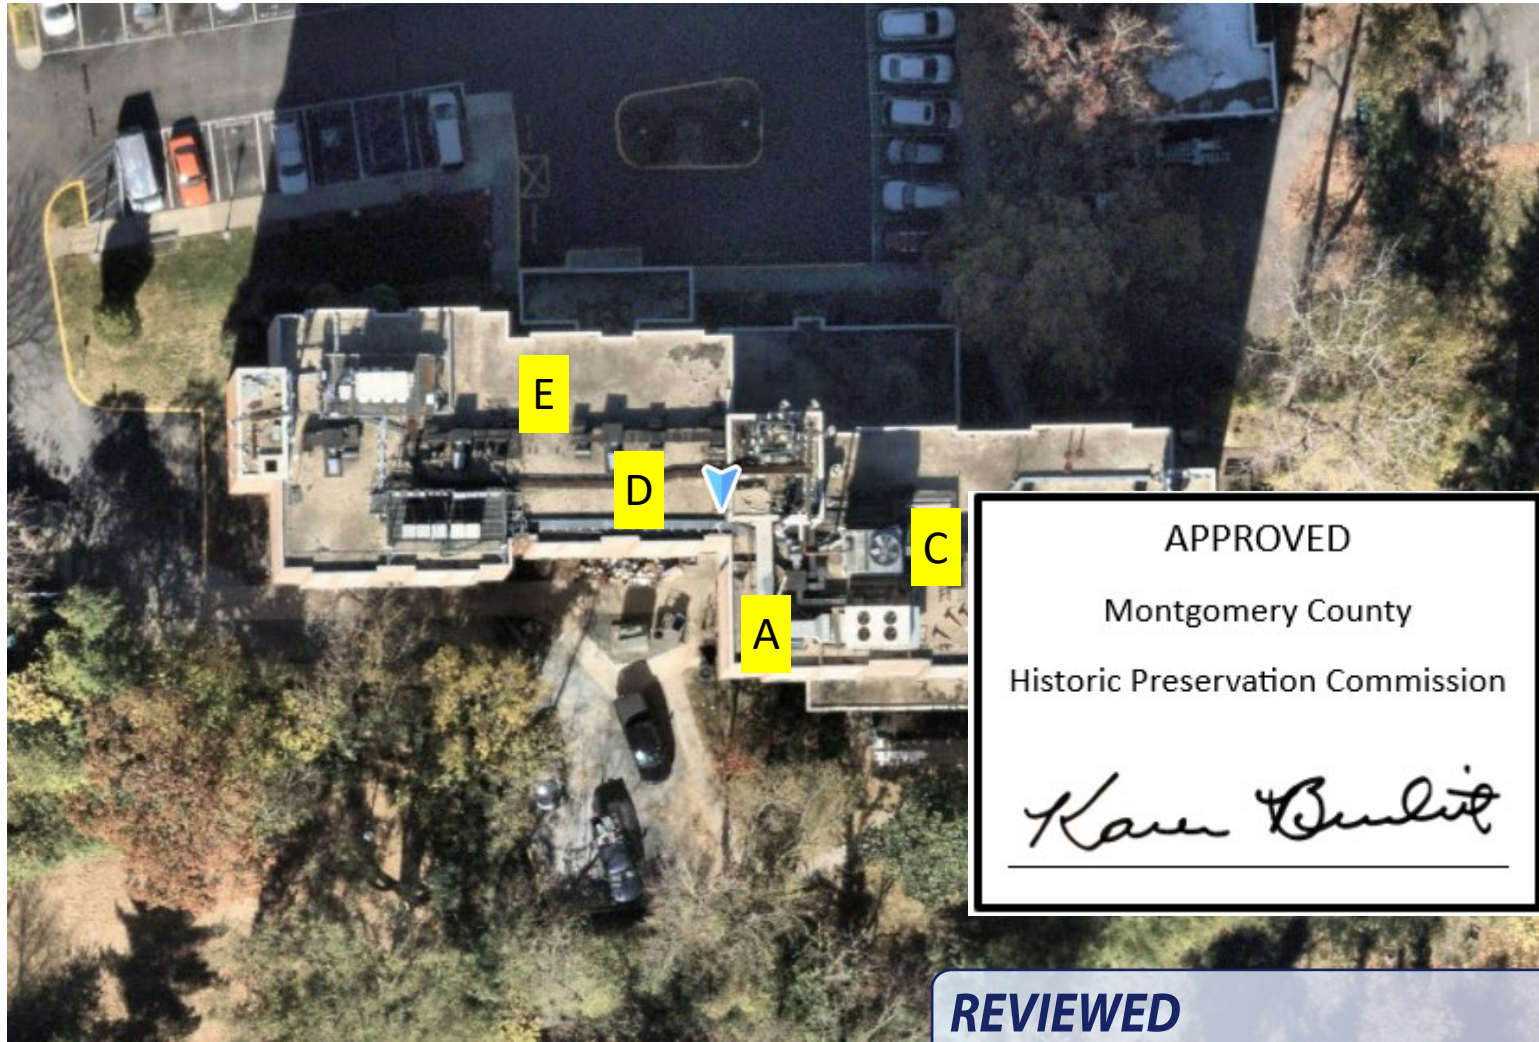

**REVIEWED**

By Devon.Murtha at 12:50 pm, Jun 02, 2025



## PHOTOGRAPHS SERIES A

Historic Review  
Solar Installation  
7051 Carrol Ave  
Takoma Park, md



**REVIEWED**

By Devon.Murtha at 12:50 pm, Jun 02, 2025



## PHOTOGRAPHS B & C SERIES

Historic Review  
Solar Installation  
7051 Carrol Ave  
Takoma Park, md

WESTERLY




NORTHWEST



SOUTHERLY



NORTH

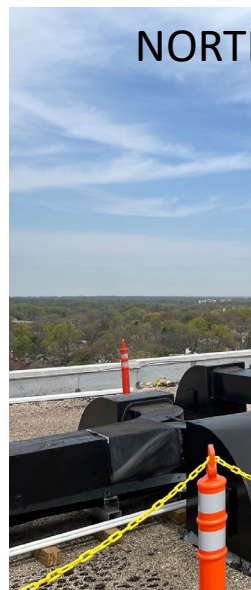

APPROVED

Montgomery County

Historic Preservation Commission

*Karen Buelit*


**REVIEWED**

By Devon.Murtha at 12:50 pm, Jun 02, 2025



## PHOTOGRAPHS D & E SERIES

Historic Review  
Solar Installation  
7051 Carrol Ave  
Takoma Park, md

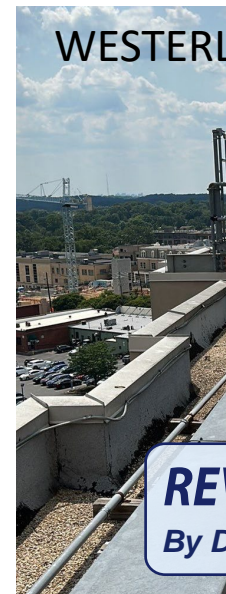


**REVIEWED**

By Devon.Murtha at 12:50 pm, Jun 02, 2025



PHOTOGRAPHS  
TYPICAL ELEVATED PV SYSTEM  
1202 R STREET NW

Historic Review  
Solar Installation  
7051 Carrol Ave  
Takoma Park, md

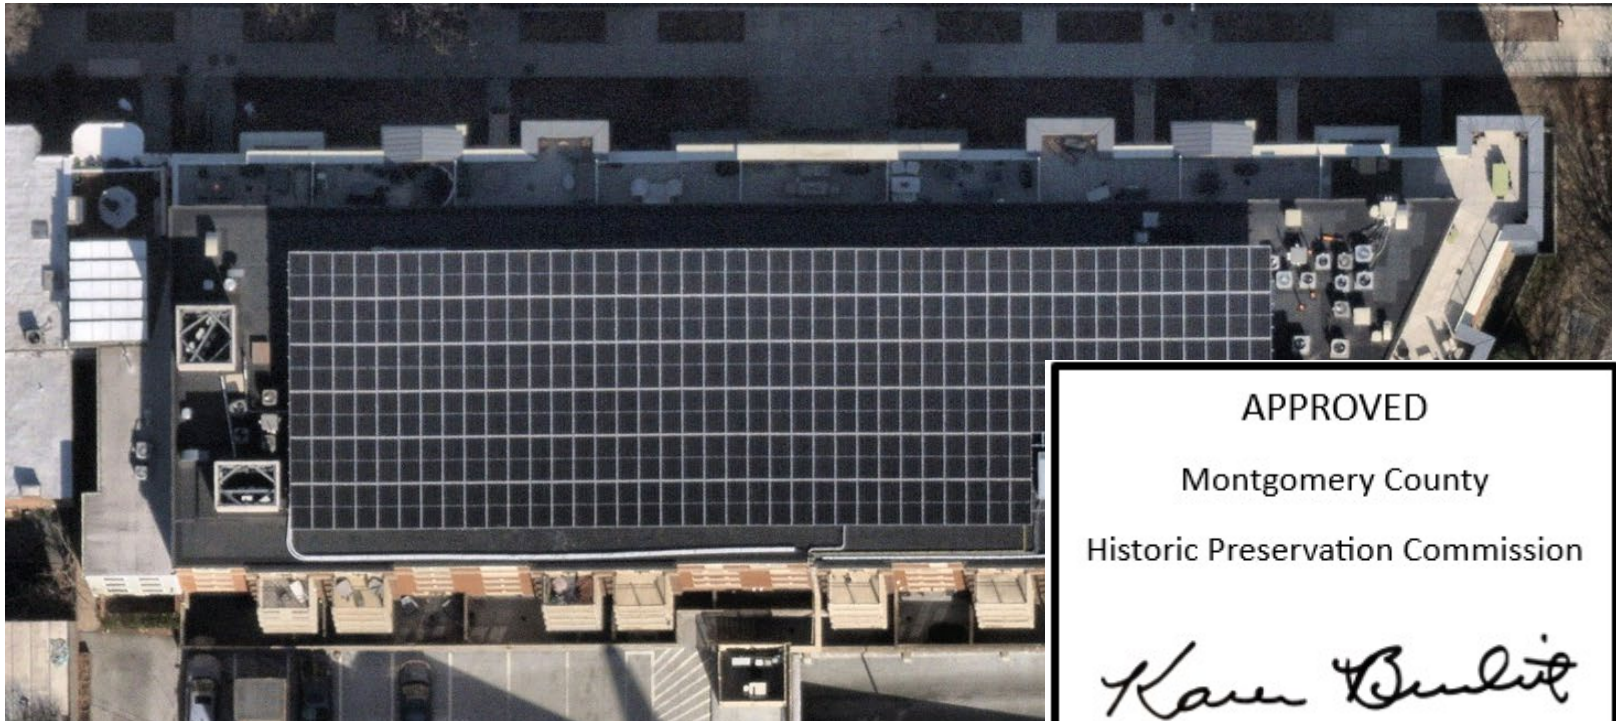

APPROVED

Montgomery County

Historic Preservation Commission



**REVIEWED**

*By Devon.Murtha at 12:50 pm, Jun 02, 2025*



PHOTOGRAPHS  
TYPICAL ELEVATED PV SYSTEM  
1202 R STREET NW

Historic Review  
Solar Installation  
7051 Carrol Ave  
Takoma Park, md



APPROVED

Montgomery County

Historic Preservation Commission

*Karen Benoit*

**REVIEWED**

By Devon.Murtha at 12:50 pm, Jun 02, 2025



PHOTOGRAPHS  
TYPICAL ELEVATED PV SYSTEM  
3902 14<sup>TH</sup> Street NW  
[approved by Fine Arts Commission]

Historic Review  
Solar Installation  
7051 Carrol Ave  
Takoma Park, md



APPROVED

Montgomery County

Historic Preservation Commission

*Karen Benoit*

**REVIEWED**

By Devon.Murtha at 12:50 pm, Jun 02, 2025



PHOTOGRAPHS  
TYPICAL ELEVATED PV SYSTEM  
3801 CONNECTICUT AVENUE NW  
VIEW ACROSS ROCKCREEK PARK

Historic Review  
Solar Installation  
7051 Carrol Ave  
Takoma Park, md



APPROVED

Montgomery County

Historic Preservation Commission

*Karen Bunkle*

**REVIEWED**

By Devon.Murtha at 12:50 pm, Jun 02, 2025

PHOTOGRAPHS  
TYPICAL ELEVATED PV SYSTEM  
3902 14<sup>TH</sup> STREET NW  
VIEW FROM 14<sup>TH</sup> STREET

Historic Review  
Solar Installation  
7051 Carrol Ave  
Takoma Park, md



APPROVED

Montgomery County

Historic Preservation Commission

*Kara Buelit*

**REVIEWED**

By Devon.Murtha at 12:50 pm, Jun 02, 2025